

EMC TEST REPORT

For

Mid Ocean Brands B.V.

Bamboo wireless charge stand

Test Model: MO9692

Prepared for : Mid Ocean Brands B.V.
Address : Unit 711- 716, 7/F., Tower A, 83 King Lam Street,
Cheung Sha Wan, Kowloon, Hong Kong.

Prepared by : Shenzhen SIT Testing Technology Co., Ltd.
Address : Room 401, Building A2, The 2nd Industrial Zone of Zhu'ao,
Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong,
China

Tel : (+86)755-29173399
Fax : (+86)755-29179933

Date of receipt of test sample : October 29, 2025
Number of tested samples : 1
Serial number : Prototype
Date of Test : October 29, 2025~ November 05, 2025
Date of Report : November 05, 2025



EMC TEST REPORT
ETSI EN 301 489-3 V2.3.2 (2023-01)

ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

Report Reference No. : SIT251027160503ER-1

Date Of Issue : November 05, 2025

Testing Laboratory Name : Shenzhen SIT Testing Technology Co., Ltd.Address : Room 401, Building A2, The 2nd Industrial Zone of Zhu'ao,
Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name : Mid Ocean Brands B.V.**Address : Unit 711-716, 7/F., Tower A, 83 King Lam Street,
Cheung Sha Wan, Kowloon, Hong Kong.**Test Specification**Standard : ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)

Test Report Form No. : EMC-1.0

TRF Originator : Shenzhen SIT Testing Technology Co., Ltd.

Master TRF : Dated 2017-02


Shenzhen SIT Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen SIT Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen SIT Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Bamboo wireless charge stand

Trade Mark : N/A

Test Model : MO9692

Ratings : Input: 5V $\Rightarrow$ 2A, 9V $\Rightarrow$ 2A
Output (Wireless): 5V $\Rightarrow$ 1A, 7.5V $\Rightarrow$ 1A, 9V $\Rightarrow$ 1.1A, 9V $\Rightarrow$ 1.66A**Result : Positive****Tested By:**

Debe Yu / Test Engineer

Reviewed By:

Jessica / Project Engineer

Approved By:

Kevin Sun / Manager

EMC -- TEST REPORT

Test Report No. : SIT251027160503ER-1November 05, 2025

Date of issue

Test Model : MO9692

EUT..... : Bamboo wireless charge stand

Applicant..... : Mid Ocean Brands B.V.Address..... : Unit 711- 716, 7/F., Tower A, 83 King Lam Street,
Cheung Sha Wan, Kowloon, Hong Kong.

Telephone..... : /

Fax..... : /

Manufacturer..... : 114628

Address..... : -

Telephone..... : /

Fax..... : /

Factory..... : 114628

Address..... : -

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	November 04, 2025	Initial Issue	Kevin Sun

TABLE OF CONTENT

Test Report Description	Page
TABLE OF CONTENT	5
1. GENERAL INFORMATION	7
1.1. Product Description for Equipment Under Test (EUT).....	7
1.2. Objective.....	7
1.3. Related Submittal(s)/Grant(s).....	7
1.4. Test Methodology.....	7
1.5. Description of Test Facility.....	8
1.6. Support equipment List.....	8
1.7. External I/O.....	8
1.8. Measurement Uncertainty.....	8
1.9. Description Of Test Modes.....	8
2. SUMMARY OF TEST RESULTS	9
3. LINE CONDUCTED EMISSION	10
3.1. CONDUCTED EMISSION LIMIT	10
3.2. TEST CONFIGURATION.....	10
3.3. EMI TEST RECEIVER SETUP.....	10
3.4. TEST PROCEDURE.....	11
4. RADIATED DISTURBANCE	13
4.1. Radiated Emission Limit	13
4.2. Test Configuration.....	13
4.3. Test Procedure.....	13
4.4. Test Data.....	13
5. HARMONIC CURRENT EMISSIONS	16
5.1. Test Configuration.....	16
5.2. Test Standard.....	16
5.3. Test Data.....	16
6. VOLTAGE FLUCTUATION AND FLICKER	17
6.1. Test Configuration.....	17
6.2. Test Standard.....	17
7. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST	18
7.1. Performance criteria for Continuous phenomena applied to Transmitter (CT).....	18
7.2. Performance criteria for Transient phenomena applied to Transmitter (TT).....	18
7.3. Performance criteria for Continuous phenomena applied to Receiver (CR).....	18
7.4. Performance criteria for Transient phenomena applied to Receiver (TR).....	18
8. RF ELECTROMAGNETIC FIELD (80 MHZ -6000 MHZ)	19
8.1. Test Configuration.....	19
8.2. Test Standard.....	20
8.3. Severity Level.....	20
8.4. Test Procedure.....	20
8.5. Test Result.....	21
9. ELECTROSTATIC DISCHARGE	22
9.1. Test Configuration.....	22
9.2. Test Procedure.....	22
9.3. Test Data.....	23
10. ELECTRICAL FAST TRANSIENT IMMUNITY	25

10.1. Test Configuration	25
10.2. Test Standard	25
10.3. Test Procedure	26
10.4. Test Data	26
11. RF COMMON MODE	28
11.1. Test Configuration	28
11.2. Test Standard	28
11.3. Test Procedure	29
11.4. Test Data	29
12. SURGES, LINE TO LINE AND LINE TO GROUND	31
12.1. Test Configuration	31
12.2. Test Standard	31
12.3. Test Procedure	31
12.4. Test Data	32
13. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST	33
13.1. Test Configuration	33
13.2. Test Standard	33
13.3. Test Procedure	33
13.4. Test Data	34
14. LIST OF MEASURING EQUIPMENT	35
15. PHOTOGRAPHS OF TEST SETUP.....	36
16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	37

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	: Bamboo wireless charge stand
Test Model	: MO9692
Power Supply	: Input: 5V $\rightleftharpoons$ 2A, 9V $\rightleftharpoons$ 2A Output (Wireless): 5V $\rightleftharpoons$ 1A, 7.5V $\rightleftharpoons$ 1A, 9V $\rightleftharpoons$ 1.1A, 9V $\rightleftharpoons$ 1.66A
Number of Channels	: 1
Modulation Type	: GSFK
Antenna Description	: Ferrite Antenna, 2 dBi(Max.)

1.2. Objective

ETSI EN 301 489-1	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU and the essential requirements of article 6 of Directive 2014/30/EU
ETSI EN 301 489-3	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU

The objective is to determine compliance with ETSI EN 301 489-1 V2.2.3 (2019-11) and ETSI EN 301 489-3 V2.3.2 (2023-01).

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3 (2019-11) and ETSI EN 301 489-3 V2.3.2 (2023-01).

1.5. Description of Test Facility

Not mentioned for the time being

1.6. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.7. External I/O

I/O Port Description	Quantity	Cable
USB port	1	--

1.8. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	0.01ppm	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2℃	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

1.9. Description Of Test Modes

TM1: Normal operation

TM2: Idle

***Note:

All test modes were tested, but we only recorded the worst case in this report.

2. SUMMARY OF TEST RESULTS

Rule	Description of Test Items	Result
§7.1	Reference to clauses EN 301 489-1 §8.4 AC mains power input/output ports	N/A
§7.1	Reference to clauses EN 301 489-1§8.3 DC power input/output ports	Compliant
§7.1	Reference to clauses EN 301 489-1 §8.2 Enclosure of ancillary equipment measured on a stand alone basis	Compliant
§7.1	Reference to clauses EN 301 489-1 §8.5 Harmonic current emissions (AC mains input port)	N/A
§7.1	Reference to clauses EN 301 489-1 §8.6 Voltage fluctuations and flicker (AC mains input port)	N/A
§7.1	Reference to clauses EN 301 489-1§8.7 Telecommunication ports	N/A
§7.2	Reference to clauses EN 301 489-1 §9.3 Electrostatic discharge (EN 61000-4-2)	Compliant
§7.2	Reference to clauses EN 301 489-1 §9.2 Radio frequency electromagnetic field (80 MHz to 6 000 MHz)(EN IEC 61000-4-3)	Compliant
§7.2	Reference to clauses EN 301 489-1§9.4 Fast transients, common mode (EN 61000-4-4)	N/A
§7.2	Reference to clauses EN 301 489-1§9.8 Surges (EN 61000-4-5)	N/A
§7.2	Reference to clauses EN 301 489-1§9.5 Radio frequency, common mode (EN IEC 61000-4-6)	N/A
§7.2	Reference to clauses EN 301 489-1 §9.6 Transients and surges in the vehicular environment (ISO 7637-2)	N/A
§7.2	Reference to clauses EN 301 489-1§9.7 Voltage dips and interruptions (EN IEC 61000-4-11)	N/A

3. LINE CONDUCTED EMISSION


3.1. Conducted Emission Limit

ETSI EN 301 489-1 V2.2.3 (2019-11)/EN 55032 Class B

Limits for Power Line Conducted Emission

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0
NOTE1-The lower limit shall apply at the transition frequencies.		
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

3.2. Test Configuration

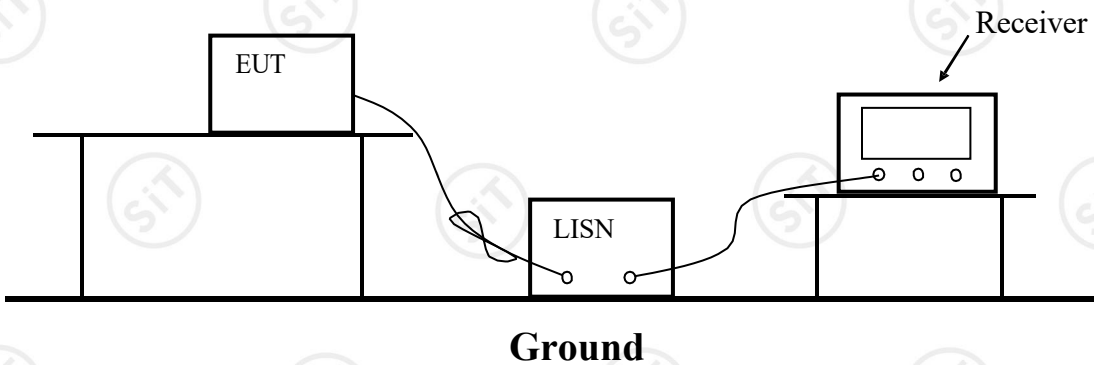

The setup of EUT is according with per ETSI EN 301 489-1 measurement procedure. The specification used was with the ETSI EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.
The spacing between the peripherals was 10 cm.

The EUT received DC 5V Charging power from adapter which received power through a LISN supplying power of DC 5V/50Hz.

3.3. EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IFBW
150 kHz – 30 MHz	9 kHz

3.4. Test Procedure

Power on the EUT, the EUT begins to work. Make sure the EUT operates normally during the test.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

4. RADIATED DISTURBANCE

4.1. Radiated Emission Limit

ETSI EN 301 489-1 V2.2.3 (2019-11)/EN 55032 Class B

Limits for radiated disturbance Blow 1GHz

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dBμV/m)
30 ~ 230	3	40
230 ~ 1000	3	47


Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

Limits for radiated disturbance Above 1GHz

FREQUENCY (MHz)	DISTANCE (Meters)	Average Limit (dBμV/m)	Peak Limit (dBμV/m)
1000-3000	3	50	70
3000-6000	3	54	74

Note: The lower limit applies at the transition frequency.

4.2. Test Configuration

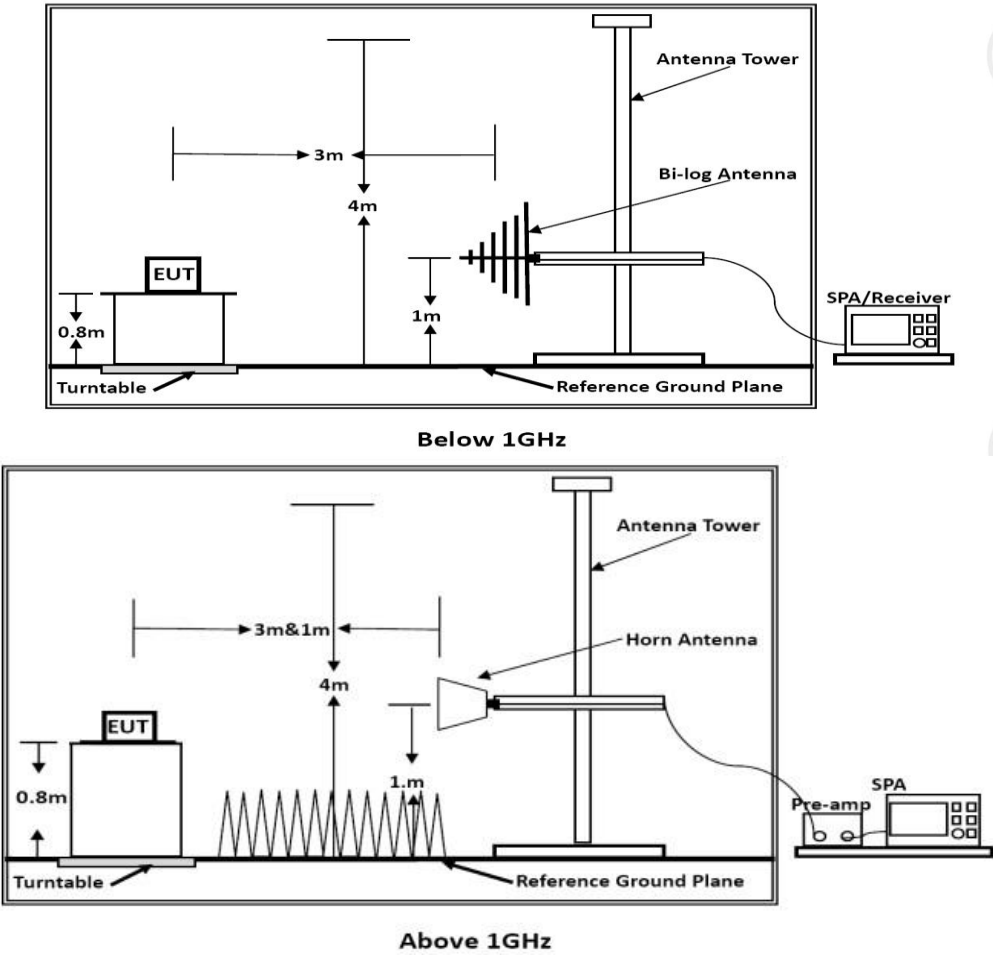

4.3. Test Procedure

Please refer to ETSI EN 301 489-1 Clause 8.2.3 and EN 55032 Annex A.2 for the measurement methods.

4.4. Test Data

The worst test mode of the EUT was TM1, and its test data was showed as the follow:

Model No.	MO9692	Test Mode	DC 5V
Environmental Conditions	24°C,44.2% RH	Detector Function	Quasi-peak
Pol	Vertical	Distance	3m
Test Engineer	DebeYu	Test date:	November 03, 2025


Radiated Emission Measurement



No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1	53.5052	29.63	-11.30	18.33	40.00	-21.67	peak		
2	84.1100	37.41	-15.40	22.01	40.00	-17.99	peak		
3	138.8735	35.02	-10.54	24.48	40.00	-15.52	peak		
4 *	192.4186	46.44	-13.47	32.97	40.00	-7.03	peak		
5	280.0237	34.09	-10.50	23.59	47.00	-23.41	peak		
6	428.0193	30.67	-6.91	23.76	47.00	-23.24	peak		

Model No.	MO9692	Test Mode	DC 5V
Environmental Conditions	24°C,44.2% RH	Detector Function	Quasi-peak
Pol	Horizontal	Distance	3m
Test Engineer	DebeYu	Test date:	November 03, 2025

Radiated Emission Measurement

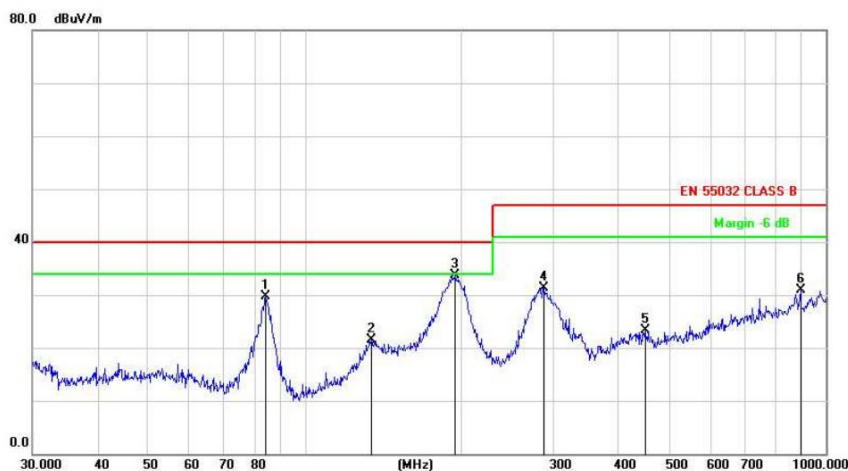


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1	84.1100	45.06	-15.40	29.66	40.00	-10.34	peak		
2	134.0882	32.38	-10.87	21.51	40.00	-18.49	peak		
3 *	194.4534	47.36	-13.58	33.78	40.00	-6.22	peak		
4	287.9904	41.53	-10.13	31.40	47.00	-15.60	peak		
5	449.5558	29.81	-6.49	23.32	47.00	-23.68	peak		
6	893.8567	30.09	0.91	31.00	47.00	-16.00	peak		

Test Mode: TM1(above 1GHz)	Tested by: DebeYu
Test voltage: DC 5V	Test Distance: 3m
Detector Function: Peak+AV	Test Results: Passed

Frequency MHz	Emission Level dB μ V/m		Limits dB μ V/m		Margin dB μ V/m		Polarization
	Peak	AV	Peak	AV	Peak	AV	
1352.37	50.14	37.49	70	50	-19.86	-12.51	H
1879.53	47.69	36.44	70	50	-22.31	-13.56	H
2191.53	49.22	37.35	70	50	-20.78	-12.65	H
3291.78	51.64	36.95	70	54	-18.36	-17.05	H
4330.17	54.27	34.05	70	54	-15.73	-19.95	H
5888.35	53.68	37.84	70	54	-16.32	-16.16	H
1351.38	53.45	37.42	70	50	-16.55	-12.58	V
1878.53	54.12	36.99	70	50	-15.88	-13.01	V
2190.06	57.84	37.47	70	50	-12.16	-12.53	V
3295.04	56.29	36.58	70	54	-13.71	-17.42	V
4332.73	56.85	37.21	70	54	-13.15	-16.79	V
5882.40	57.63	37.84	70	54	-12.37	-16.16	V

5. HARMONIC CURRENT EMISSIONS

5.1. Test Configuration

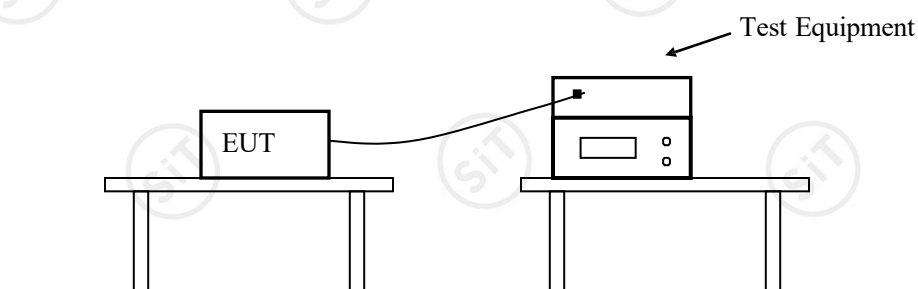

5.2. Test Standard


According to ETSI EN 301 489-1 V2.2.3 (2019-11)& EN 61000-3-2: 2019+A2:2024

5.3. Test Data

Because power of EUT less than 75W, According standard EN 61000-3-2, Harmonic current unnecessary to test.

6. VOLTAGE FLUCTUATION AND FLICKER

6.1. Test Configuration

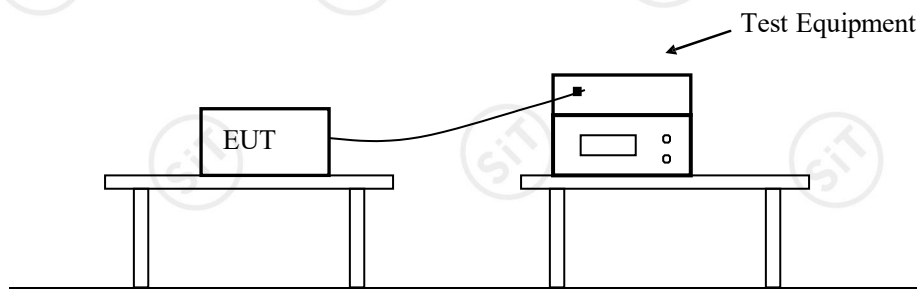

6.2. Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11)& EN 61000-3-3:2013+A2:2021

7. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST

7.1. Performance criteria for Continuous phenomena applied to Transmitter (CT)

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence.

Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

7.2. Performance criteria for Transient phenomena applied to Transmitter (TT)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

7.3. Performance criteria for Continuous phenomena applied to Receiver (CR)

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

7.4. Performance criteria for Transient phenomena applied to Receiver (TR)


For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

Performance criteria for ETSI EN 301 489-3 V2.3.2 (2023-01)

Criterion	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

8. RF ELECTROMAGNETIC FIELD (80 MHZ -6000 MHZ)

8.1. Test Configuration

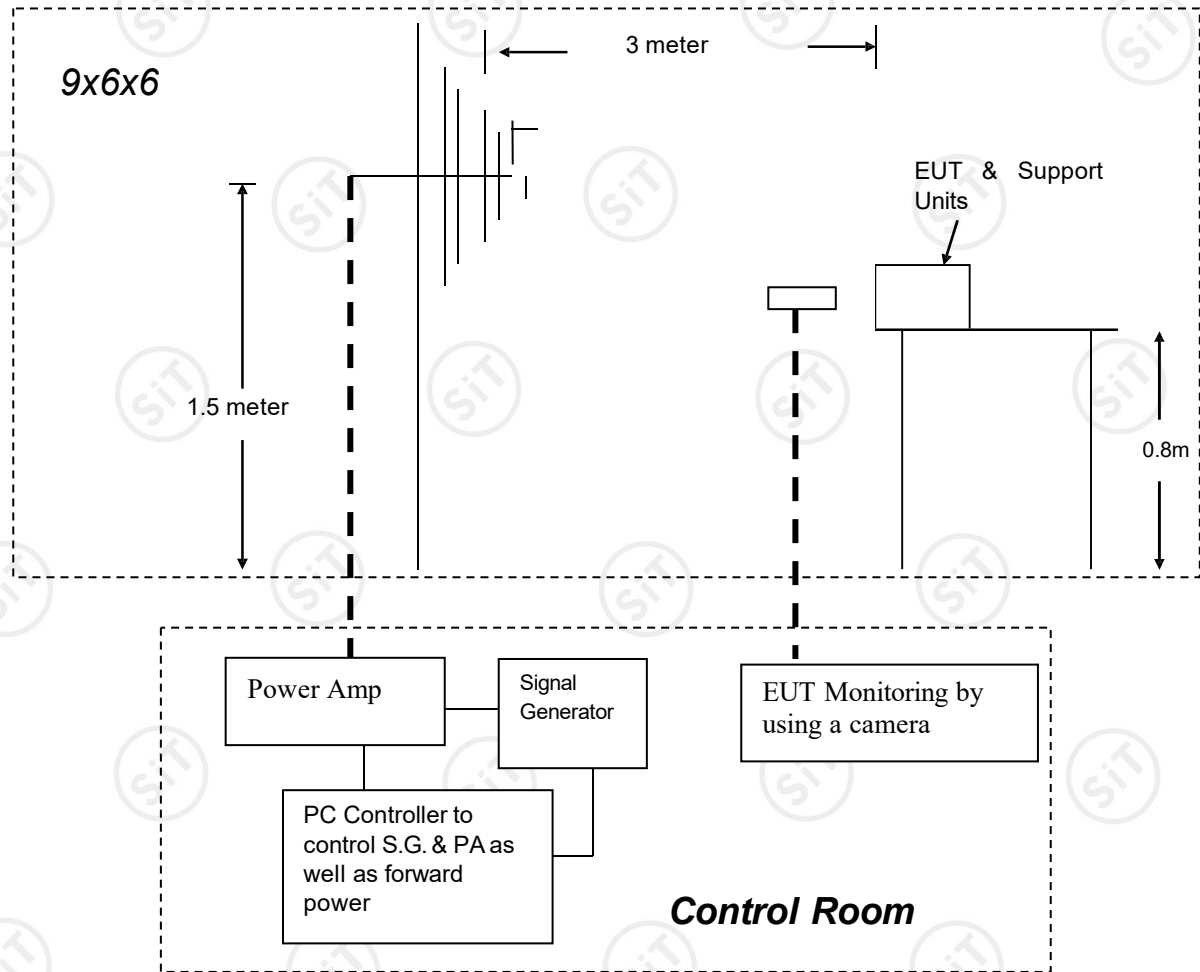

8.2. Test Standard

ETSI EN 301 489-1, ETSI EN 301 489-3(EN IEC 61000: 2020)

Test level 2 at 3V / m.

8.3. Severity Level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

Performance criterion: A

8.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80 - 6000 MHz
4. Dwell time of radiated	0.0015 decade/s
5. Waiting Time	3 Sec.

8.5. Test Result

RF ELECTROMAGNETIC FIELD			
Standard	☐ IEC 61000-4-3 ☒ EN IEC 61000		
Applicant	Mid Ocean Brands B.V.		
EUT	Bamboo wireless charge stand	Temperature	24℃
M/N	MO9692	Humidity	44.2%
Test Mode	TM1-TM2	Criterion	B
Test Engineer	DebeYu	Test Date	November 03, 2025


EUT Working Mode	Antenna Polarity	Frequency (MHz)	Field Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

***Note: Unintentional transmission is not founded from the EUT.

9. ELECTROSTATIC DISCHARGE

Please refer to ETSI EN 301 489-1 and EN 61000-4-2.

9.1. Test Configuration

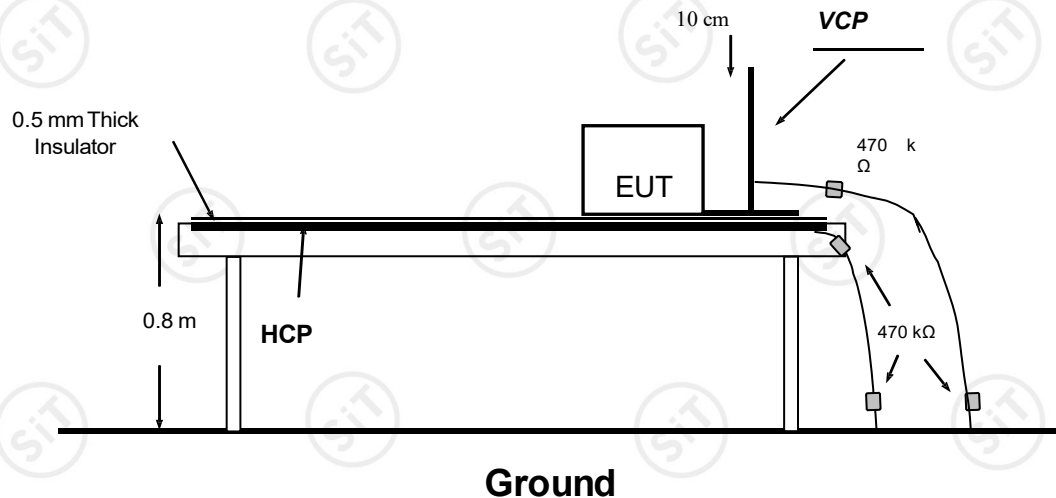

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.5 by 1.0-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

9.2. Test Procedure

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-2: 2009

Test level 3 for Air Discharge at ± 8 kV

Test level 2 for Contact Discharge at ± 4 kV

9.2.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

9.2.2. Contact Discharge

All the procedure shall be same as Section 9.2.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

9.2.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

9.2.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.3. Test Data

N/A

Electrostatic Discharge Test Results

Standard	☐ IEC 61000-4-2 ☒ EN 61000-4-2		
Applicant	Mid Ocean Brands B.V.		
EUT	Bamboo wireless charge stand	Temperature	23 °C
M/N	MO9692	Humidity	44 %
Criterion	B	Pressure	1021mbar
Test Mode	N/A	Test Date	November 03, 2025
Test Engineer	N/A		


TEST RESULT OF TM1-TM2

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	/
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	/
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	/
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	/

Note: The EUT is powered by DC , so this item is not applicable.

10. ELECTRICAL FAST TRANSIENT IMMUNITY

10.1. Test Configuration

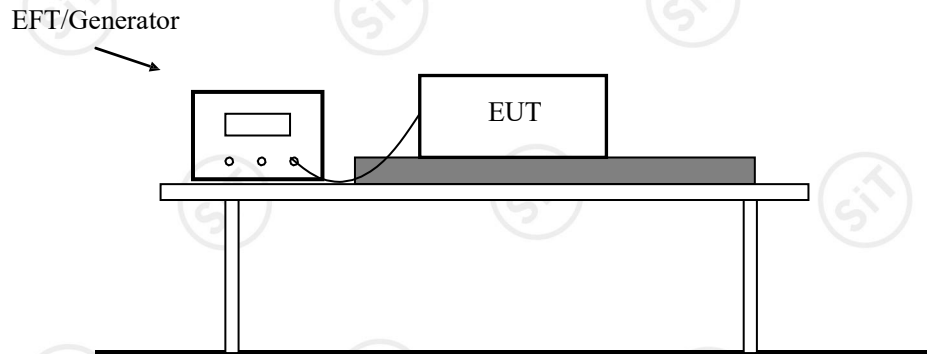

10.2. Test Standard

ETSI EN 301 489-1 V2.2.3/ EN61000-4-4: 2012
Test level 2 at 1 kV

Test level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Performance criterion: B

10.3. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

10.4.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

10.4.2. For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

10.4.3. For DC output line ports: It's unnecessary to test.

10.4. Test Data

N/A

Electrical Fast Transient/Burst Test Results

Standard	☐ IEC 61000-4-4 ☒ EN 61000-4-4		
Applicant	Mid Ocean Brands B.V.		
EUT	Bamboo wireless charge stand	Temperature	25℃
M/N	MO9692	Humidity	45%
Test Mode	N/A	Criterion	N/A
Test Engineer	N/A	Test Date	N/A


TEST RESULT OF TM1-TM2

Line	Test Voltage	Polarity	Result (Pass/Fail)
L	1KV	+/-	/
N	1KV	+/-	/
L-N	1KV	+/-	/

Note: The EUT is powered by DC , so this item is not applicable.

11. RF COMMON MODE

11.1. Test Configuration

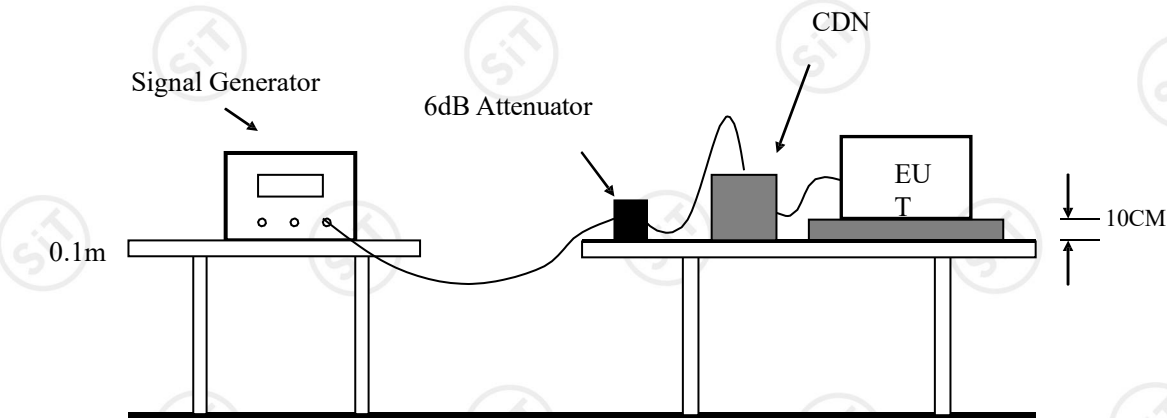

11.2. Test Standard

ETSI EN 301 489-1 V2.2.3/ EN IEC 61000-4-6:
2014+AC:2015
Test level 2 at 3 V (r.m.s.), 0.15 MHz ~ 80 MHz,
Modulation type: AM
Modulation depth: 80%
Modulation signal: 1 kHz

Test level

Level	Voltage Level (r.m.s.) (V)
1	1
2	3
3	10
X	Special

Performance criterion: A

11.3. Test Procedure

11.3.1. Let the EUT work in test mode and test it.

11.3.2. The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

11.3.3. The disturbance signal described below is injected to EUT through CDN.

11.3.4. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

11.3.5. The frequency range is swept from 150 kHz to 80 MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

11.3.6. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

11.3.7. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

11.4. Test Data

N/A

Injected Currents Susceptibility Test Results

Standard	☐ IEC 61000-4-6 ☒ EN IEC 61000-4-6		
Applicant	Mid Ocean Brands B.V.		
EUT	Bamboo wireless charge stand	Temperature	24.2℃
M/N	MO9692	Humidity	44.7%
Test Mode	N/A	Criterion	N/A
Test Engineer	N/A	Test Date	N/A


TEST RESULT OF TM1-TM2

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result (Pass/Fail)
0.15 ~ 80	AC Mains	3V	/

Note: The EUT is powered by DC , so this item is not applicable.

12. SURGES, LINE TO LINE AND LINE TO GROUND

12.1. Test Configuration

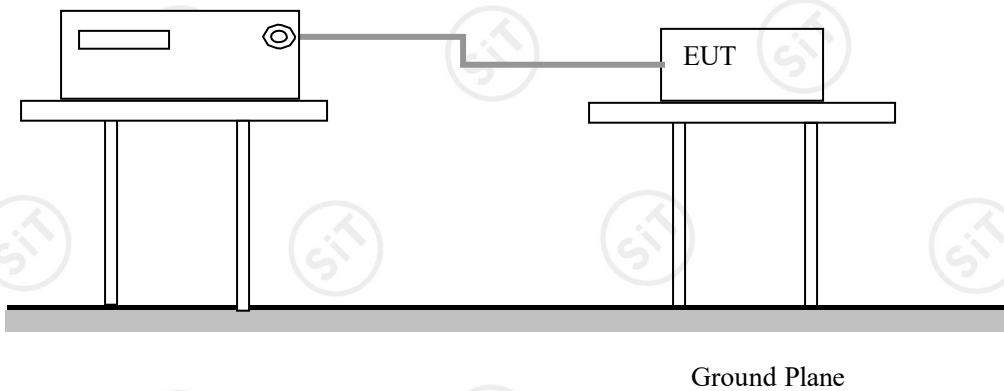

12.2. Test Standard

ETSI EN 301 489-1 V2.2.3 / EN 61000-4-5: 2014

L-N: Test level 2 at 1 kV

L-PE, N-PE Test Level 3 at 2kV

Test Level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Performance criterion: B

12.3. Test Procedure

- 12.3.1. For line to line coupling mode, provide a 0.5 kV 1.2/50us voltage surge (at open-circuit condition).
- 12.3.2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 12.3.3. Different phase angles are done individually.
- 12.3.4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.4. Test Data


Surge Immunity Test Result			
Standard	☐ IEC 61000-4-5 ☒ EN 61000-4-5		
Applicant	Mid Ocean Brands B.V.		
EUT	Bamboo wireless charge stand	Temperature	25℃
M/N	MO9692	Humidity	45%
Test Mode	N/A	Criterion	N/A
Test Engineer	N/A	Test Date	N/A

TEST RESULT OF TM1-TM2					
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	/
	-	0°, 90°, 180°, 270°	5	1.0	/

Note: The EUT is powered by DC , so this item is not applicable.

13. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST

13.1. Test Configuration

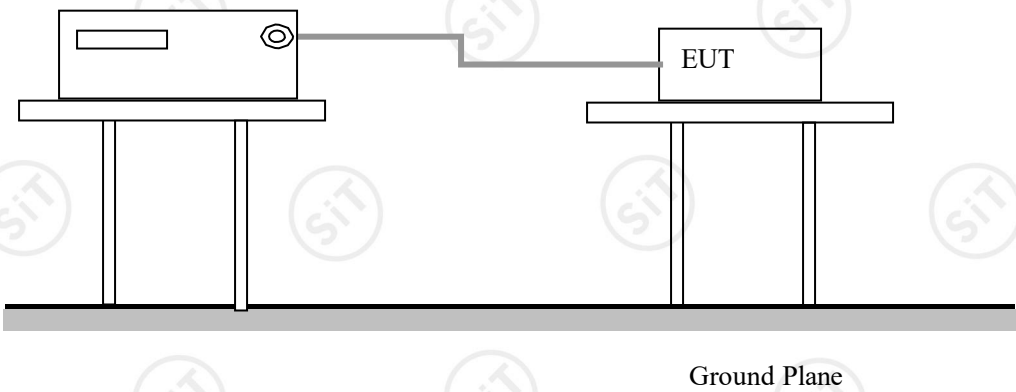

13.2. Test Standard

ETSI EN 301 489-1 V2.2.3/ EN IEC 61000-4-11: 2020
Test levels and Performance Criterion

Test Level

Voltage Reduction %UT	Voltage dips %UT	Duration (in period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction %UT	Voltage Interruptions %UT	Duration (in period)
100	0	250

Performance criterion: B&C

13.3. Test Procedure

- 13.3.1. The interruption is introduced at selected phase angles with specified duration.
- 13.3.2. Record any degradation of performance.

13.4. Test Data

Voltage Dips And Interruptions Test Results			
Standard	☐ IEC 61000-4-11 ☒ EN IEC 61000-4-11		
Applicant	Mid Ocean Brands B.V.		
EUT	Bamboo wireless charge stand	Temperature	25°C
M/N	MO9692	Humidity	45%
Test Mode	N/A	Criterion	N/A
Test Engineer	N/A	Test Date	N/A

TEST RESULT OF TM1-TM2			
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Result (Pass/Fail)
0	100	0.5P	/
0	100	1P	/
70	30	25P	/
0	100	250P	/

Note: The EUT is powered by DC , so this item is not applicable.

14. LIST OF MEASURING EQUIPMENT

Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025-06-18	2026-06-17
10dB Attenuator	SCHWARZBECK	OSPAM236	9729	2025-06-18	2026-06-17
Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2025-06-18	2026-06-17
EMI Test Software	AUDIX	E3	N/A	2025-06-18	2026-06-17
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025-06-18	2026-06-17
Absorbing clamp	ROHDE & SCHWARZ	MDS 21	4033	2025-06-18	2026-06-17
EMI Test Software	AUDIX	E3	N/A	2025-06-18	2026-06-17
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025-06-18	2026-06-17
Triple-loop Antenna	EVERFINE	LLA-2	11050003	2025-06-18	2026-06-17
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2025-06-18	2026-06-17
EMI Test Software	AUDIX	E3	N/A	2025-06-18	2026-06-17
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2025-06-18	2026-06-17
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2025-06-18	2026-06-17
Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2025-06-18	2026-06-17
EMI Test Software	AUDIX	E3	N/A	2025-06-18	2026-06-17
Positioning Controller	MF	MF-7082	/	2025-06-18	2026-06-17
Power Analyzer Test System	Voltech	PM6000	20000670053	2025-06-18	2026-06-17
ESD Simulator	KIKUSUI	KC001311	KES4021	2025-06-03	2026-06-02
SIGNAL GENERATOR	R&S	SMB100A	105942	2025-06-14	2026-06-13
RF Power Amplifier	BONN Elektronik	BLWA0830-160/100/40D	128740	2025-06-14	2026-06-13
Log-periodic Antenna	SCHWARZBECK	STLP9128D	043	2025-06-14	2026-06-13
Power Meter	R&S	102031	16829	2025-06-14	2026-06-13
Electrical fast transient(EFT)generator	3CTEST	EFT-4021	EC0461044	2025-06-18	2026-06-17
Coupling Clamp	3CTEST	EFTC	EC0442098	2025-06-18	2026-06-17
Surge test system	3CTEST	SG5006G	EC5581070	2025-06-18	2026-06-17
Coupling/decoupling network	3CTEST	SGN-5010G	CS5591033	2025-06-18	2026-06-17
Simu lator	FRA NKONIA	CIT-10	A126MO9692	2025-06-18	2026-06-17
CDN	FRA NKONIA	CDN-M2	5100100100	2025-06-18	2026-06-17
CDN	FRA NKONIA	CDN-M3	0900-11	2025-06-18	2026-06-17
Attenuator	FRA NKONIA	ATT6	0010222A	2025-06-18	2026-06-17
Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2025-06-18	2026-06-17

15. PHOTOGRAPHS OF TEST SETUP

Photo of Radiated Emissions Measurement




16. EXTERNAL AND INTERNAL PHOTOS OF THE EUT


Appearance photograph of EUT



Appearance photograph of EUT

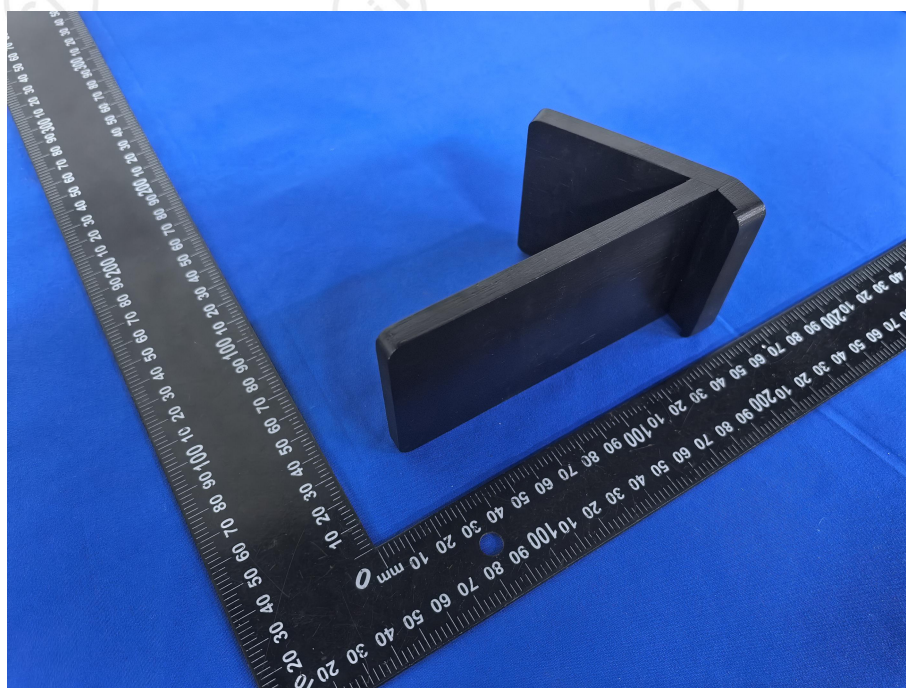


Appearance photograph of EUT

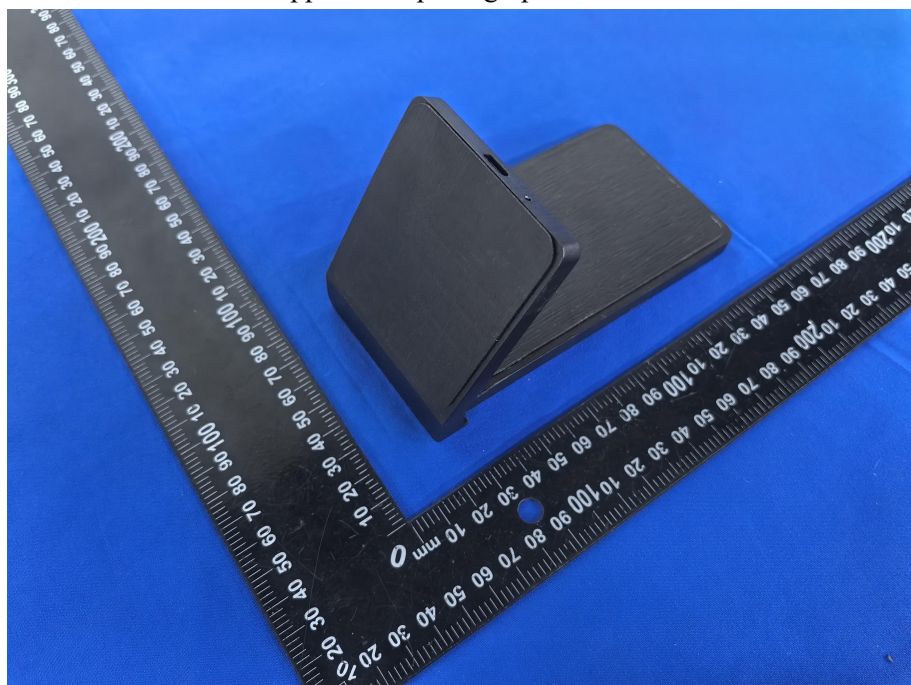


Appearance photograph of EUT




Appearance photograph of EUT

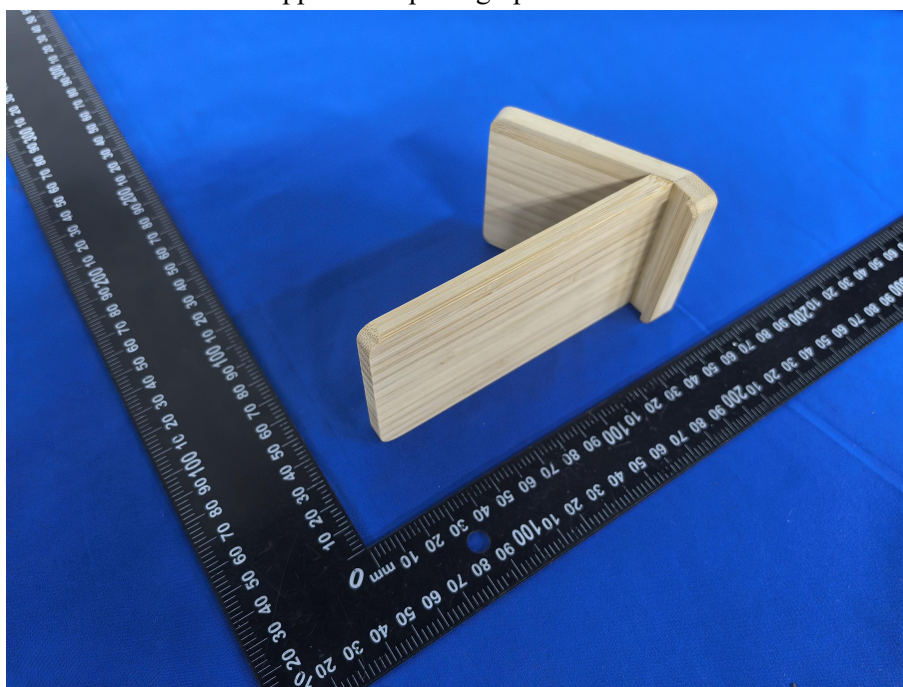


Appearance photograph of EUT

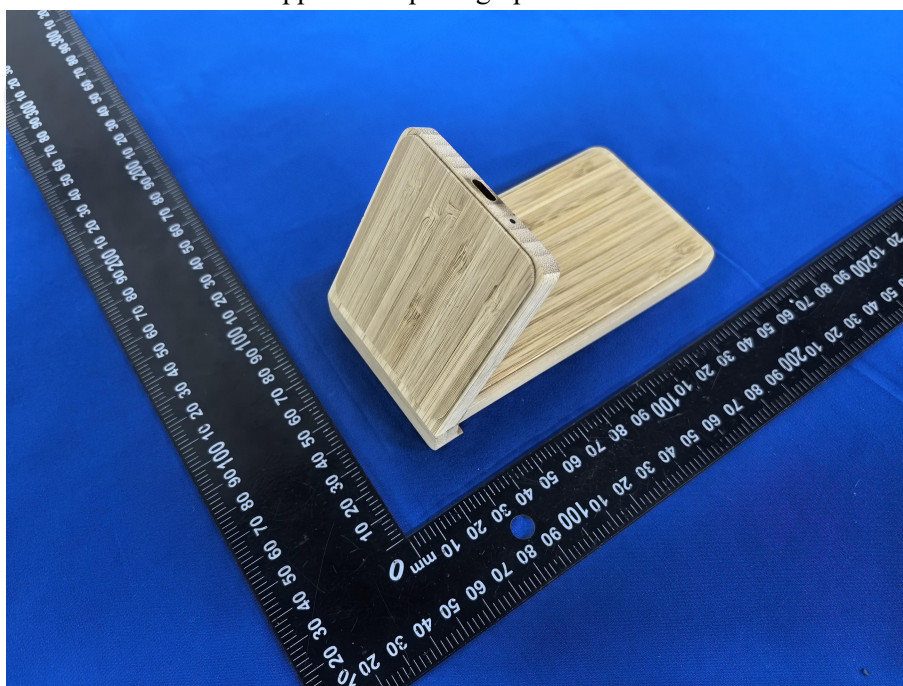


Appearance photograph of EUT

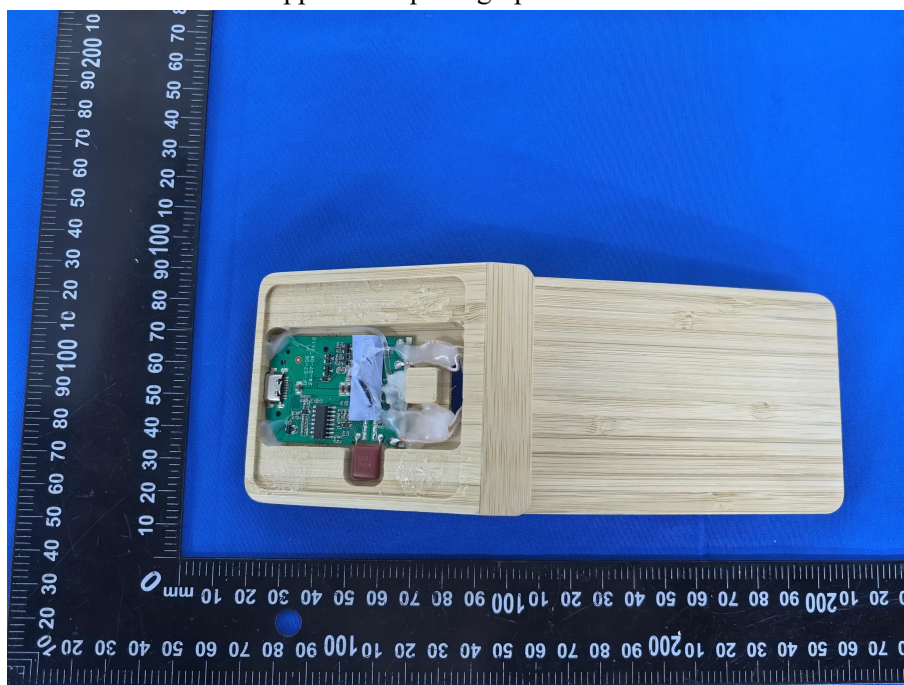


Appearance photograph of EUT

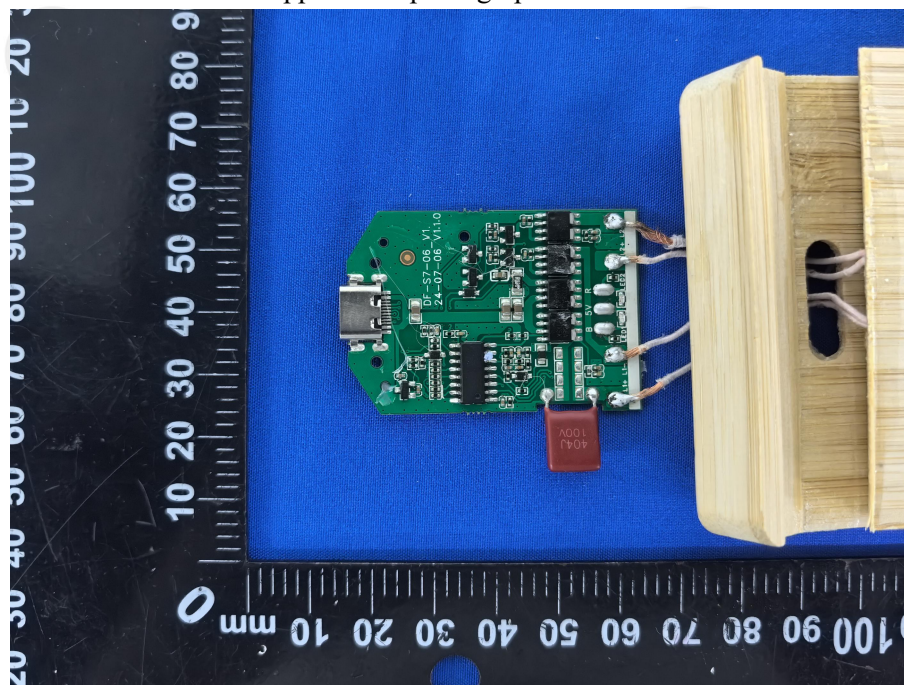

Appearance photograph of EUT

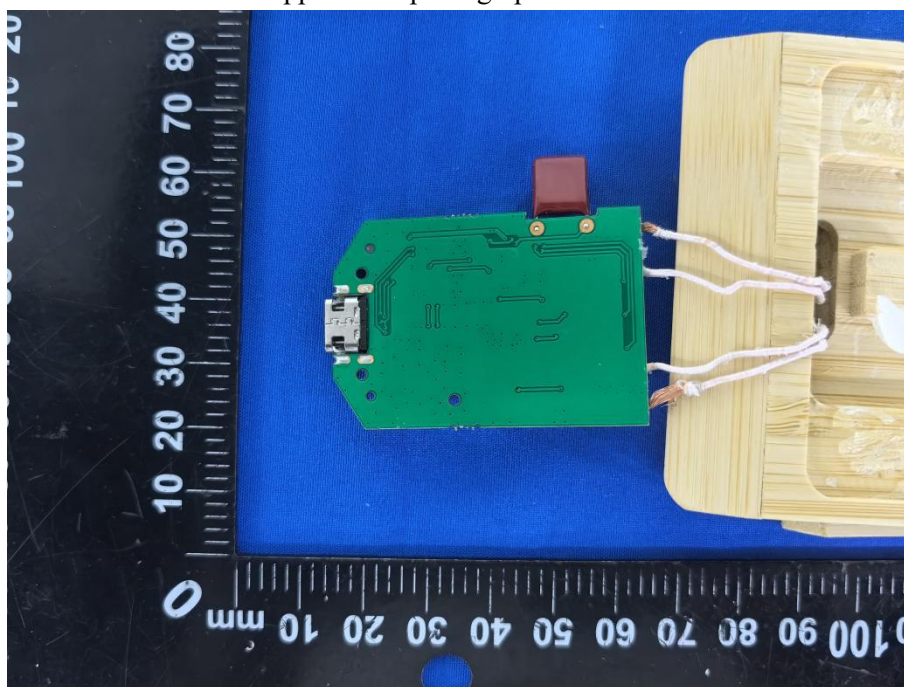

Appearance photograph of EUT

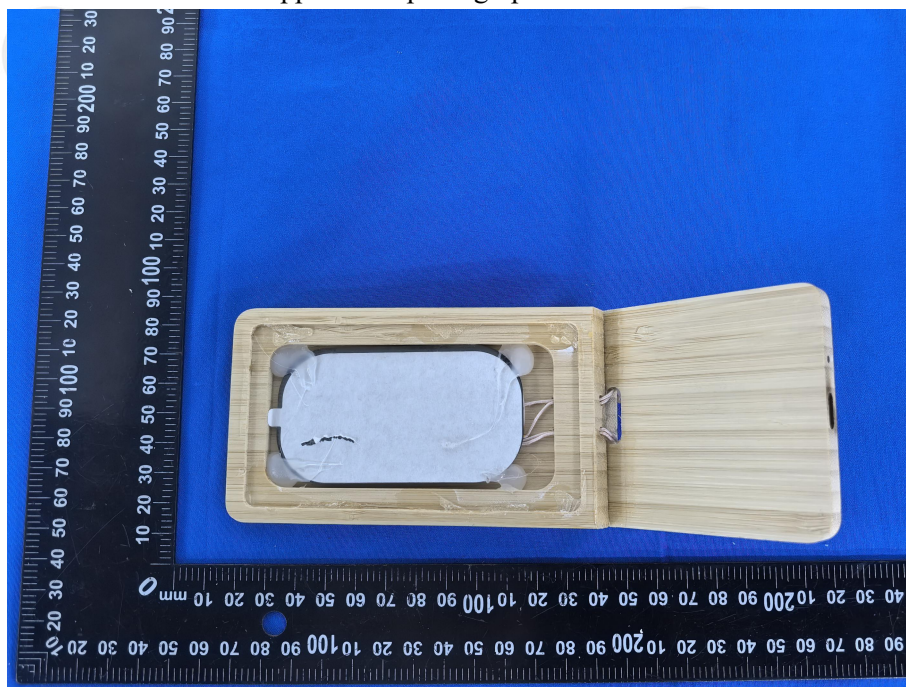

-----THE END OF REPORT-----