



TEST REPORT

Reference No...... : WTF22F05100001W
Applicant..... : Mid Ocean Brands B.V.
Address..... : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer : 111590
Product Name..... : Weatherstation
Model No..... : MO6664
Test specification..... : ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.1.1 (2019-03)
ETSI EN 301 489-17 V3.2.4 (2020-09)
Date of Receipt sample : 2022-05-26
Date of Test : 2022-05-27 to 2022-07-25
Date of Issue..... : 2022-08-02
Test Report Form No. : WEW-301489A-01A
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Approved by:

Roy Hong

Danny Zhou



1 Test Summary

Emission				
Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emissions	ETSI EN 301 489-3 V2.1.1 ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 55032	Table A.10 of EN 55032	Pass
Radiation Emission		ETSI EN 301 489-1 V2.2.3 EN 55032	Table A.4 and Table A.5 of EN 55032	Pass
Harmonic Current Emissions		ETSI EN 301 489-1 V2.2.3 EN 61000-3-2	Clause 7 of EN 61000-3-2	Pass**
Voltage Fluctuations and Flicker		ETSI EN 301 489-1 V2.2.3 EN 61000-3-3	Clause 5 of EN 61000-3-3	Pass
Immunity				
Test	Test Requirement	Test Method	Class / Severity	Result
Electrostatic Discharge (ESD)	ETSI EN 301 489-3 V2.1.1 ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-2	$\pm 2/\pm 4$ kV Contact $\pm 2/\pm 4/\pm 8$ kV Air	Pass
Radio frequency electromagnetic field (80 MHz to 6 000MHz)		ETSI EN 301 489-1 V2.2.3 EN 61000-4-3	3V/m, 80%, 1kHz, Amp. Mod.	Pass
Fast Transients Common Mode (EFT)		ETSI EN 301 489-1 V2.2.3 EN 61000-4-4	AC $\pm 0.5/1.0$ kV	Pass
Surge		ETSI EN 301 489-1 V2.2.3 EN 61000-4-5	± 1 kV D.M.† ± 2 kV C.M.‡	Pass
RF common mode 0,15 MHz to 80 MHz (CS)		ETSI EN 301 489-1 V2.2.3 EN 61000-4-6	3Vrms(emf), 80%, 1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions		ETSI EN 301 489-1 V2.2.3 EN 61000-4-11	0 % UT* for 0.5per 0 % UT* for 1per 70 % UT* for 25per 0 % UT* for 250per	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

A.M Amplitude Modulation

† Differential Mode

‡ Common Mode

* U_T is the nominal supply voltage

** According to EN 61000-3-2 which states: "For the following categories of equipment limits are not specified in this edition of the standard. Equipment with a rated power of 75W or less, other than lighting equipment" Therefore there is no need for harmonics test to be performed on this product and deemed to fulfil emission requirements without testing.



2 Contents

	Page
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	4
3.1 GENERAL DESCRIPTION OF E.U.T.	4
3.2 DETAILS OF E.U.T.	4
3.3 DESCRIPTION OF SUPPORT UNITS	4
3.4 STANDARDS APPLICABLE FOR TESTING	4
3.5 TEST FACILITY.....	5
3.6 SUBCONTRACTED.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4 EQUIPMENT USED DURING TEST	6
4.1 EQUIPMENT LIST.....	6
4.2 SOFTWARE LIST.....	8
4.3 MEASUREMENT UNCERTAINTY	8
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.5 DECISION RULE	9
5 EMC REQUIREMENTS FOR EMISSIONS	10
5.1 CONDUCTED EMISSION	10
5.2 RADIATED EMISSION	13
5.3 VOLTAGE FLUCTUATION AND FLICKER	19
6 EMC REQUIREMENT FOR IMMUNITY	21
6.1 PERFORMANCE CRITERIA	21
6.2 ELECTROSTATIC DISCHARGE(ESD).....	22
6.3 RF ELECTROMAGNETIC FIELD (80MHZ TO 6 000MHZ) (RS).....	24
6.4 FAST TRANSIENTS COMMON MODE (EFT)	26
6.5 SURGES	28
6.6 RF COMMON MODE 0,15 MHZ TO 80MHZ (CS).....	30
6.7 VOLTAGE DIPS AND INTERRUPTIONS	32
7 PHOTOGRAPHS - TEST SETUP	33
7.1 PHOTOGRAPH - RADIATED EMISSIONS TEST SETUP.....	33
7.2 PHOTOGRAPH - CONDUCTED EMISSIONS TEST SETUP.....	34
7.3 PHOTOGRAPH – VOLTAGE FLUCTUATIONS TEST SETUP	34
7.4 PHOTOGRAPH - RF ELECTROMAGNETIC FIELD TEST SETUP	35
7.5 PHOTOGRAPH - ESD TEST SETUP.....	35
7.6 PHOTOGRAPH - EFT IMMUNITY TEST SETUP.....	36
7.7 PHOTOGRAPH - SURGE IMMUNITY TEST SETUP	36
7.8 PHOTOGRAPH - RADIO-FREQUENCY COMMON MODE TEST SETUP	37
7.9 PHOTOGRAPH - VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP	37
8 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	38
8.1 EUT – EXTERNAL PHOTOS	38
8.2 EUT – INTERNAL PHOTOS	46



3 General Information

3.1 General Description of E.U.T.

Product Name : Weatherstation

Model No. : MO6664

Remark : ---

3.2 Details of E.U.T.

Technical Data : **Outdoor Unit:** Battery 3V (2*1.5V AAA)

Indoor Unit:

Battery 4.5V (3*1.5V AAA)

Adapter Input: 100-240V~, 50/60Hz, 0.3A Max

Adapter Output: DC 5V, 1.2A, 6.0W

3.3 Description of Support Units

The EUT has been tested as an independent unit. MO6664 is the test sample. The DV and RE tests were performed in the condition of AC 240V/50Hz input. The other tests were performed in the condition of AC 230V/50Hz input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

ETSI EN 301 489-1 V2.2.3 (2019-11)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-3 V2.1.1 (2019-03)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU
ETSI EN 301 489-17 V3.2.4 (2020-09)	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

4.1 Equipment List

<input type="checkbox"/> Mains Terminal Disturbance Voltage 1#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2022-01-06	2023-01-05
2.	LISN	R&S	ENV216	101343	2022-01-06	2023-01-05
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2022-01-06	2023-01-05
4.	Switch	CD	RSU-A4 18G	RSUA4008	2022-01-06	2023-01-05
<input checked="" type="checkbox"/> Mains Terminal Disturbance Voltage 2#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2022-01-06	2023-01-05
2.	LISN	R&S	ENV216	101215	2022-01-06	2023-01-05
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2022-01-06	2023-01-05
4.	Switch	ESE	RSU/M2	---	2022-01-07	2023-01-06
<input type="checkbox"/> Mains Terminal Disturbance Voltage 3#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2022-01-06	2023-01-05
2.	LISN	R&S	ENV216	101542	2022-01-06	2023-01-05
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2022-01-07	2023-01-06
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2022-01-07	2023-01-06
<input checked="" type="checkbox"/> Radiated Emission (30MHz to 1GHz) 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2021-01-12	2024-01-11
2.	EMI Test Receiver	R&S	ESR7	101566	2022-01-07	2023-01-06
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2022-01-09	2023-01-08
4.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3m	214NN320	2022-01-07	2023-01-06
<input type="checkbox"/> Radiated Emission (30MHz to 1GHz) 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	YIHENG	10m×5.3m×3.5m	YH2021071804	2021-07-18	2024-07-17
2.	EMI Test Receiver	R&S	ESR7	102454	2022-01-07	2023-01-06
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	2022-01-09	2023-01-08
4.	Coaxial Cable (below 1GHz)	Times-Microwave Systems	LMR240UF-NMSM-7.5	-	2022-01-07	2023-01-06



<input checked="" type="checkbox"/> Radiated Emission (1GHz to 6GHz) 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2021-01-12	2024-01-11
2.	EMI Test Receiver	R&S	ESR7	101566	2022-01-07	2023-01-06
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2022-01-09	2023-01-08
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2022-01-06	2023-01-05
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	2022-01-06	2023-01-05
<input type="checkbox"/> Radiated Emission (1GHz to 6GHz) 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	YIHENG	10m×5.3m×3.5m	YH2021071804	2021-07-18	2024-07-17
2.	EMI Test Receiver	R&S	ESR7	102454	2022-01-07	2023-01-06
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA9120D	02465	2022-01-09	2023-01-08
4.	Coaxial Cable (above 1GHz)	Times-Microwave Systems	SFT205-NMSM-7	-	2022-01-06	2023-01-05
5.	Preamplifier	Tonscend	TAP0118045	AP21J806168	2022-01-06	2023-01-05
<input checked="" type="checkbox"/> Harmonics and Flicker Measuring System						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Harmonics and Flicker Measuring System	TESEQ	CCN1000-1	1133A01498	2022-01-06	2023-01-05
<input checked="" type="checkbox"/> ESD						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	ESD Simulator	TESEQ	NSG437	521	2022-02-12	2023-02-11
<input checked="" type="checkbox"/> EFT & Voltage Dips and Interruptions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMS test system	TESEQ	NSG3040	1858	2022-01-06	2023-01-05
<input checked="" type="checkbox"/> Surge						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Surge Simulator	TESEQ	NSG3060	1395	2022-01-06	2023-01-05
<input checked="" type="checkbox"/> Injected Currents						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Conducted Immunity test system	TESEQ	NSG4070	31469	2021-09-18	2022-09-17
2.	CDN	TESEQ	CDN M016	31586	2022-01-06	2023-01-05
3.	6dB Attenuator	TESEQ	ATN6075	32122	2022-01-06	2023-01-05



<input checked="" type="checkbox"/> Radio-frequency electromagnetic fields						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	2022-01-06	2023-01-05
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	2022-01-06	2023-01-05
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	2022-01-10	2023-01-09
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	2022-01-09	2023-01-08
5.	RF signal generator	Agilent	N5181A	MY48180720	2022-01-06	2023-01-05
6.	Power meter	RS	NRP6A	101133	2022-01-06	2023-01-05
7.	Power meter	RS	NRP6A	101134	2022-01-06	2023-01-05

: Not Used

: Used

4.2 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Harmonics and Flicker Test Software	TESEQ	Win2100	V4.28
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

4.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emission	150kHz~30MHz	±3.2dB	(1)
Radiated Emission	30MHz~1GHz	±4.1dB	(1)
Radiated Emission	1GHz~6GHz	±5.0dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



4.4 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

4.5 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit.

WALTEK



5 EMC Requirements for Emissions

5.1 Conducted Emission

Test Requirement	: ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 55032 Class B
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B/ Table A.10 of EN 55032
Ports	: AC Mains
Detector	: Peak for pre-scan (9kHz Resolution Bandwidth)

5.1.1 E.U.T. Operation

Operating Environment:


Temperature	: 24.8°C
Humidity	: 49.3%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: AC 240V/50Hz
Operating Mode	: Communication mode

5.1.2 Test Setup

The conducted emission tests were performed using the setup accordance with the EN 55032.

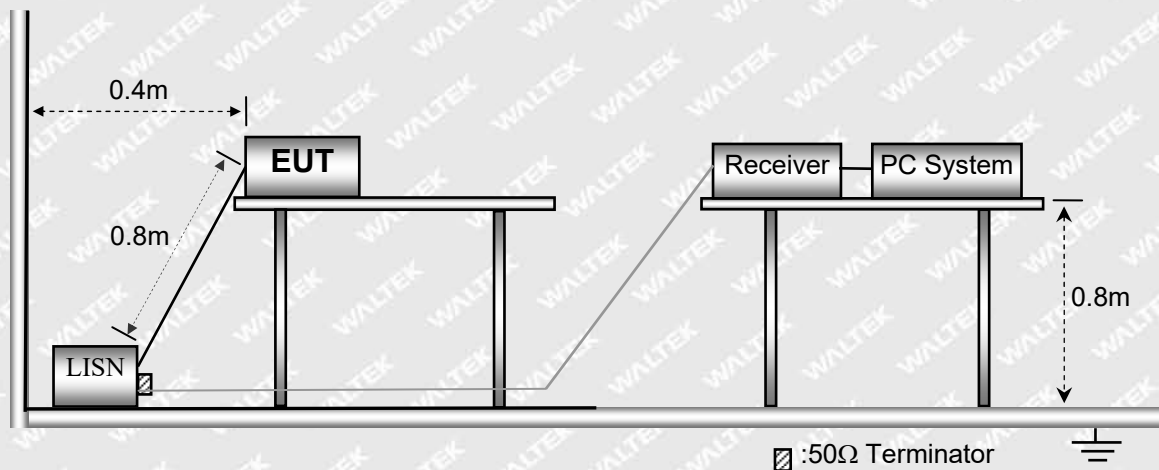



5.1.3 Corrected Amplitude & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$


$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Measurement} - \text{Limit}$$

5.1.4 Test Result


Live Line :

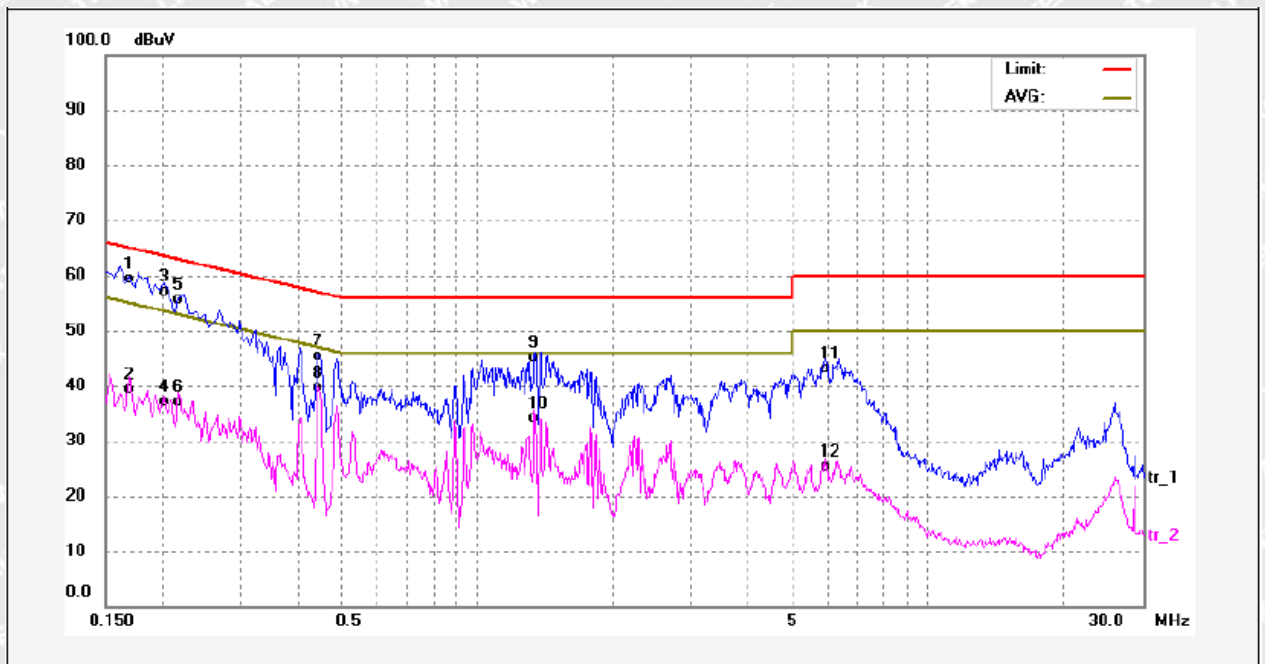

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1712	48.61	9.65	58.26	64.90	-6.64	QP	
2	0.1712	28.80	9.65	38.45	54.90	-16.45	AVG	
3	0.2020	46.59	9.66	56.25	63.52	-7.27	QP	
4	0.2020	26.49	9.66	36.15	53.52	-17.37	AVG	
5	0.2180	44.90	9.66	54.56	62.89	-8.33	QP	
6	0.2180	26.54	9.66	36.20	52.89	-16.69	AVG	
7	0.4460	34.63	9.68	44.31	56.95	-12.64	QP	
8	0.4460	28.98	9.68	38.66	46.95	-8.29	AVG	
9	1.3500	34.51	9.72	44.23	56.00	-11.77	QP	
10	1.3500	23.48	9.72	33.20	46.00	-12.80	AVG	
11	5.9420	32.32	9.87	42.19	60.00	-17.81	QP	
12	5.9420	14.48	9.87	24.35	50.00	-25.65	AVG	



Neutral Line :

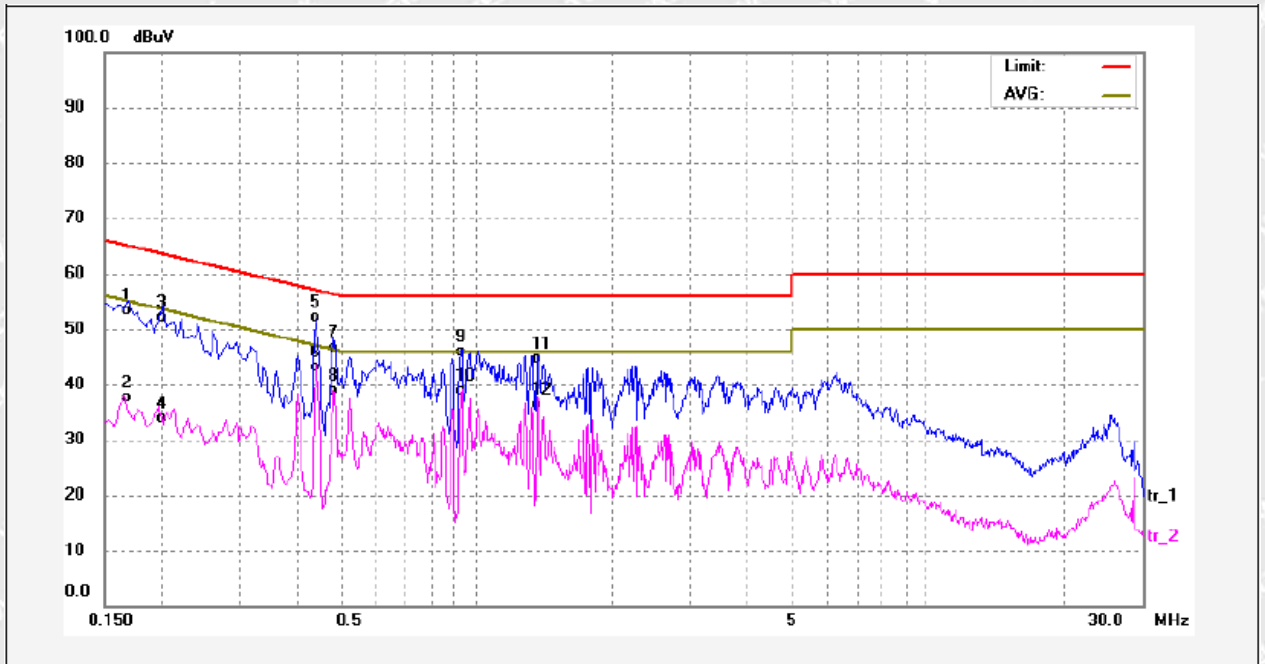

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	42.71	9.65	52.36	64.96	-12.60	QP	
2	0.1700	26.94	9.65	36.59	54.96	-18.37	AVG	
3	0.2020	41.58	9.66	51.24	63.52	-12.28	QP	
4	0.2020	23.10	9.66	32.76	53.52	-20.76	AVG	
5	0.4420	41.50	9.68	51.18	57.02	-5.84	QP	
6	0.4420	32.47	9.68	42.15	47.02	-4.87	AVG	
7	0.4860	35.92	9.70	45.62	56.24	-10.62	QP	
8	0.4860	28.18	9.70	37.88	46.24	-8.36	AVG	
9	0.9260	35.29	9.70	44.99	56.00	-11.01	QP	
10	0.9260	28.17	9.70	37.87	46.00	-8.13	AVG	
11	1.3740	33.81	9.75	43.56	56.00	-12.44	QP	
12	1.3740	25.51	9.75	35.26	46.00	-10.74	AVG	



5.2 Radiated Emission

Test Requirement	ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	ETSI EN 301 489-1, EN 55032, Class B
Frequency Range	30MHz to 1GHz, 1GHz to 6GHz
Class/Severity	Class B/ Table A.4 and A.5 of EN 55032
Detector	Peak for pre-scan (120kHz Resolution Bandwidth Below 1GHz; 1MHz Resolution Bandwidth Above 1GHz)

5.2.1 EUT Operation:

Operating Environment:

Temperature	21.5°C
Humidity	51.2%RH
Atmospheric Pressure	101.2kPa


EUT Operation:

Input Voltage	AC 240V/50Hz
Operating Mode	Communication mode

5.2.2 Test Setup


The radiated emission tests were performed using the setup accordance with the EN 55032.

Frequency Range: Below 1 GHz

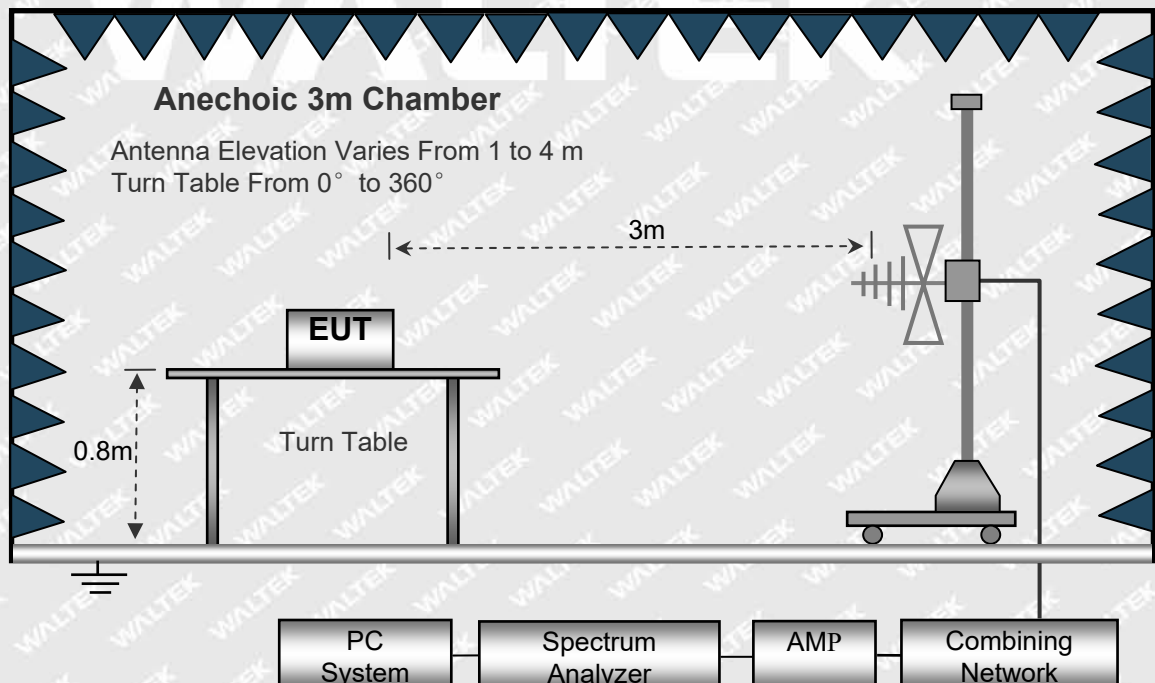



Frequency Range: Above 1 GHz

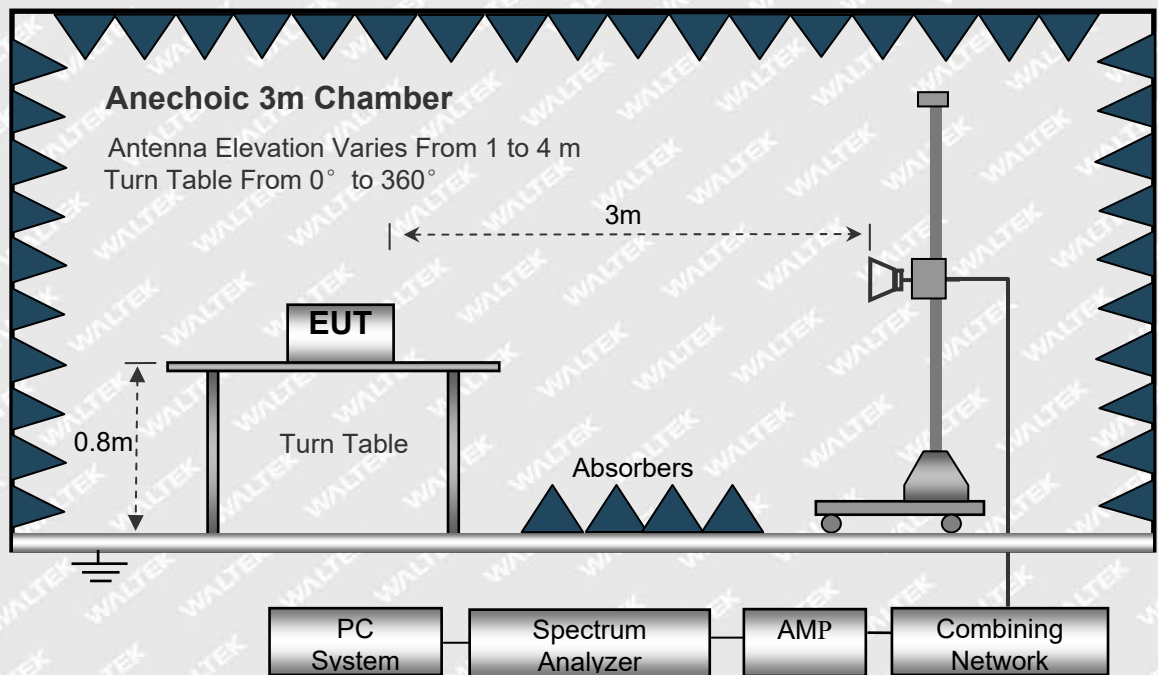

5.2.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



5.2.4 Test Result

Frequency Range: 30MHz ~ 1000MHz

Antenna Polarization: Vertical



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	36.1272	19.50	12.38	31.88	40.00	-8.12	QP	
2	37.7327	22.61	12.63	35.24	40.00	-4.76	QP	
3	45.5988	19.33	13.59	32.92	40.00	-7.08	QP	
4	119.4780	22.69	9.74	32.43	40.00	-7.57	QP	
5	211.4523	17.40	12.23	29.63	40.00	-10.37	QP	
6	220.7719	19.60	12.79	32.39	40.00	-7.61	QP	



Antenna Polarization: Horizontal




No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	117.5661	25.15	11.77	36.92	40.00	-3.08	QP	
2	185.7230	23.46	11.36	34.82	40.00	-5.18	QP	
3	217.8496	24.51	12.72	37.23	40.00	-2.77	QP	
4	223.8903	26.83	13.02	39.85	40.00	-0.15	QP	
5	257.7832	32.39	13.90	46.29	47.00	-0.71	QP	
6	263.9113	32.63	13.96	46.59	47.00	-0.41	QP	



Frequency Range: 1000MHz ~ 6000MHz


Antenna Polarization: Vertical

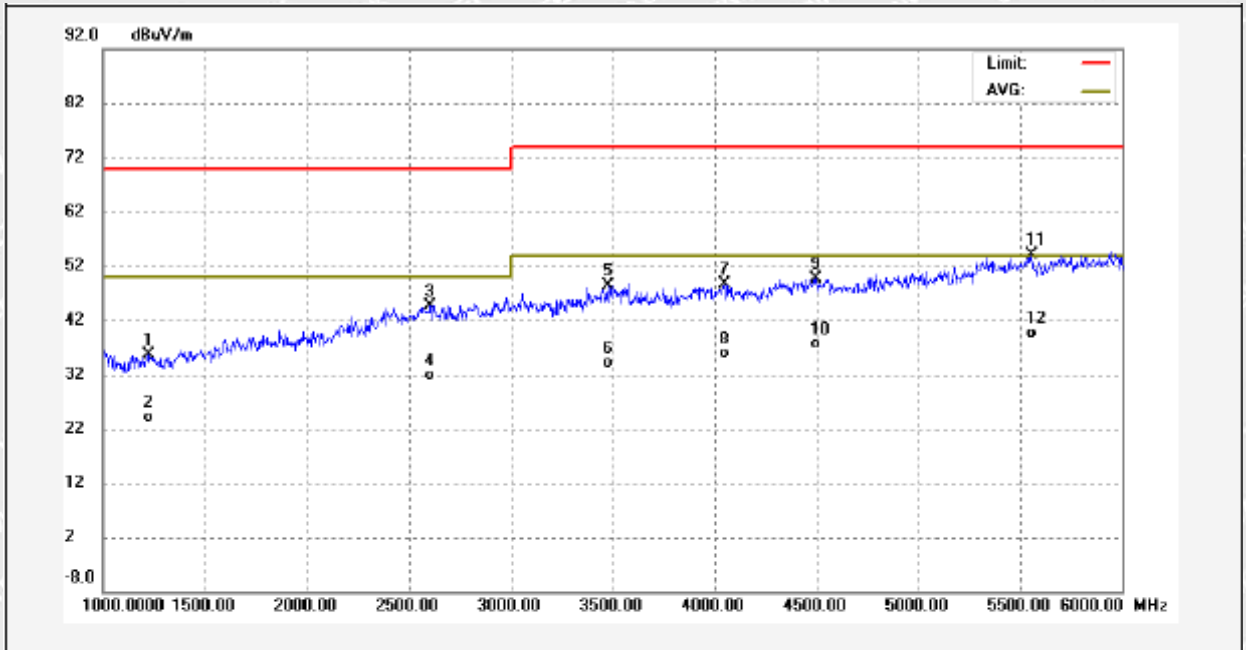

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1223.500	8.21	27.43	35.64	70.00	-34.36	peak	
2	1223.500	-3.39	27.43	24.04	50.00	-25.96	AVG	
3	2607.500	11.41	33.34	44.75	70.00	-25.25	peak	
4	2607.500	-1.57	33.34	31.77	50.00	-18.23	AVG	
5	3477.500	13.12	35.29	48.41	74.00	-25.59	peak	
6	3477.500	-1.15	35.29	34.14	54.00	-19.86	AVG	
7	4053.500	11.56	37.05	48.61	74.00	-25.39	peak	
8	4053.500	-1.11	37.05	35.94	54.00	-18.06	AVG	
9	4498.500	11.68	38.07	49.75	74.00	-24.25	peak	
10	4498.500	-0.49	38.07	37.58	54.00	-16.42	AVG	
11	5559.500	13.82	40.41	54.23	74.00	-19.77	peak	
12	5559.500	-0.81	40.41	39.60	54.00	-14.40	AVG	



Antenna Polarization: Horizontal

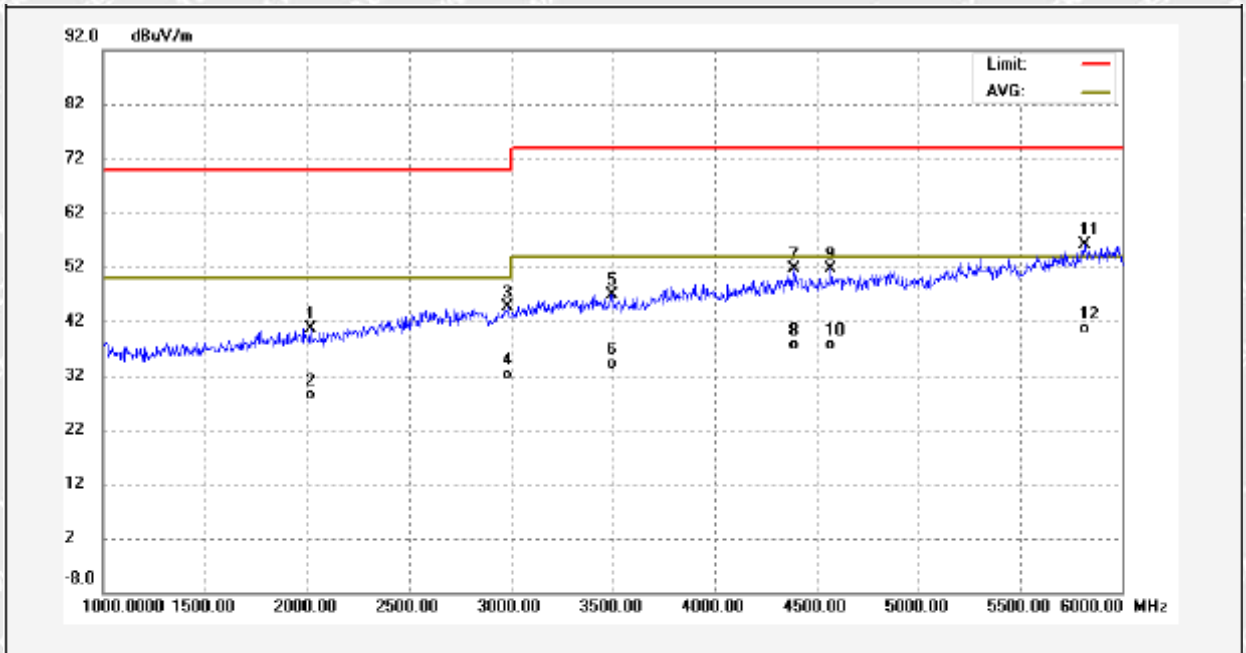

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2018.500	9.83	30.81	40.64	70.00	-29.36	peak	
2	2018.500	-2.47	30.81	28.34	50.00	-21.66	AVG	
3	2988.000	10.42	34.14	44.56	70.00	-25.44	peak	
4	2988.000	-1.89	34.14	32.25	50.00	-17.75	AVG	
5	3498.000	11.64	35.31	46.95	74.00	-27.05	peak	
6	3498.000	-1.13	35.31	34.18	54.00	-19.82	AVG	
7	4390.000	13.76	37.77	51.53	74.00	-22.47	peak	
8	4390.000	-0.21	37.77	37.56	54.00	-16.44	AVG	
9	4570.000	13.30	38.23	51.53	74.00	-22.47	peak	
10	4570.000	-0.55	38.23	37.68	54.00	-16.32	AVG	
11	5817.000	15.31	40.75	56.06	74.00	-17.94	peak	
12	5817.000	-0.02	40.75	40.73	54.00	-13.27	AVG	



5.3 Voltage Fluctuation and Flicker

Test Requirement : ETSI EN 301 489-3, ETSI EN 301 489-17

Test Method : ETSI EN 301 489-1, EN 61000-3-3

Test Result : Pass

5.3.1 E.U.T. Operation

Operating Environment:

Temperature : 23.5°C

Humidity : 47.2%RH

Atmospheric Pressure : 101.2kPa


EUT Operation:

Input Voltage : AC 230V/50Hz

Operating Mode : Communication mode

5.3.2 Block Diagram of Setup

The Voltage Fluctuation and Flicker test was performed in accordance with the EN 61000-3-3.

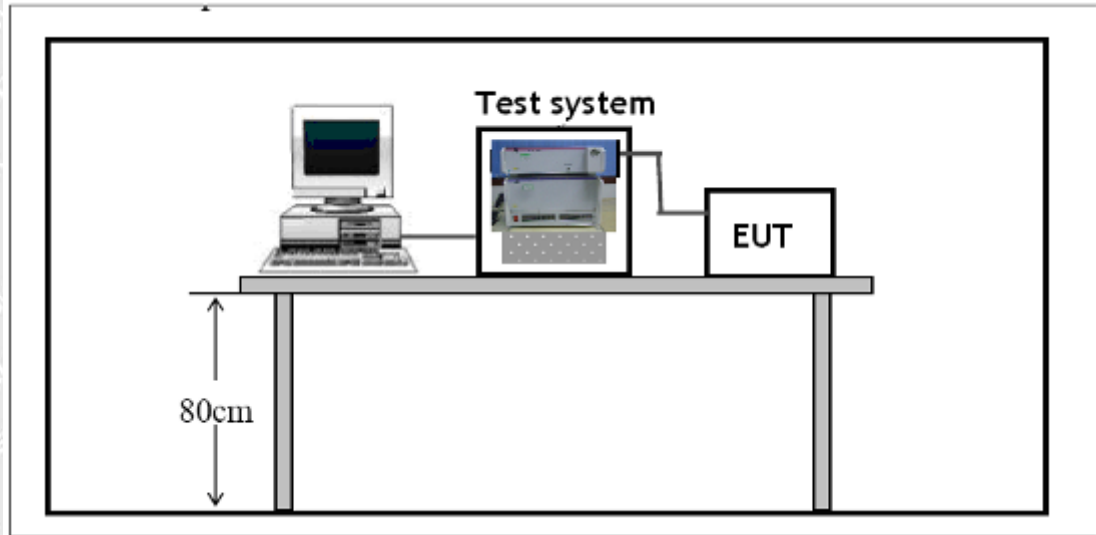



5.3.3 Voltage Fluctuation and Flicker Test Data

Flicker Test Summary per IEC61000-3-3:2013/AMD1:2017 (Run time)

EUT: Weatherstation MO6664

Tested by: Mirror

Test category: dt,dmax,dc and Pst (European limits)

Test Margin: 100

Test date: 2022/5/27

Start time: 8:57:13

End time: 9:07:40

Test duration (min): 10

Data file name: F-000331.cts_data

Comment: Communication mode

Customer:

Test Result: Pass

Status: Test Completed

Pst, and limit line

European Limits



Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.22

Highest dt (%):

0

Test limit (%):

Test limit (mS): 500.0

Pass

T-max (mS):

Test limit (%): 3.30

Pass

Highest dc (%):

0.00

Test limit (%): 4.00

Pass

Highest dmax (%):

0.00

Test limit:

1.000

Pass

Highest Pst (10 min. period): 0.064



6 EMC Requirement for Immunity

6.1 Performance Criteria

6.1.1 General performance criteria

The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;

6.1.2 Performance table

Criteria	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

WALTEK



6.2 Electrostatic Discharge(ESD)

Test Requirement	: ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 61000-4-2
Discharge Impedance	: 330 Ω / 150 pF
Discharge Voltage	: Air Discharge: +/-2,4,8 KV Contact Discharge: +/-2,4 KV HCP & VCP: +/-2,4 KV
Polarity	: Positive & Negative
Discharge Repeat Times	: At Least 20 times at each test point
Discharge Mode	: Single Discharge
Discharge Period	: 1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.5°C
Humidity	: 47.2%RH
Atmospheric Pressure	: 100.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: Communication mode

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the EN 61000-4-2.

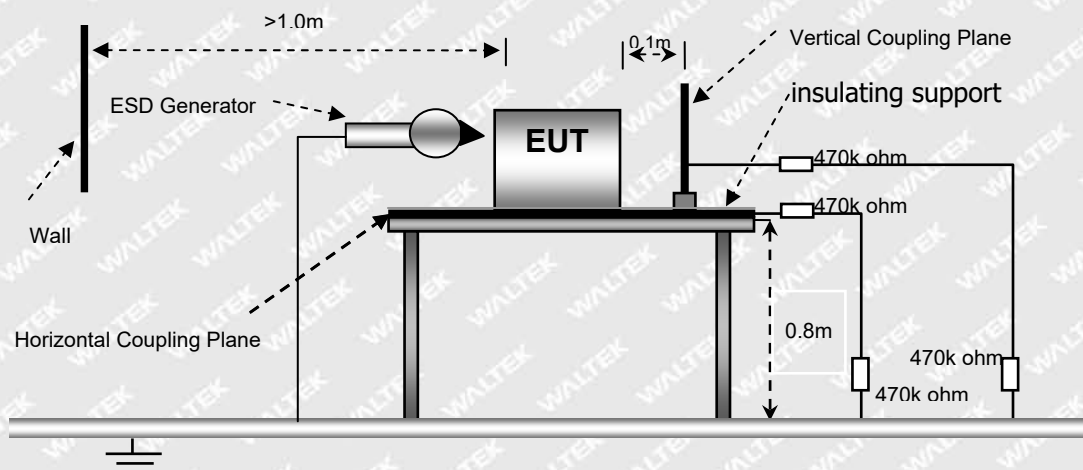



6.2.3 Test Result

Direct Discharge			Performance Criteria	
Discharge Level (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
$\pm 2 / \pm 4 / \pm 8$	B	1	N/A	Pass*
$\pm 2 / \pm 4$	B	2	Pass*	N/A

Remark:

Test points 1. All Exposed Surface & Seams; 2. All metallic part

* During the test no deviation was detected to the selected operation mode(s)

Indirect Discharge			Performance Criteria	
Discharge Level (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
$\pm 2 / \pm 4$	B	1	Pass*	Pass*

Remark:

Test points 1. All sides

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.3 RF Electromagnetic Field (80MHz to 6 000MHz) (RS)

Test Requirement	: ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 61000-4-3
Face of EUT	: Front, Back, Left, Right
Frequency Range	: 80MHz to 6 000MHz
Test Level	: 3V/m
Modulation	: 80%, 1kHz Amplitude Modulation.
Antenna polarisation	: Horizontal& Vertical

6.3.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.5°C
Humidity	: 47.2%RH
Atmospheric Pressure	: 100.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: Communication mode

6.3.2 Block Diagram of Setup

The Radiated Immunity test was performed in accordance with the EN 61000-4-3.

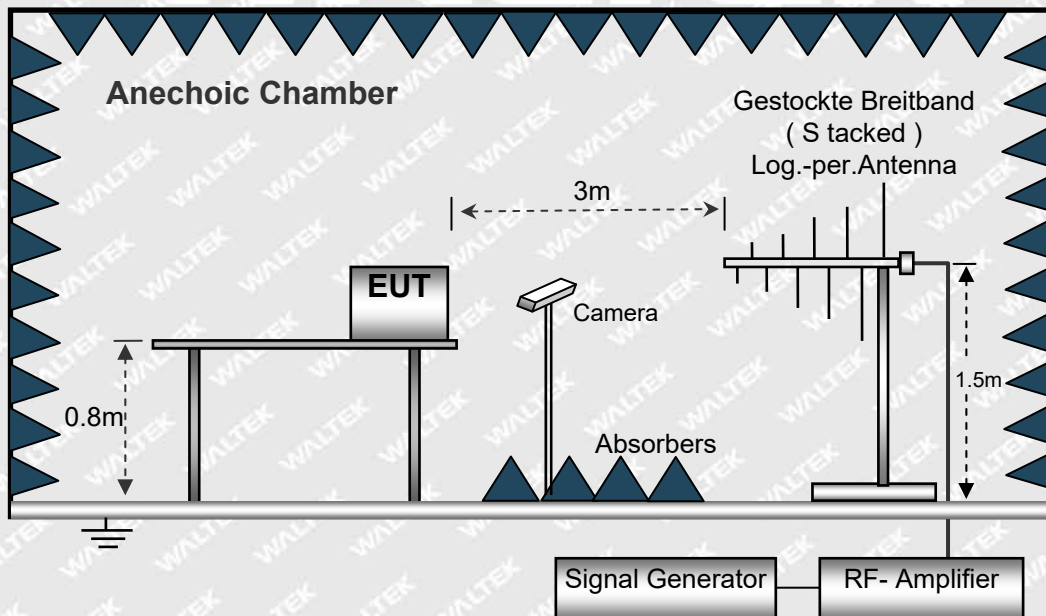



6.3.3 Test Result

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80MHz to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80MHz to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1000MHz to 6000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1000MHz to 6000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.4 Fast Transients Common Mode (EFT)

Test Requirement	: ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 61000-4-4
Polarity	: Positive & Negative
Repetition Frequency	: 5kHz
Burst Duration	: 300ms
Test Duration	: 2 minutes per level & polarity

6.4.1 E.U.T. Operation

Operating Environment:

Temperature	: 22.5°C
Humidity	: 47.2%RH
Atmospheric Pressure	: 100.2kPa


EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: Communication mode


6.4.2 Block Diagram of Test Setup

The Electrical Fast Transients Immunity test was performed in accordance with the EN 61000-4-4.

For AC Mains or DC Ports:

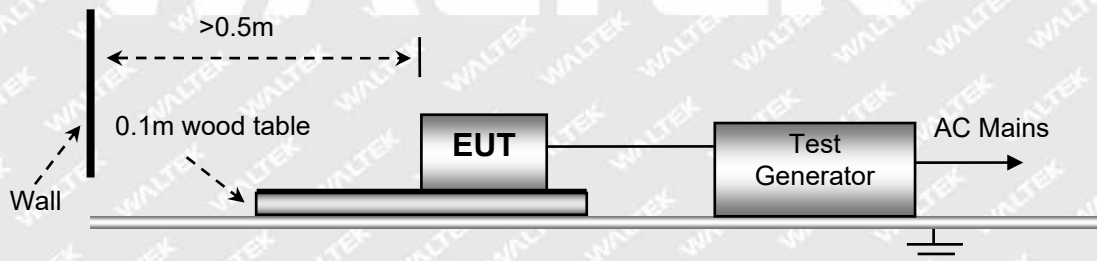

For Signal, Wired network or Control Ports:

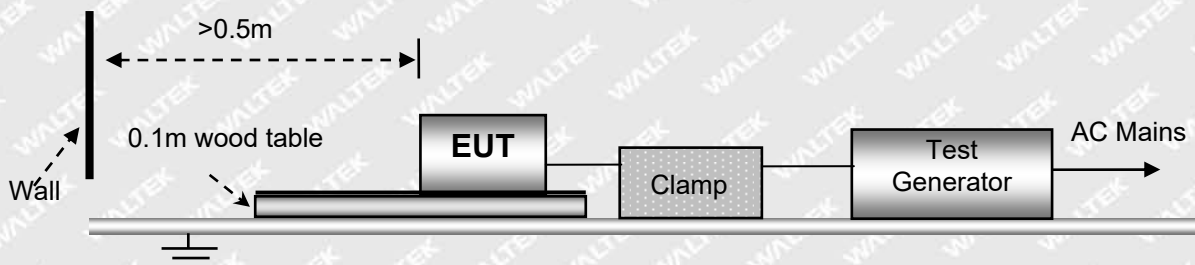



6.4.3 Test Result

Test Port	Test Level(kV)	Performance Criterion	Result
AC mains power port	±1.0	B	Pass*
DC power port	±0.5	B	N/A
Signal port	±0.5	B	N/A
Control port	±0.5	B	N/A
Wired network port	±0.5	B	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.5 Surges

Test Requirement	:	ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	:	ETSI EN 301 489-1, EN 61000-4-5
Interval	:	60s between each surge
No. of surges	:	5 positive, 5 negative at 0°, 90°, 180°, 270°.

6.5.1 E.U.T. Operation

Operating Environment:

Temperature	:	22.5°C
Humidity	:	47.2%RH
Atmospheric Pressure	:	100.2kPa


EUT Operation:

Input Voltage	:	AC 230V/50Hz
Operating Mode	:	Communication mode


6.5.2 Block Diagram of Test Setup

The Surges Immunity test was performed in accordance with the EN 61000-4-5.

For AC Mains or DC Ports:

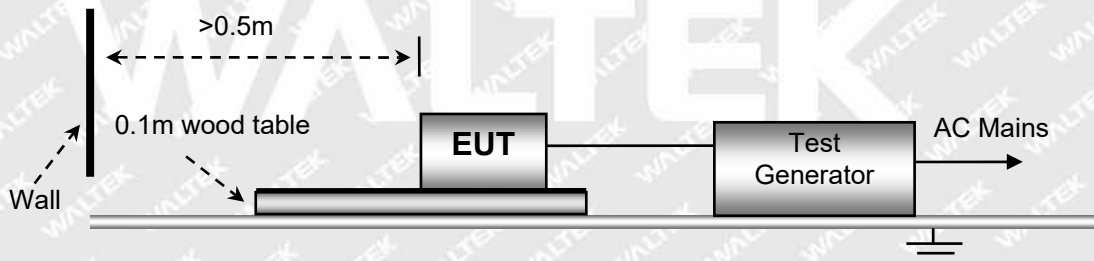

For Wired network port:

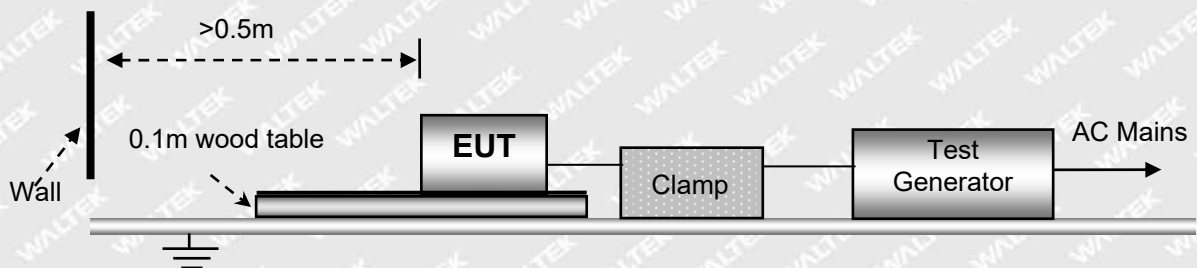



6.5.3 Test Result

Coupling point	Test Port	Applied Voltage (kV)	Performance criterion	Result
AC power port	Between Phase And Phase	± 1	B	N/A
	Between Live And Neutral	± 1	B	Pass*
	Between Live And Earth	± 2	B	N/A
	Between Neutral And Earth	± 2	B	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.6 RF Common Mode 0,15 MHz to 80MHz (CS)

Test Requirement	: ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 61000-4-6
Frequency Range	: 150kHz to 80MHz
Test level	: 3V rms (unmodulated emf into 150 Ω)
Modulation	: 80%, 1kHz Amplitude Modulation.

6.6.1 E.U.T. Operation

Operating Environment:

Temperature	: 22.5°C
Humidity	: 47.2%RH
Atmospheric Pressure	: 100.2kPa


EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: Communication mode


6.6.2 Block Diagram of Test Setup

The Injected Currents Immunity test was performed in accordance with the EN 61000-4-6.

For AC Mains or DC Ports:

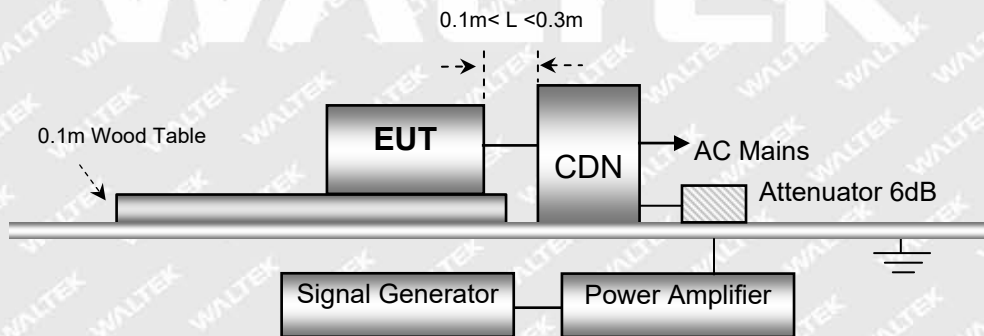

For Signal, Wired network or Control Ports:

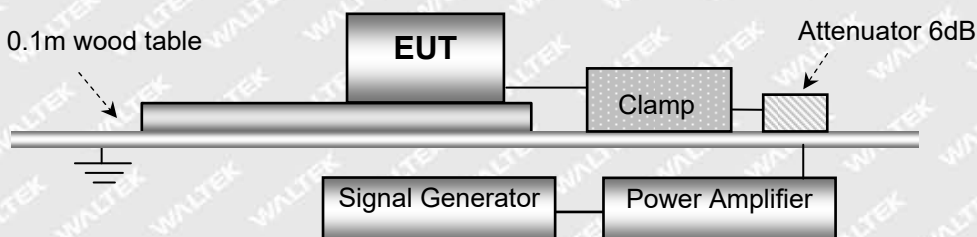



6.6.3 Test Result

Line	Voltage Level	Modulation	Step Size	Dwell Time	Performance Criteria	Test Result
AC mains power port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
DC power port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A
Signal port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A
Wired network port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A
Control port	3Vr.m.s	80%, 1kHz Amp. Mod.	1%	1s	A	N/A

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.7 Voltage Dips and Interruptions

Test Requirement	: ETSI EN 301 489-3, ETSI EN 301 489-17
Test Method	: ETSI EN 301 489-1, EN 61000-4-11
No. of Dips / Interruptions	: 3 per Level at 10ms intervals
Test Level(Voltage reduction)	: 0%&70 % of U_T (Supply Voltage)

6.7.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.5°C
Humidity	: 47.2%RH
Atmospheric Pressure	: 100.2 kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: Communication mode

6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the EN 61000-4-11.

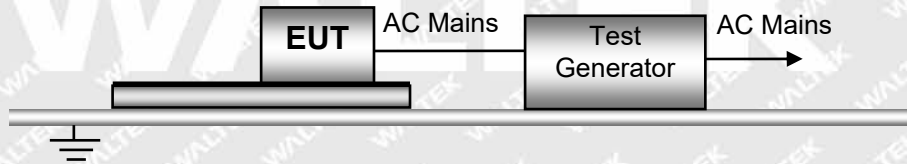

6.7.3 Test Result

Type	Test Level in % U_T	Phase	Duration	Performance criterion	Result
Voltage Dips	0	0° & 180°	0.5	B	Pass*
	0	0° & 180°	1	B	Pass*
	70	0° & 180°	25	B	Pass*
Voltage Interruption	0	0° & 180°	250	B	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



7 Photographs - Test Setup

7.1 Photograph - Radiated Emissions Test Setup

Below 1000MHz



Above 1000MHz





7.2 Photograph - Conducted Emissions Test Setup




7.3 Photograph - Voltage Fluctuations Test Setup





7.4 Photograph - RF Electromagnetic Field Test Setup

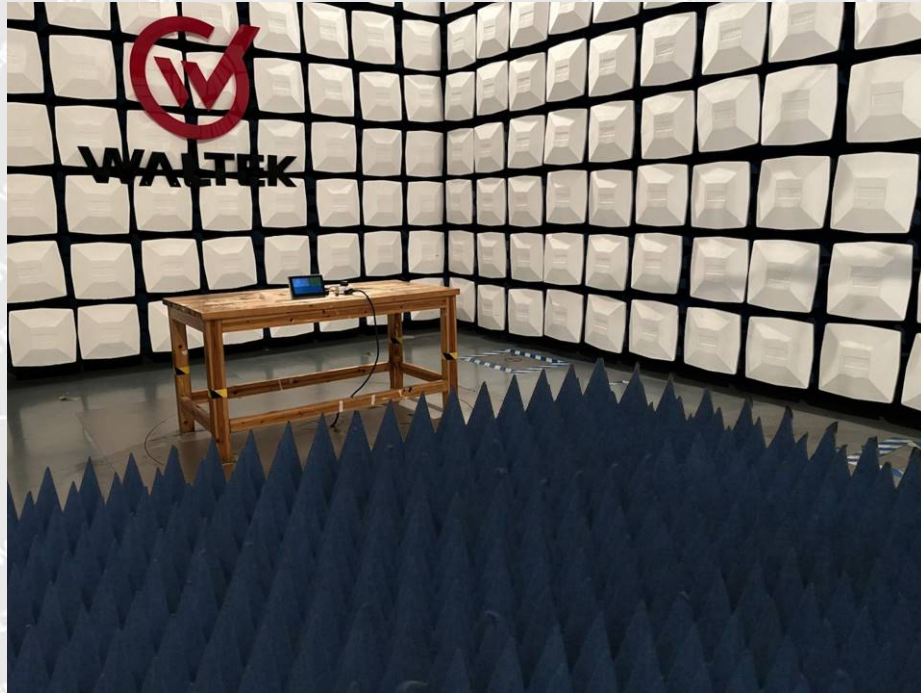

7.5 Photograph - ESD Test Setup





7.6 Photograph - EFT Immunity Test Setup




7.7 Photograph - Surge Immunity Test Setup





7.8 Photograph - Radio-frequency Common Mode Test Setup

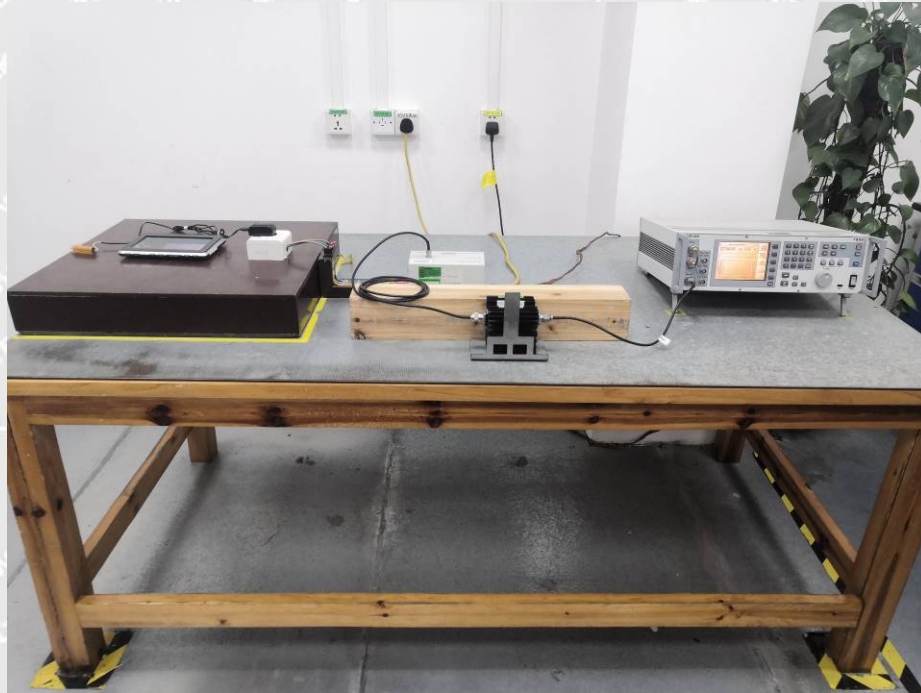

7.9 Photograph - Voltage Dips and Interruptions Immunity Test Setup





8 Photographs - Constructional Details

8.1 EUT – External Photos





Indoor Unit











Outdoor Unit

















8.2 EUT – Internal Photos


Indoor Unit

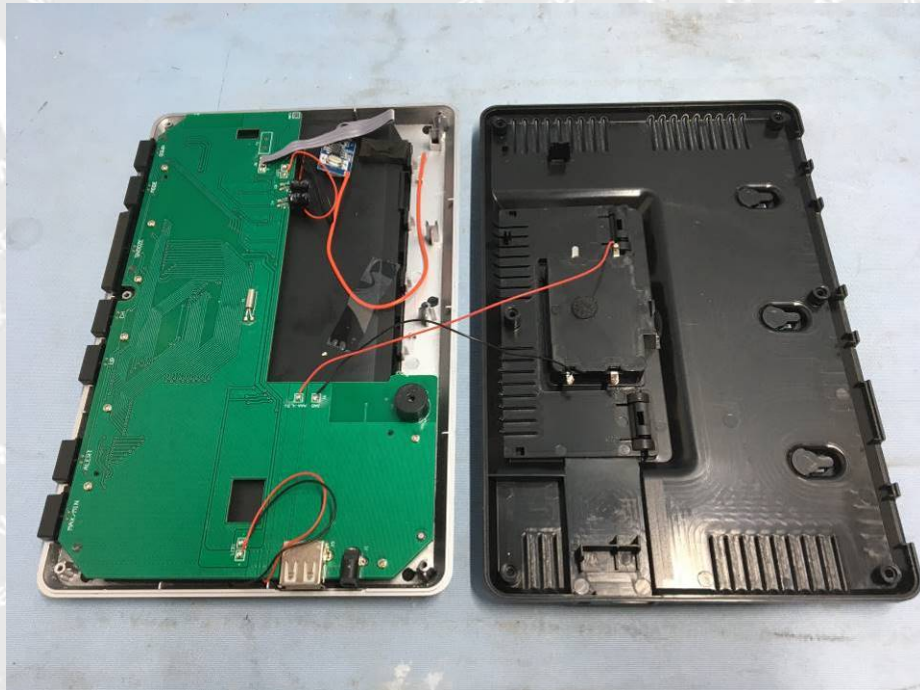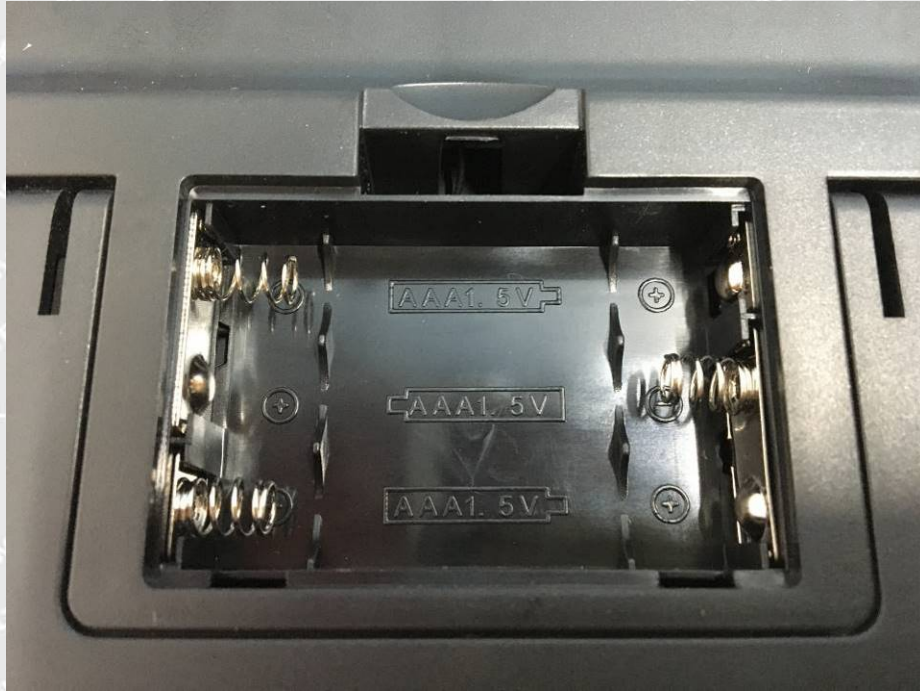

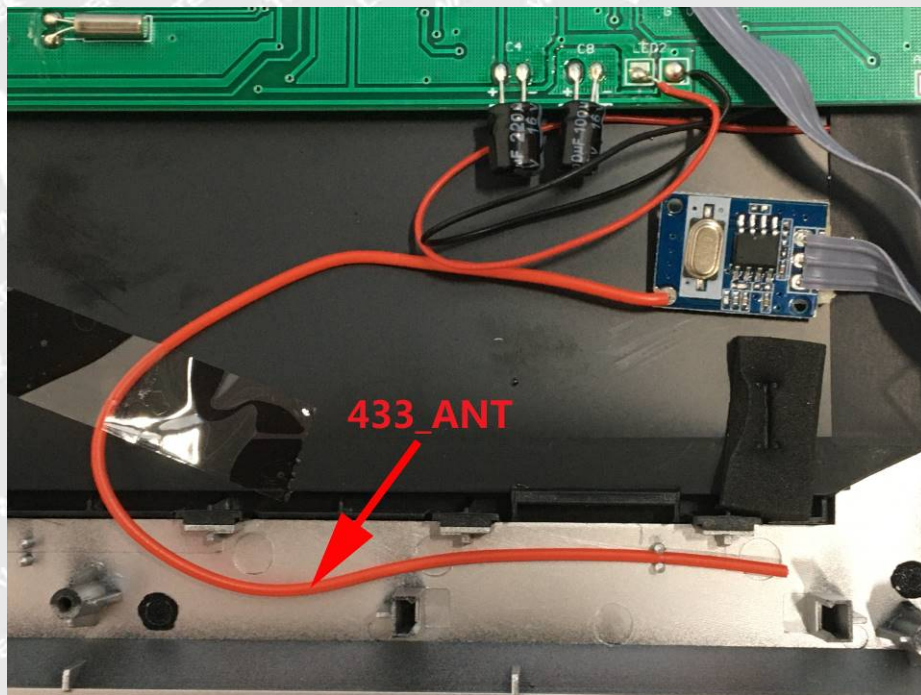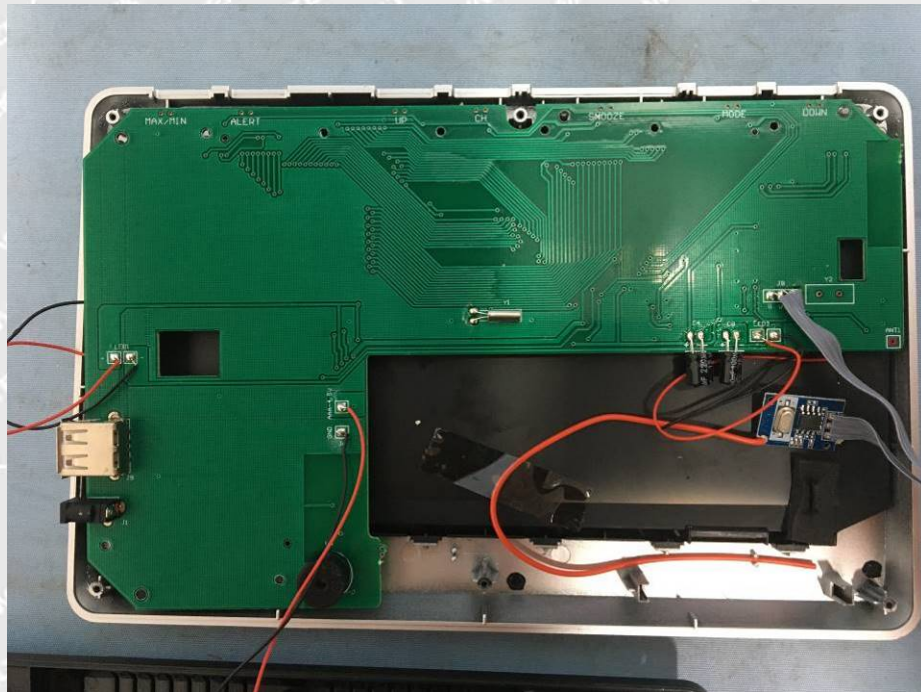

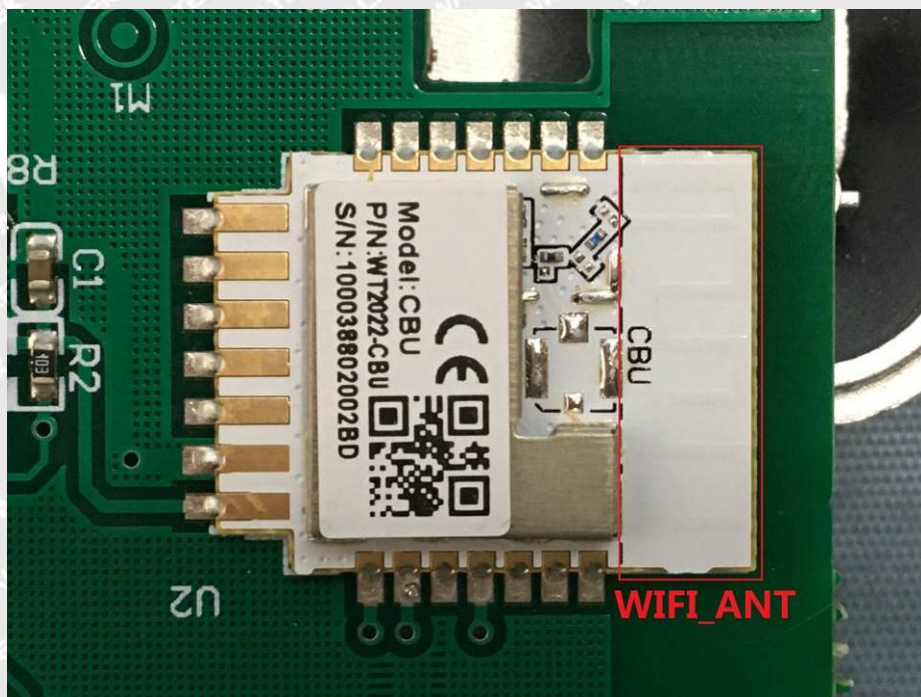
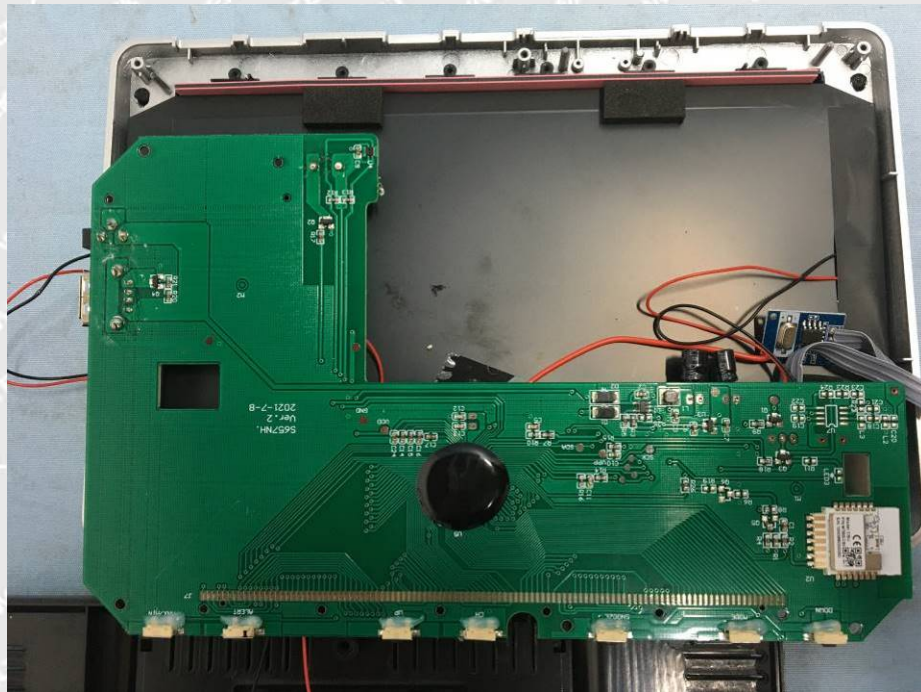


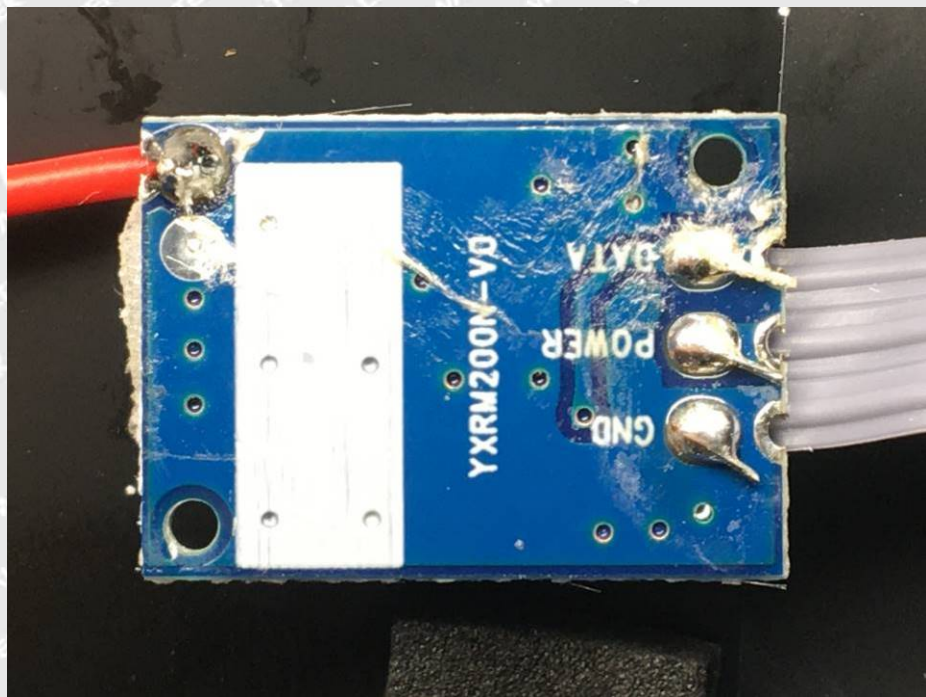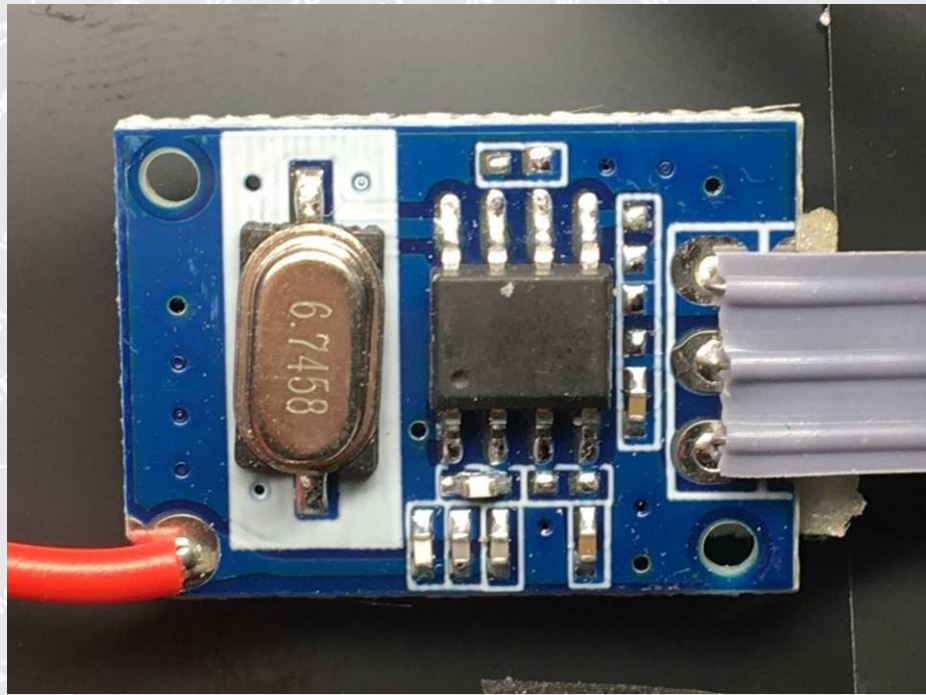


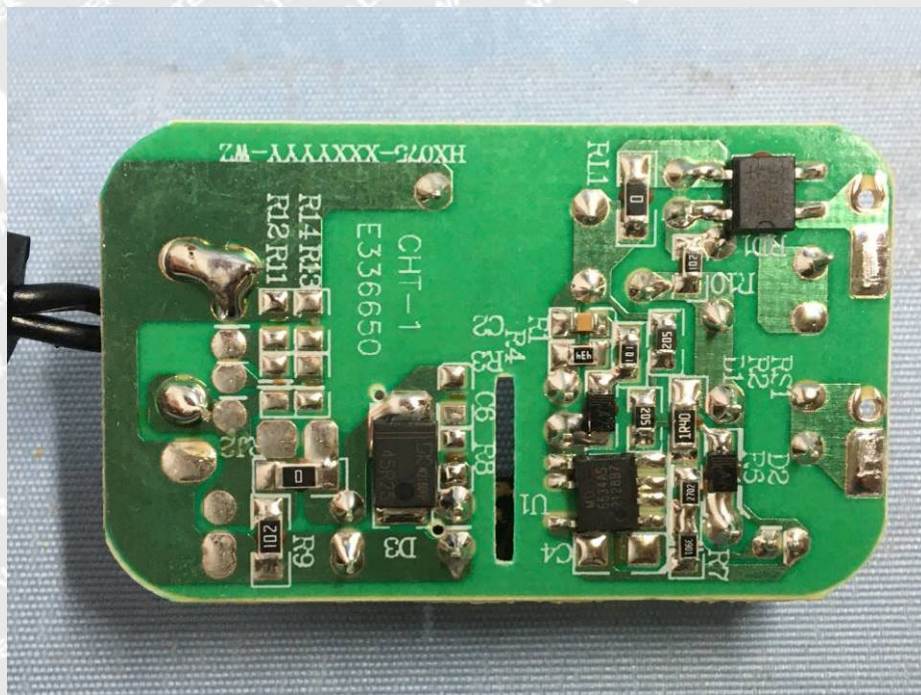



Outdoor Unit

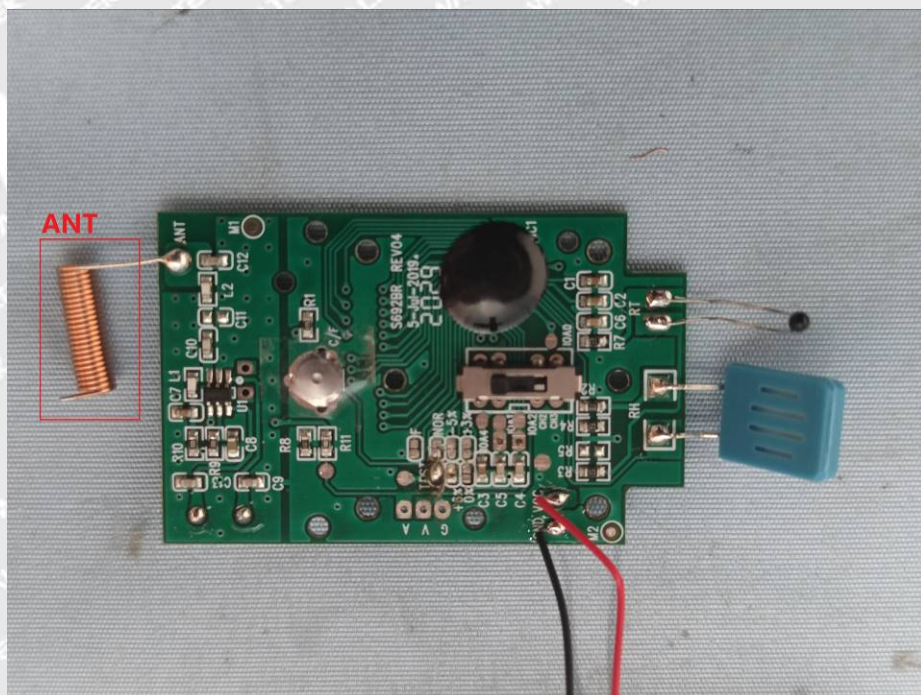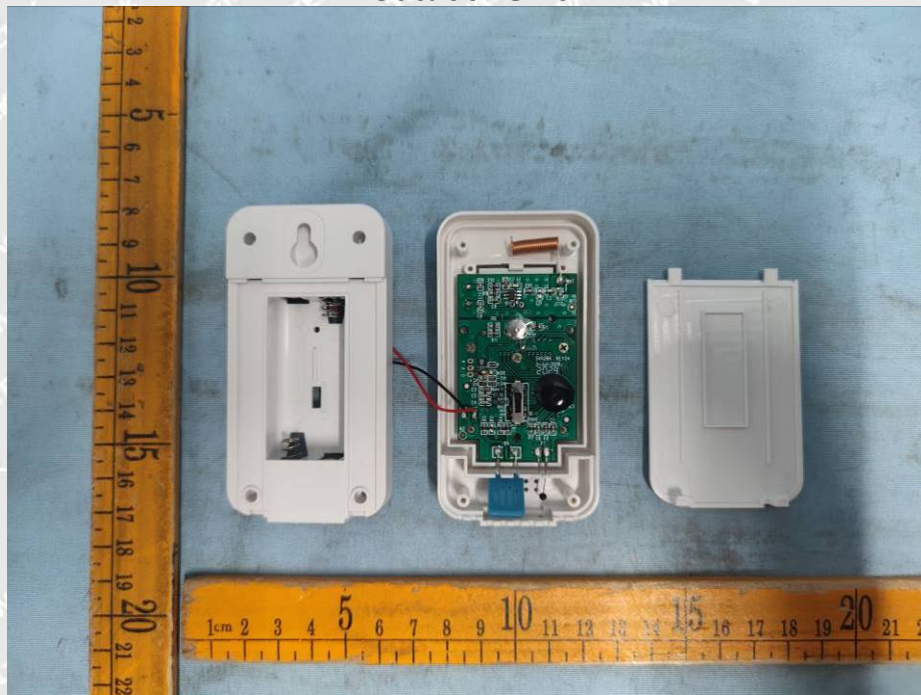

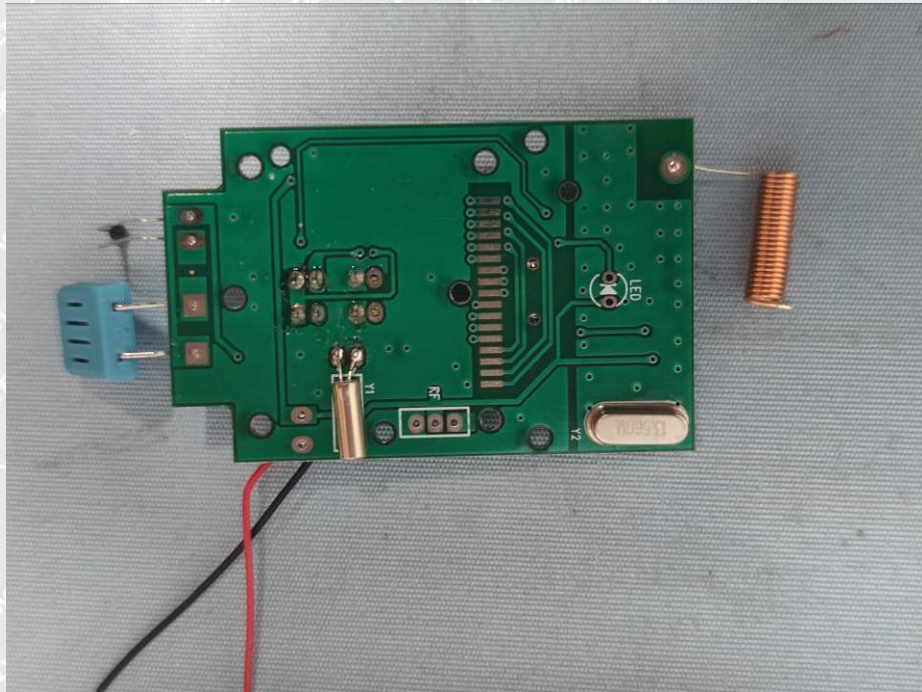

====End of Report====



中国认可
国际互认
检测
TESTING
CNAS L6478



TEST REPORT

Reference No...... : WTF22F05099988W
Applicant..... : Mid Ocean Brands B.V.
Address..... : 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer : 111590
Product Name..... : Weatherstation
Model No...... : MO6664
Test specification..... : EN 55032:2015+A11:2020
EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019
EN 61000-3-3:2013+A1:2019
Date of Receipt sample : 2022-05-26
Date of Test : 2022-05-27 to 2022-07-25
Date of Issue..... : 2022-08-01
Test Report Form No...... : WEI-55032A-04A
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Danny Zhou



1 Test Summary

EMISSION				
Test Item	Test Standard	Class / Severity	Result	
Mains Terminal Disturbance Voltage, 150kHz to 30MHz	EN 55032:2015+A11:2020	Table A.10	Pass	
Radiated Emission, 30MHz to 1000MHz	EN 55032:2015+A11:2020	Table A.4	Pass	
Radiation Emission, 1GHz to 6GHz	EN 55032:2015+A11:2020	Table A.5	Pass	
Harmonic Current Emission	EN IEC 61000-3-2:2019	Class A	Pass**	
Voltage Fluctuation and Flicker	EN 61000-3-3:2013+A1:2019	Clause 5	Pass	
IMMUNITY (EN 55035:2017+A11:2020)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 Kv Contact ±8 Kv Air	B	Pass
Continuous RF Electromagnetic Field Disturbances	IEC 61000-4-3: 2006+A1+A2	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass
Electrical Fast Transients (EFT)	IEC 61000-4-4:2012	AC ±1.0Kv DC ±0.5Kv	B	Pass
Surge	IEC 61000-4-5:2005	±1Kv D.M.† ±2Kv C.M.‡	B	Pass
Continuous Induced RF Disturbances, 0.15MHz to 10MHz	IEC 61000-4-6:2008	3Vr.m.s.(emf), 80%, 1kHz Amp. Mod.	A	Pass
Continuous Induced RF Disturbances, 10MHz to 30MHz		3 to 1Vr.m.s.(emf), 80%, 1kHz Amp. Mod	A	
Continuous Induced RF Disturbances, 30MHz to 80MHz		1Vr.m.s.(emf), 80%, 1kHz Amp. Mod	A	
Power-Frequency Magnetic Field	IEC 61000-4-8:2009	1A/m	A	N/A
Voltage Dips	IEC 61000-4-11:2004	< 5 % U _T * for 0.5per	B	Pass
		70 % U _T * for 25/30per	C	
Voltage Interruptions		< 5 % U _T * for 250/300per	C	

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

A.M Amplitude Modulation

† Differential Mode

‡ Common Mode

* U_T is the nominal supply voltage

** According to EN IEC 61000-3-2 which states:“ For the following categories of equipment limits are not specified in this edition of the standard. Equipment with a rated power of 75W or less, other than lighting equipment” Therefore there is no need for harmonics test to be performed on this product and deemed to fulfil emission requirements without testing.



2 Contents

	Page
COVER PAGE	1
1 TEST SUMMARY	2
2 CONTENTS	3
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF E.U.T.	5
3.2 DETAILS OF E.U.T.	5
3.3 DESCRIPTION OF SUPPORT UNITS	5
3.4 STANDARDS APPLICABLE FOR TESTING	5
3.5 TEST FACILITY.....	6
3.6 SUBCONTRACTED.....	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
4 EQUIPMENT USED DURING TEST	7
4.1 SOFTWARE LIST	9
4.2 MEASUREMENT UNCERTAINTY	9
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4 DECISION RULE.....	10
5 EMISSION TEST RESULTS	11
5.1 MAINS TERMINALS DISTURBANCE VOLTAGE, 150 KHZ TO 30MHZ.....	11
5.1.1 <i>E.U.T. Operation</i>	11
5.1.2 <i>Block Diagram of Test Setup</i>	11
5.1.3 <i>Measurement Data</i>	11
5.1.4 <i>Corrected Amplitude & Margin Calculation</i>	12
5.1.5 <i>Mains Terminals Disturbance Voltage Test Data</i>	12
5.2 RADIATED EMISSION, 30MHZ TO 1GHZ	14
5.2.1 <i>E.U.T. Operation</i>	14
5.2.2 <i>Block Diagram of Test Setup</i>	14
5.2.3 <i>Measurement Data</i>	14
5.2.4 <i>Corrected Amplitude & Margin Calculation</i>	15
5.2.5 <i>Radiated Emission Test Data</i>	15
5.3 RADIATED EMISSION, 1GHZ TO 6GHZ.....	19
5.3.1 <i>E.U.T. Operation</i>	19
5.3.2 <i>Block Diagram of Test Setup</i>	19
5.3.3 <i>Measurement Data</i>	19
5.3.4 <i>Corrected Amplitude & Margin Calculation</i>	20
5.3.5 <i>Radiated Emission Test Data</i>	20
5.4 VOLTAGE FLUCTUATION AND FLICKER	24
5.4.1 <i>E.U.T. Operation</i>	24
5.4.2 <i>Block Diagram of Setup</i>	24
5.4.3 <i>Voltage Fluctuation and Flicker Test Data</i>	25
6 IMMUNITY TEST RESULTS	26
6.1 PERFORMANCE CRITERIA	26
6.2 ELECTROSTATIC DISCHARGE (ESD).....	27
6.2.1 <i>E.U.T. Operation</i>	27
6.2.2 <i>Block Diagram of Setup</i>	27
6.2.3 <i>Direct Discharge Test Results</i>	28
6.2.4 <i>Indirect Discharge Test Results</i>	28
6.3 CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES.....	29
6.3.1 <i>E.U.T. Operation</i>	29
6.3.2 <i>Block Diagram of Setup</i>	29



6.3.3	Test Results.....	30
6.4	ELECTRICAL FAST TRANSIENTS (EFT).....	31
6.4.1	E.U.T. Operation.....	31
6.4.2	Block Diagram of Setup.....	32
6.4.3	Test Results.....	32
6.5	SURGE.....	33
6.5.1	E.U.T. Operation.....	33
6.5.2	Block Diagram of Setup.....	33
6.5.3	Test Result.....	34
6.6	CONTINUOUS INDUCED RF DISTURBANCE.....	35
6.6.1	E.U.T. Operation.....	35
6.6.2	Block Diagram of Setup.....	35
6.6.3	Test Results.....	36
6.7	VOLTAGE DIPS AND INTERRUPTIONS.....	37
6.7.1	E.U.T. Operation.....	37
6.7.2	Block Diagram of Setup.....	37
6.7.3	Test Results.....	38
7	PHOTOGRAPHS – TEST SETUP	39
7.1	PHOTOGRAPH – MAINS TERMINAL DISTURBANCE VOLTAGE TEST SETUP	39
7.2	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 30MHZ TO 1GHZ.....	39
7.3	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 1GHZ TO 6GHZ.....	40
7.4	PHOTOGRAPH – VOLTAGE FLUCTUATION AND FLICKER TEST SETUP.....	40
7.5	PHOTOGRAPH – ESD IMMUNITY TEST SETUP.....	41
7.6	PHOTOGRAPH – CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES TEST SETUP	41
7.7	PHOTOGRAPH – EFT IMMUNITY TEST SETUP.....	42
7.8	PHOTOGRAPH – SURGE IMMUNITY TEST SETUP.....	42
7.9	PHOTOGRAPH – CONTINUOUS INDUCED RF DISTURBANCE TEST SETUP	43
7.10	PHOTOGRAPH – VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP	43
8	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	44
8.1	EUT – FRONT VIEW.....	44
8.2	EUT – BACK VIEW.....	44
8.3	EUT – ADAPTER LABEL VIEW.....	45



3 General Information

3.1 General Description of E.U.T.

Product Name : Weatherstation
Model No. : MO6664
Remark : ---

3.2 Details of E.U.T.

Technical Data : **Outdoor Unit:** Battery 3V (2*1.5V AAA)
Indoor Unit:
Battery 4.5V (3*1.5V AAA)
Adapter Input: 100-240V~, 50/60Hz, 0.3A Max
Adapter Output: DC 5V, 1.2A, 6.0W

3.3 Description of Support Units

The EUT has been tested as an independent unit. MO6664 is the test sample. The DV&RE tests were performed in the condition of AC 240V/50Hz input. The RE test was performed in the additional condition of battery powered. The other tests were performed in the condition of AC 230V/50Hz input.

3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN 55032:2015+A11:2020	Electromagnetic compatibility of multimedia equipment — Emission Requirements
EN 55035:2017+A11:2020	Electromagnetic compatibility of multimedia equipment - Immunity requirements
EN IEC 61000-3-2:2019	Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase).
EN 61000-3-3:2013+A1:2019	Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current \leq 16 A per phase and not subject to conditional connection.



3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.7 Abnormalities from Standard Conditions

None.



4 Equipment Used during Test

<input type="checkbox"/> Mains Terminal Disturbance Voltage (Conducted Emission) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102423	Valid
2.	LISN	R&S	ENV216	101343	Valid
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	Valid
4.	Switch	CD	RSU-A4 18G	RSUA4008	Valid
<input checked="" type="checkbox"/> Mains Terminal Disturbance Voltage (Conducted Emission) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESCI	101178	Valid
2.	LISN	R&S	ENV216	101215	Valid
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	Valid
4.	Switch	ESE	RSU/M2	---	Valid
<input type="checkbox"/> Mains Terminal Disturbance Voltage (Conducted Emission) 3#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102842	Valid
2.	LISN	R&S	ENV216	101542	Valid
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	Valid
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	Valid
<input checked="" type="checkbox"/> Radiated Emission (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	Valid
<input type="checkbox"/> Radiated Emission (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	10m×5.3m×3.5m	YH2021071804	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	Valid
4.	Coaxial Cable (below 1GHz)	Times-Microwave Systems	LMR240UF-NMSM-7.5	-	Valid



<input checked="" type="checkbox"/> Radiated Emission (1GHz to 6GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	Valid
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	Valid
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	Valid
<input type="checkbox"/> Radiated Emission (1GHz to 6GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	10m×5.3m×3.5m	YH2021071804	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA9120D	02465	Valid
4.	Coaxial Cable (above 1GHz)	Times-Microwave Systems	SFT205-NMSM-7	-	Valid
5.	Preamplifier	Tonscend	TAP0118045	AP21J806168	Valid
<input checked="" type="checkbox"/> Harmonics and Flicker Measuring System					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Harmonics and Flicker Measuring System	TESEQ	CCN1000-1	1133A01498	Valid
<input checked="" type="checkbox"/> ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
<input checked="" type="checkbox"/> EFT & Voltage Dips and Interruptions					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMS test system	TESEQ	NSG3040	1858	Valid
<input checked="" type="checkbox"/> Surge					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Surge Simulator	TESEQ	NSG3060	1395	Valid
<input checked="" type="checkbox"/> Injected Currents					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Conducted Immunity test system	TESEQ	NSG4070	31469	Valid
2.	CDN	TESEQ	CDN M016	31586	Valid
3.	6dB Attenuator	TESEQ	ATN6075	32122	Valid



<input checked="" type="checkbox"/> Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	OPHIR	5225R	1051/1712	Valid
2.	RF Power Amplifier	OPHIR	5293RE	1051/171	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	RF signal generator	Agilent	N5181A	MY48180720	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

: Not Used

: Used

4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-1
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-1
Harmonics and Flicker Test Software	TESEQ	Win2100	V4.28
Radiated Immunity Test Software	TONSCEND	JS35-RS	V2.0.1.7

4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emission	150kHz~30MHz	±3.2dB	(1)
Radiated Emission	30MHz~1GHz	±4.1dB	(1)
Radiated Emission	1GHz~6GHz	±5.0dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{LAB} is less than or equal to U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{LAB} is greater than U_{cispr} , then

- Compliance is deemed to occur if no measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{LAB} - U_{cispr})$, exceeds the disturbance limit.

WALTEK



5 Emission Test Results

5.1 Mains Terminals Disturbance Voltage, 150 kHz to 30MHz

Test Requirement	: EN 55032 Annex A.3
Test Method	: EN 55032 Annex A.3
Test Result	: Pass
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Table A.10 of EN 55032
Classification	: ClassB

5.1.1 E.U.T. Operation

Operating Environment:


Temperature	: 24.8°C
Humidity	: 49.3%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage	: AC 240V/50Hz
Operating Mode	: Adapter power mode

5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the CISPR 16-1-2.

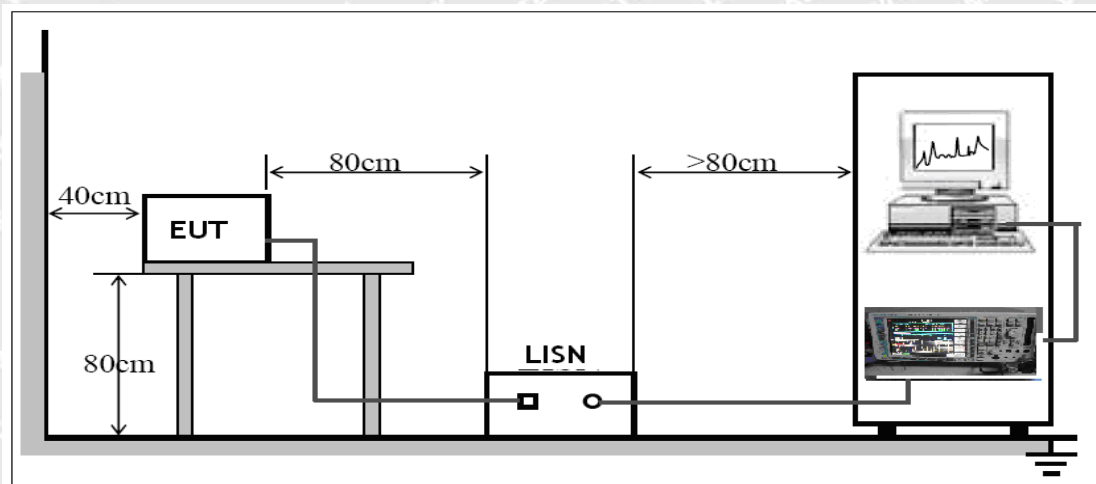

5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



5.1.4 Corrected Amplitude & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$


$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Measurement} - \text{Limit}$$

5.1.5 Mains Terminals Disturbance Voltage Test Data


Live Line

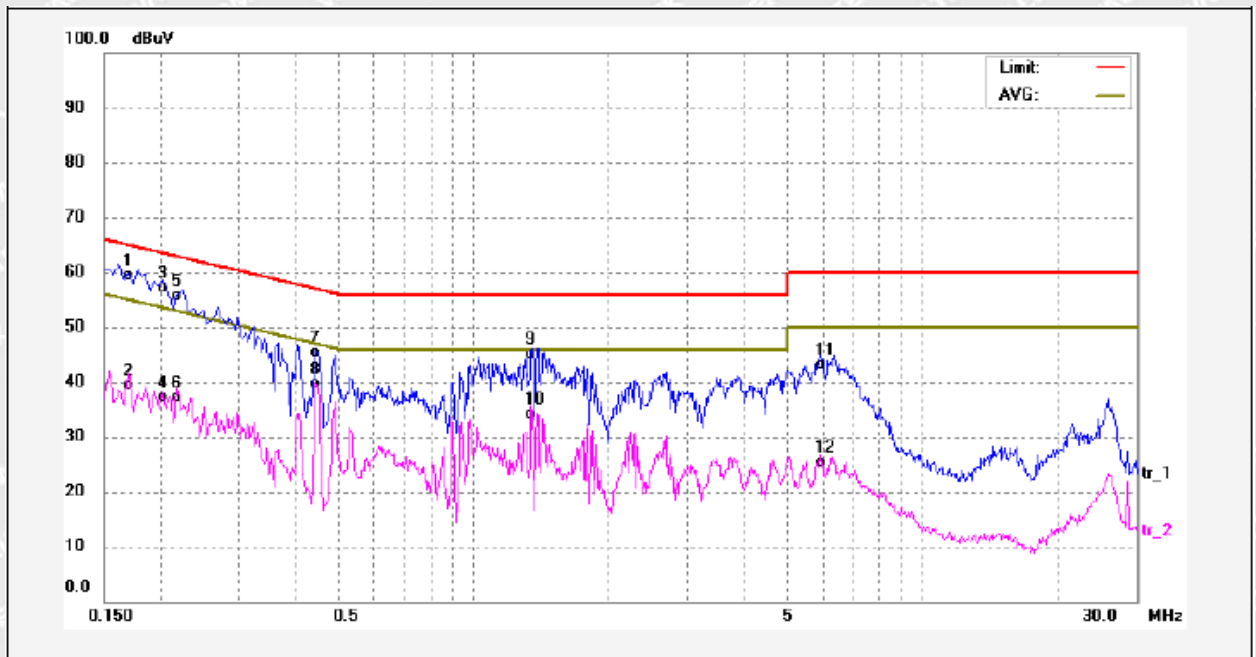

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1712	48.61	9.65	58.26	64.90	-6.64	QP	
2	0.1712	28.80	9.65	38.45	54.90	-16.45	AVG	
3	0.2020	46.59	9.66	56.25	63.52	-7.27	QP	
4	0.2020	26.49	9.66	36.15	53.52	-17.37	AVG	
5	0.2180	44.90	9.66	54.56	62.89	-8.33	QP	
6	0.2180	26.54	9.66	36.20	52.89	-16.69	AVG	
7	0.4460	34.63	9.68	44.31	56.95	-12.64	QP	
8	0.4460	28.98	9.68	38.66	46.95	-8.29	AVG	
9	1.3500	34.51	9.72	44.23	56.00	-11.77	QP	
10	1.3500	23.48	9.72	33.20	46.00	-12.80	AVG	
11	5.9420	32.32	9.87	42.19	60.00	-17.81	QP	
12	5.9420	14.48	9.87	24.35	50.00	-25.65	AVG	



Neutral Line

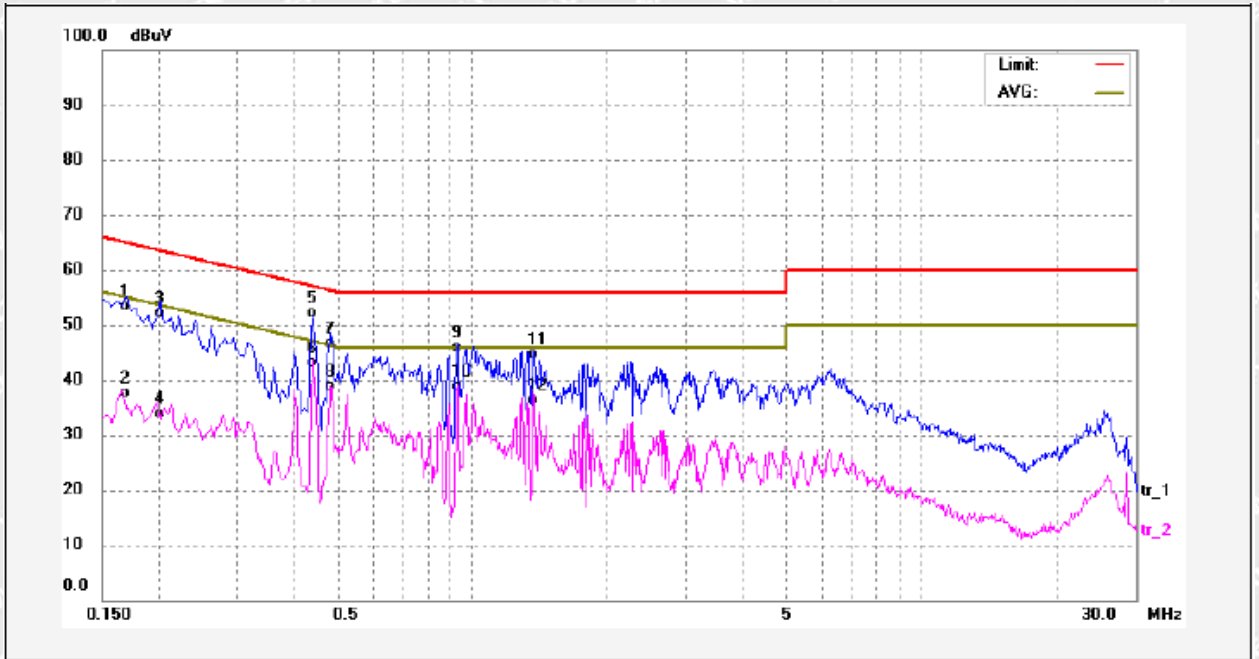

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	42.71	9.65	52.36	64.96	-12.60	QP	
2	0.1700	26.94	9.65	36.59	54.96	-18.37	AVG	
3	0.2020	41.58	9.66	51.24	63.52	-12.28	QP	
4	0.2020	23.10	9.66	32.76	53.52	-20.76	AVG	
5	0.4420	41.50	9.68	51.18	57.02	-5.84	QP	
6	0.4420	32.47	9.68	42.15	47.02	-4.87	AVG	
7	0.4860	35.92	9.70	45.62	56.24	-10.62	QP	
8	0.4860	28.18	9.70	37.88	46.24	-8.36	AVG	
9	0.9260	35.29	9.70	44.99	56.00	-11.01	QP	
10	0.9260	28.17	9.70	37.87	46.00	-8.13	AVG	
11	1.3740	33.81	9.75	43.56	56.00	-12.44	QP	
12	1.3740	25.51	9.75	35.26	46.00	-10.74	AVG	



5.2 Radiated Emission, 30MHz to 1GHz

Test Requirement	: EN 55032 Annex A.2
Test Method	: EN 55032 Annex A.2
Test Limit.....	: Table A.4 of EN 55032
Test Result	: Pass
Frequency Range	: 30MHz to 1000MHz
Class.....	: Class B

5.2.1 E.U.T. Operation

Operating Environment:


Temperature.....	: 21.5°C
Humidity	: 51.2%RH
Atmospheric Pressure	: 101.3kPa

EUT Operation:

Input Voltage.....	: AC 240V/50Hz; Battery 4.5V
Operating Mode	: Adapter power mode; Battery power mode

5.2.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

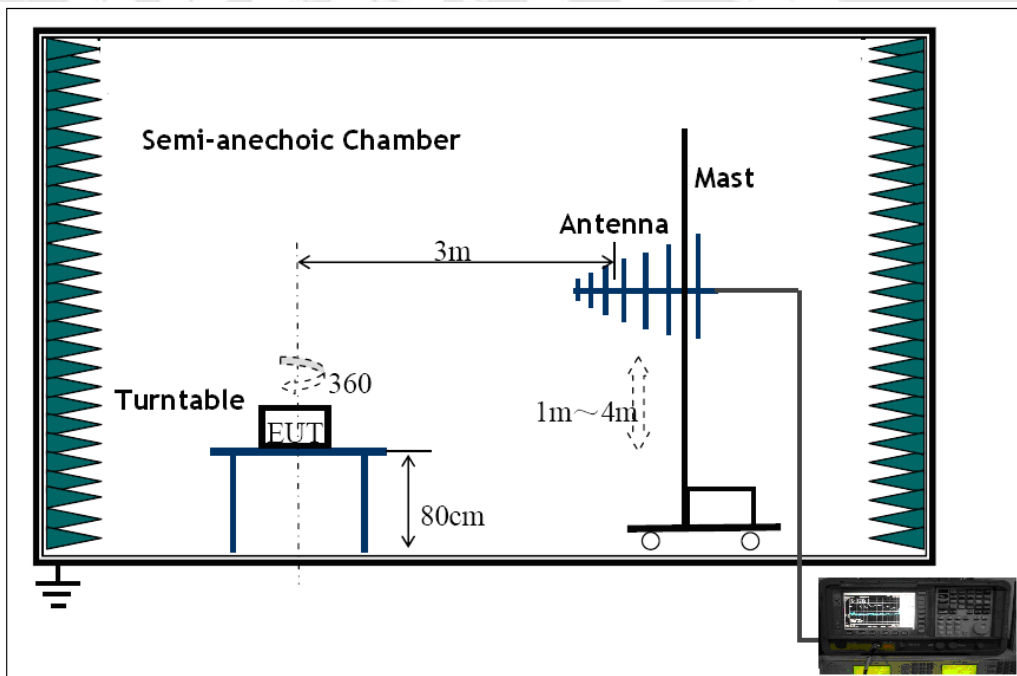

5.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.2.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.


The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.2.5 Radiated Emission Test Data

Adapter power mode

Vertical Polarization

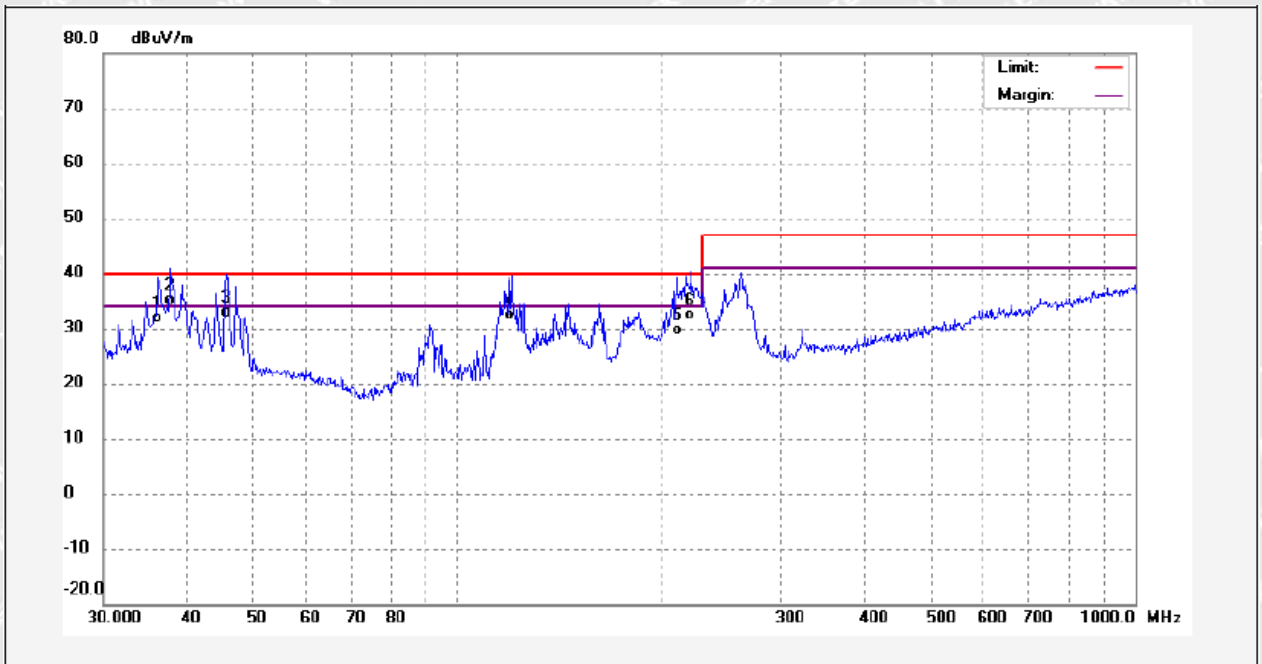

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	36.1272	19.50	12.38	31.88	40.00	-8.12	QP	
2	37.7327	22.61	12.63	35.24	40.00	-4.76	QP	
3	45.5988	19.33	13.59	32.92	40.00	-7.08	QP	
4	119.4780	22.69	9.74	32.43	40.00	-7.57	QP	
5	211.4523	17.40	12.23	29.63	40.00	-10.37	QP	
6	220.7719	19.60	12.79	32.39	40.00	-7.61	QP	



Horizontal Polarization




No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	117.5661	25.15	11.77	36.92	40.00	-3.08	QP	
2	185.7230	23.46	11.36	34.82	40.00	-5.18	QP	
3	217.8496	24.51	12.72	37.23	40.00	-2.77	QP	
4	223.8903	26.83	13.02	39.85	40.00	-0.15	QP	
5	257.7832	32.39	13.90	46.29	47.00	-0.71	QP	
6	263.9113	32.63	13.96	46.59	47.00	-0.41	QP	



Battery power mode


Vertical Polarization

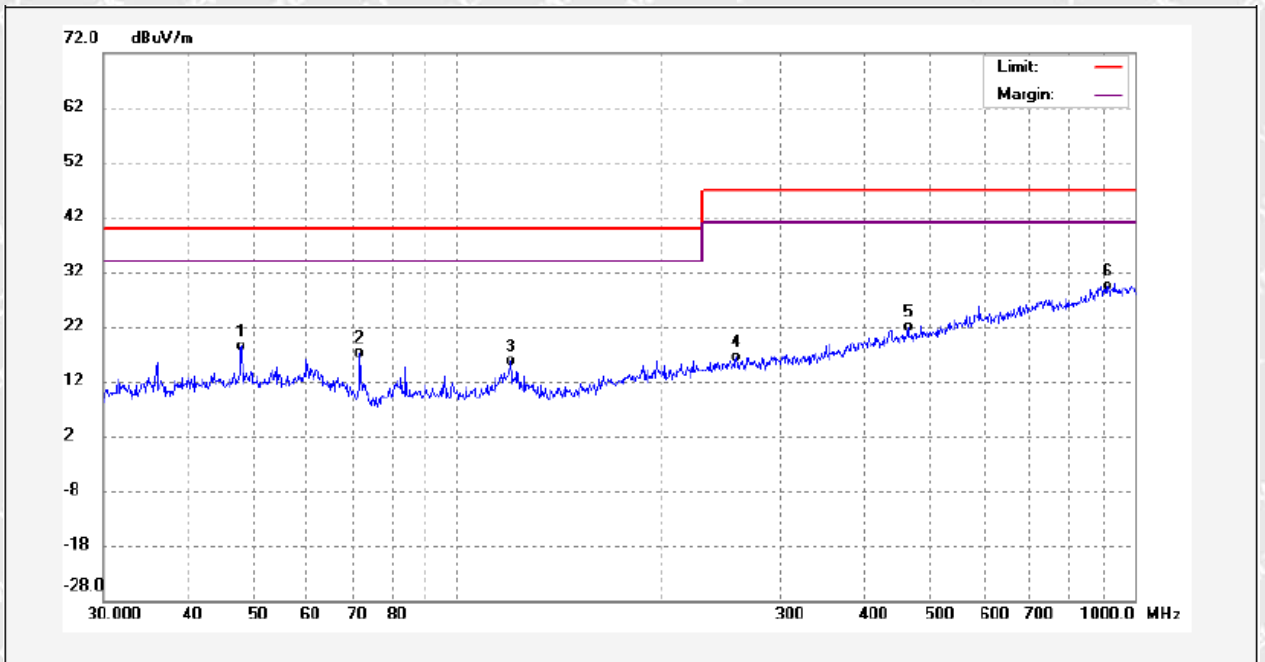

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.9940	4.75	13.56	18.31	40.00	-21.69	QP	
2	71.9833	6.61	10.40	17.01	40.00	-22.99	QP	
3	120.0238	3.08	12.46	15.54	40.00	-24.46	QP	
4	259.1429	0.59	15.77	16.36	47.00	-30.64	QP	
5	463.6444	1.45	20.37	21.82	47.00	-25.18	QP	
6	915.4264	1.63	27.81	29.44	47.00	-17.56	QP	



Horizontal Polarization

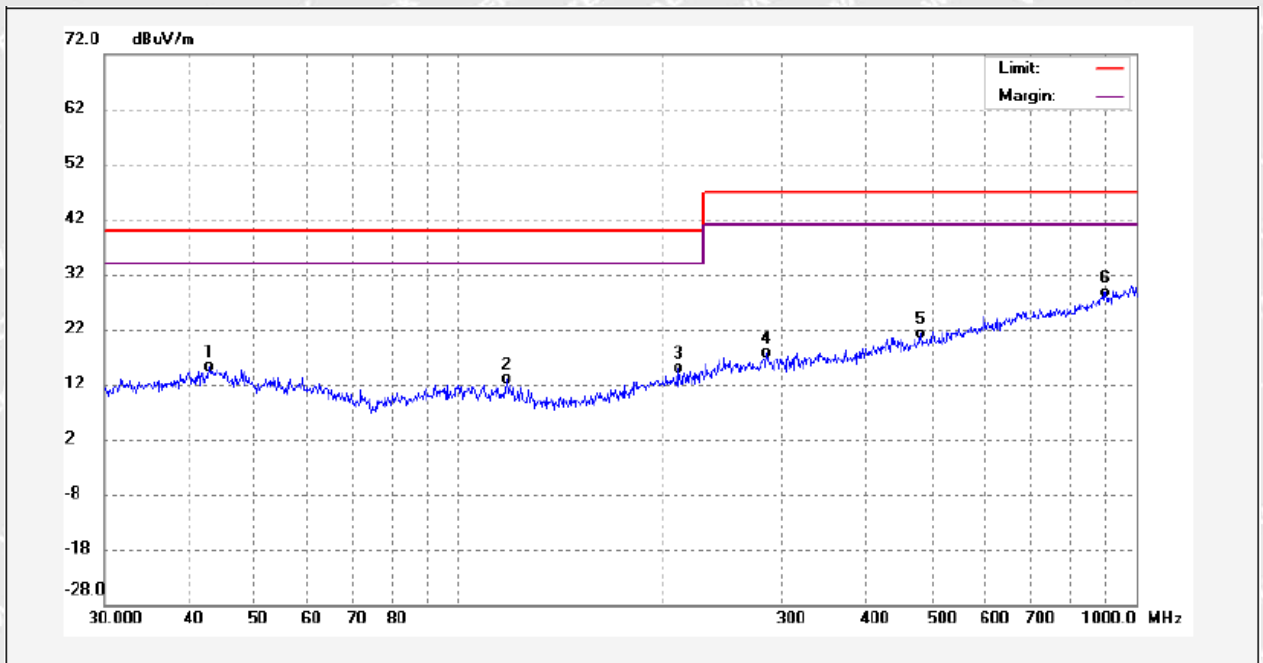

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	42.9299	-0.27	15.34	15.07	40.00	-24.93	QP	
2	118.0620	1.61	11.24	12.85	40.00	-27.15	QP	
3	210.8600	1.52	13.48	15.00	40.00	-25.00	QP	
4	285.7773	1.82	15.89	17.71	47.00	-29.29	QP	
5	480.8647	1.36	19.65	21.01	47.00	-25.99	QP	
6	900.1474	2.38	26.37	28.75	47.00	-18.25	QP	



5.3 Radiated Emission, 1GHz to 6GHz

Test Requirement	: EN 55032 Annex A.2
Test Method	: EN 55032 Annex A.2
Test Limit.....	: Table A.5 of EN 55032
Test Result	: Pass
Frequency Range	: 1GHz to 6GHz
Class.....	: Class B

5.3.1 E.U.T. Operation

Operating Environment:


Temperature.....	: 23.8°C
Humidity	: 52.8%RH
Atmospheric Pressure	: 101.2kPa

EUT Operation:

Input Voltage.....	: AC 240V/50Hz; Battery 4.5V
Operating Mode	: Adapter power mode; Battery power mode

5.3.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

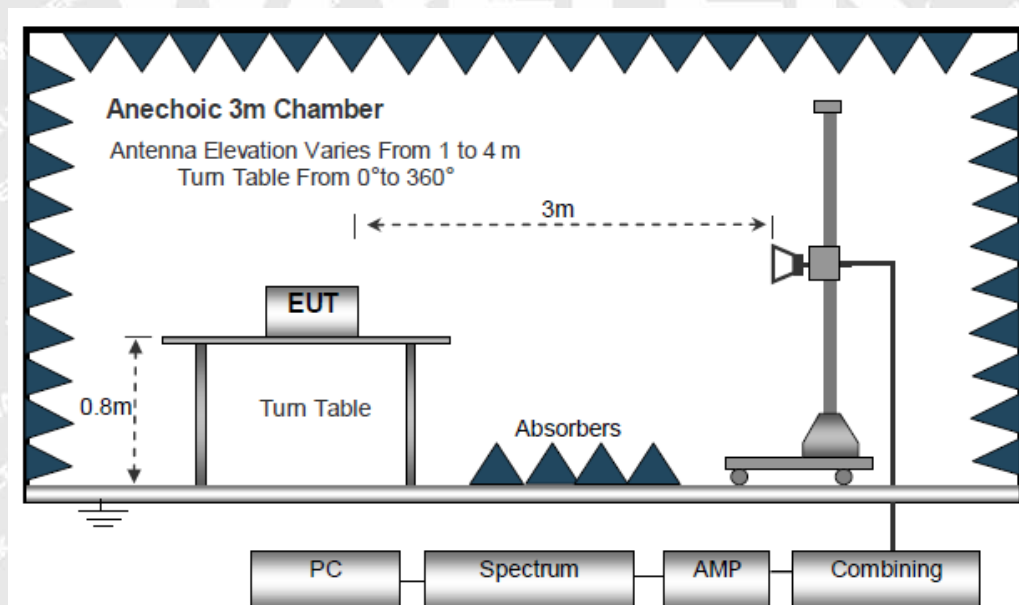

5.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



5.3.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

5.3.5 Radiated Emission Test Data

Adapter power mode


Vertical Polarization

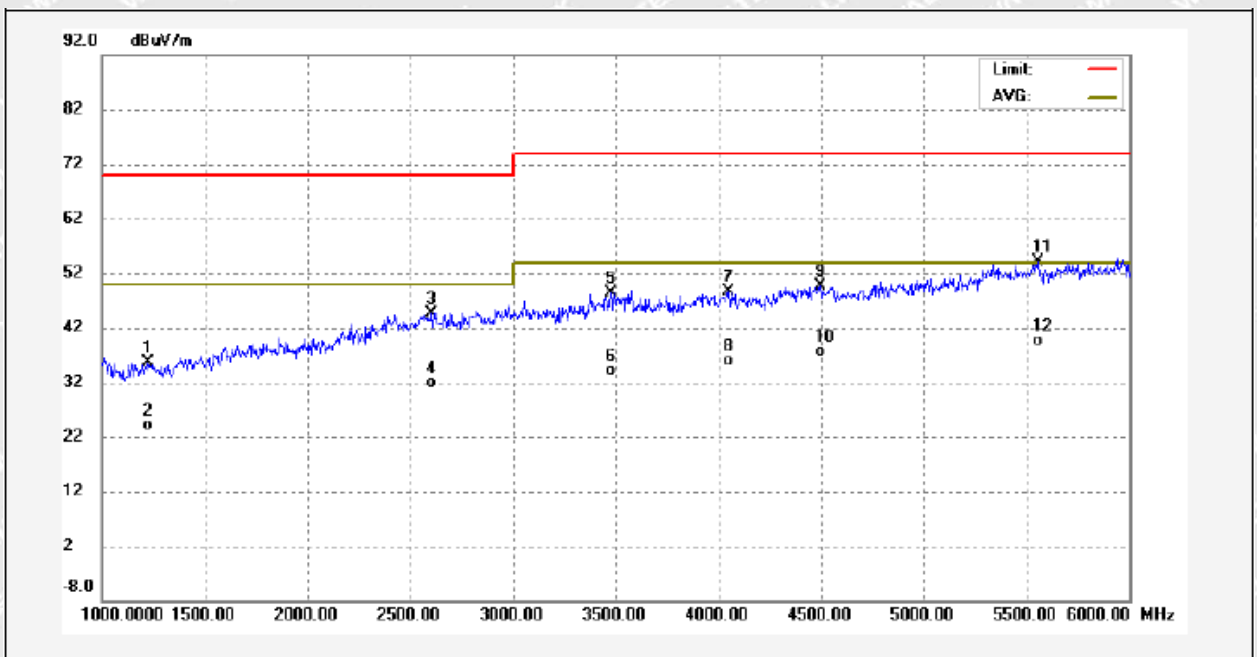

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1223.500	8.21	27.43	35.64	70.00	-34.36	peak	
2	1223.500	-3.39	27.43	24.04	50.00	-25.96	AVG	
3	2607.500	11.41	33.34	44.75	70.00	-25.25	peak	
4	2607.500	-1.57	33.34	31.77	50.00	-18.23	AVG	
5	3477.500	13.12	35.29	48.41	74.00	-25.59	peak	
6	3477.500	-1.15	35.29	34.14	54.00	-19.86	AVG	
7	4053.500	11.56	37.05	48.61	74.00	-25.39	peak	
8	4053.500	-1.11	37.05	35.94	54.00	-18.06	AVG	
9	4498.500	11.68	38.07	49.75	74.00	-24.25	peak	
10	4498.500	-0.49	38.07	37.58	54.00	-16.42	AVG	
11	5559.500	13.82	40.41	54.23	74.00	-19.77	peak	
12	5559.500	-0.81	40.41	39.60	54.00	-14.40	AVG	



Horizontal Polarization

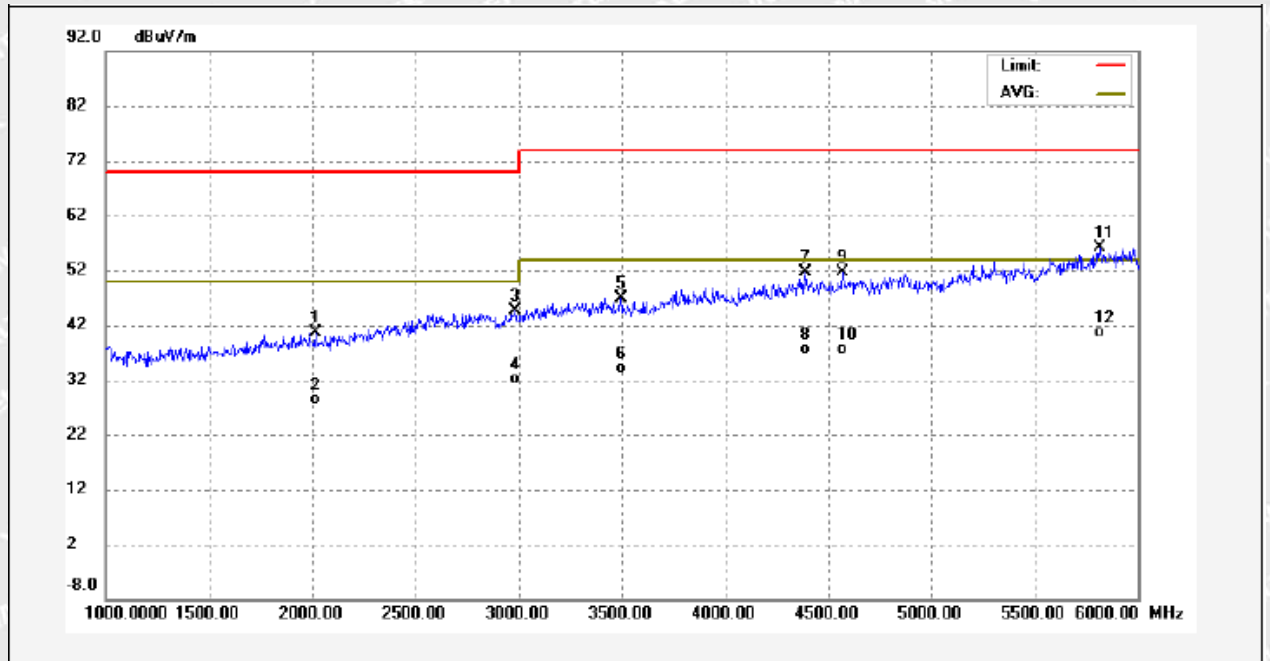


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2018.500	9.83	30.81	40.64	70.00	-29.36	peak	
2	2018.500	-2.47	30.81	28.34	50.00	-21.66	AVG	
3	2988.000	10.42	34.14	44.56	70.00	-25.44	peak	
4	2988.000	-1.89	34.14	32.25	50.00	-17.75	AVG	
5	3498.000	11.64	35.31	46.95	74.00	-27.05	peak	
6	3498.000	-1.13	35.31	34.18	54.00	-19.82	AVG	
7	4390.000	13.76	37.77	51.53	74.00	-22.47	peak	
8	4390.000	-0.21	37.77	37.56	54.00	-16.44	AVG	
9	4570.000	13.30	38.23	51.53	74.00	-22.47	peak	
10	4570.000	-0.55	38.23	37.68	54.00	-16.32	AVG	
11	5817.000	15.31	40.75	56.06	74.00	-17.94	peak	
12	5817.000	-0.02	40.75	40.73	54.00	-13.27	AVG	



Battery power mode


Vertical Polarization

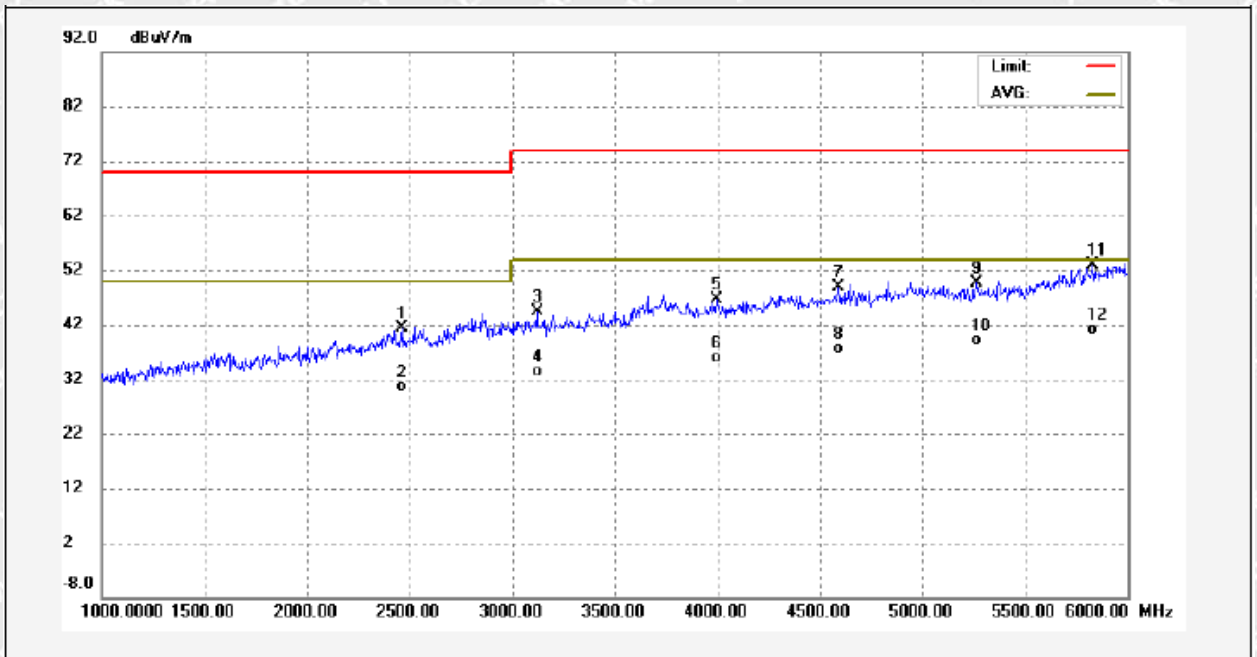

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2461.000	8.50	32.78	41.28	70.00	-28.72	peak	
2	2461.000	-2.07	32.78	30.71	50.00	-19.29	AVG	
3	3123.500	9.60	34.90	44.50	74.00	-29.50	peak	
4	3123.500	-1.47	34.90	33.43	54.00	-20.57	AVG	
5	3999.000	9.81	36.93	46.74	74.00	-27.26	peak	
6	3999.000	-1.16	36.93	35.77	54.00	-18.23	AVG	
7	4590.000	10.64	38.30	48.94	74.00	-25.06	peak	
8	4590.000	-0.60	38.30	37.70	54.00	-16.30	AVG	
9	5261.000	9.74	39.83	49.57	74.00	-24.43	peak	
10	5261.000	-0.73	39.83	39.10	54.00	-14.90	AVG	
11	5833.000	11.61	41.19	52.80	74.00	-21.20	peak	
12	5833.000	-0.10	41.19	41.09	54.00	-12.91	AVG	



Horizontal Polarization

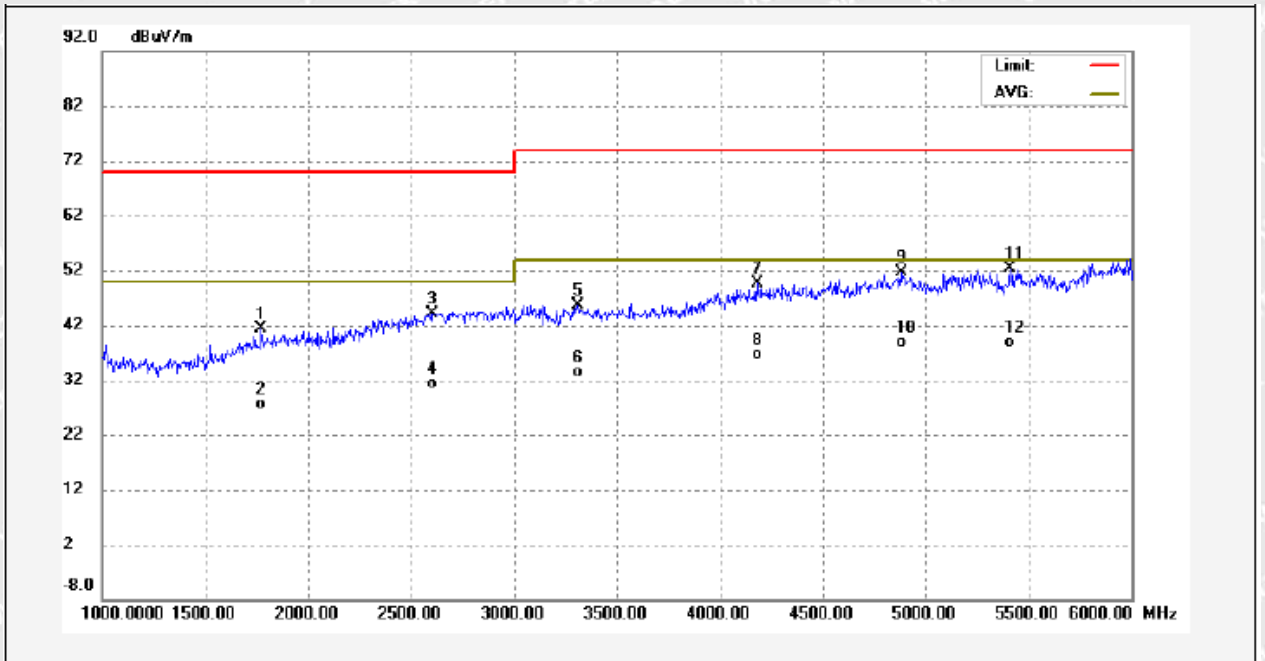

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1770.000	11.18	30.13	41.31	70.00	-28.69	peak	
2	1770.000	-2.44	30.13	27.69	50.00	-22.31	AVG	
3	2605.000	11.21	32.97	44.18	70.00	-25.82	peak	
4	2605.000	-1.62	32.97	31.35	50.00	-18.65	AVG	
5	3310.000	10.85	34.87	45.72	74.00	-28.28	peak	
6	3310.000	-1.40	34.87	33.47	54.00	-20.53	AVG	
7	4180.000	12.31	37.21	49.52	74.00	-24.48	peak	
8	4180.000	-0.64	37.21	36.57	54.00	-17.43	AVG	
9	4880.000	12.60	38.91	51.51	74.00	-22.49	peak	
10	4880.000	-0.12	38.91	38.79	54.00	-15.21	AVG	
11	5410.000	12.42	39.89	52.31	74.00	-21.69	peak	
12	5410.000	-0.97	39.89	38.92	54.00	-15.08	AVG	



5.4 Voltage Fluctuation and Flicker

Test Requirement : EN 61000-3-3

Test Method : EN 61000-3-3

Test Result : Pass

5.4.1 E.U.T. Operation

Operating Environment:

Temperature : 23.5°C

Humidity : 54.2%RH

Barometric Pressure : 100.8kPa


EUT Operation:

Input Voltage : AC 230V/50Hz

Operating Mode : Adapter power mode

5.4.2 Block Diagram of Setup

The Voltage Fluctuation and Flicker test was performed in accordance with the EN 61000-3-3.

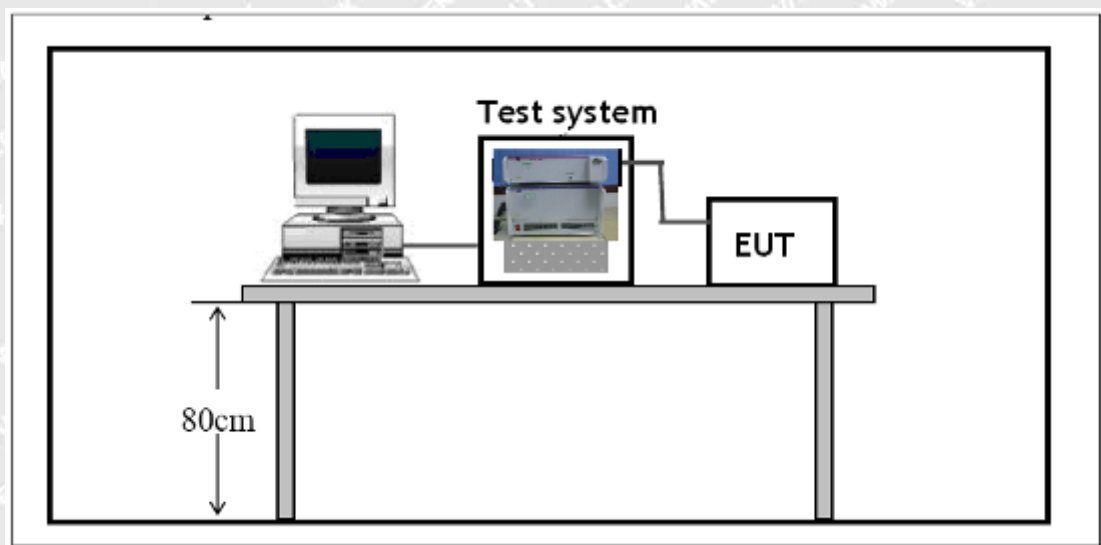



5.4.3 Voltage Fluctuation and Flicker Test Data

Flicker Test Summary per IEC61000-3-3:2013/AMD1:2017 (Run time)

EUT: Weatherstation MO6664 (WTF22F05099988W) Tested by: Mirror
 Test category: dt,dmax,dc and Pst (European limits) Test Margin: 100
 Test date: 2022/5/27 Start time: 8:57:13 End time: 9:07:40
 Test duration (min): 10 Data file name: F-000331.cts_data
 Comment: Adapter power mode
 Customer:

Test Result: Pass

Status: Test Completed

Pst: and limit line

European Limits



Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.22		
Highest dt (%):		Test limit (%):	
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.00	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass



6 Immunity Test Results

6.1 Performance Criteria

Performance criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Performance criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test

Performance criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

WALTEK



6.2 Electrostatic Discharge (ESD)

Test Requirement	:	EN 55035
Test Method	:	IEC 61000-4-2
Test Result	:	Pass
Discharge Impedance	:	330Ω / 150pF
Discharge Voltage	:	Air Discharge: ±8kV Contact Discharge: ±4kV HCP & VCP: ±4kV
Polarity	:	Positive & Negative
Number of Discharge	:	Minimum 10 times at each test point
Discharge Mode	:	Single Discharge
Discharge Period	:	1 second minimum

6.2.1 E.U.T. Operation

Operating Environment:


Temperature	:	22.4°C
Humidity	:	51.9%RH
Barometric Pressure	:	100.7kPa

EUT Operation:

Input Voltage	:	AC 230V/50Hz
Operating Mode	:	On mode

6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

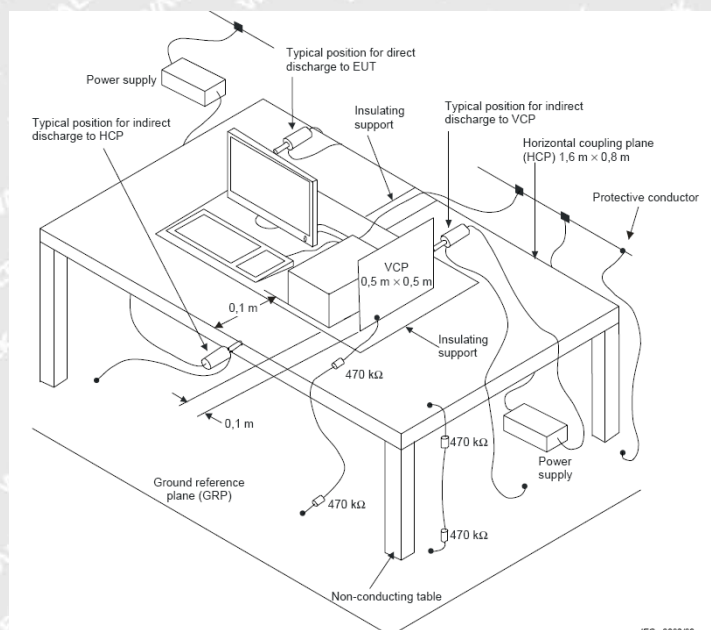



6.2.3 Direct Discharge Test Results

Observations:

Test points:

1. All Exposed Surface & Seams;
2. All metallic part

Direct Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
±8	B	1	N/A	Pass*
±4	B	2	Pass*	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

6.2.4 Indirect Discharge Test Results

Observations:

Test points:

1. All sides.

Indirect Discharge			Test Results	
Applied Voltage (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
±4	B	1	Pass*	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.3 Continuous RF Electromagnetic Field Disturbances

Test Requirement	: EN 55035
Test Method	: IEC 61000-4-3
Test Result	: Pass
Frequency Range	: 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Test level	: 3V/m
Modulation	: 80%, 1kHz Amplitude Modulation.
Face of EUT.....	: Front, Back, Left, Right
Antenna polarisation.....	: Horizontal & Vertical
Test Distance	: 3m

6.3.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.5°C
Humidity	: 47.3%RH
Barometric Pressure	: 100.2kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

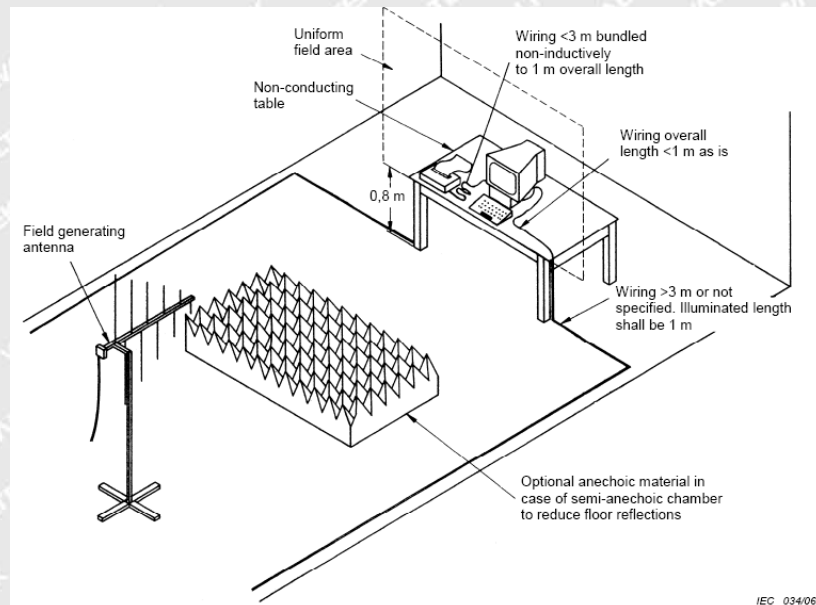



6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)



6.4 Electrical Fast Transients (EFT)

Test Requirement	:	EN 55035
Test Method	:	IEC 61000-4-4
Test Result	:	Pass
Test Level	:	1.0kV on AC Mains
Polarity	:	Positive & Negative
Repetition Frequency.....	:	5kHz
Burst Duration	:	5/50ns
Test Duration	:	2 minutes per level & polarity

6.4.1E.U.T. Operation

Operating Environment:

Temperature.....	:	21.7°C
Humidity	:	52.9%RH
Barometric Pressure	:	101.4kPa

EUT Operation:


Input Voltage.....	:	AC 230V/50Hz
Operating Mode	:	On mode

WALTEK



6.4.2 Block Diagram of Setup

The Electrical Fast Transients Immunity test was performed in accordance with the IEC 61000-4-4.

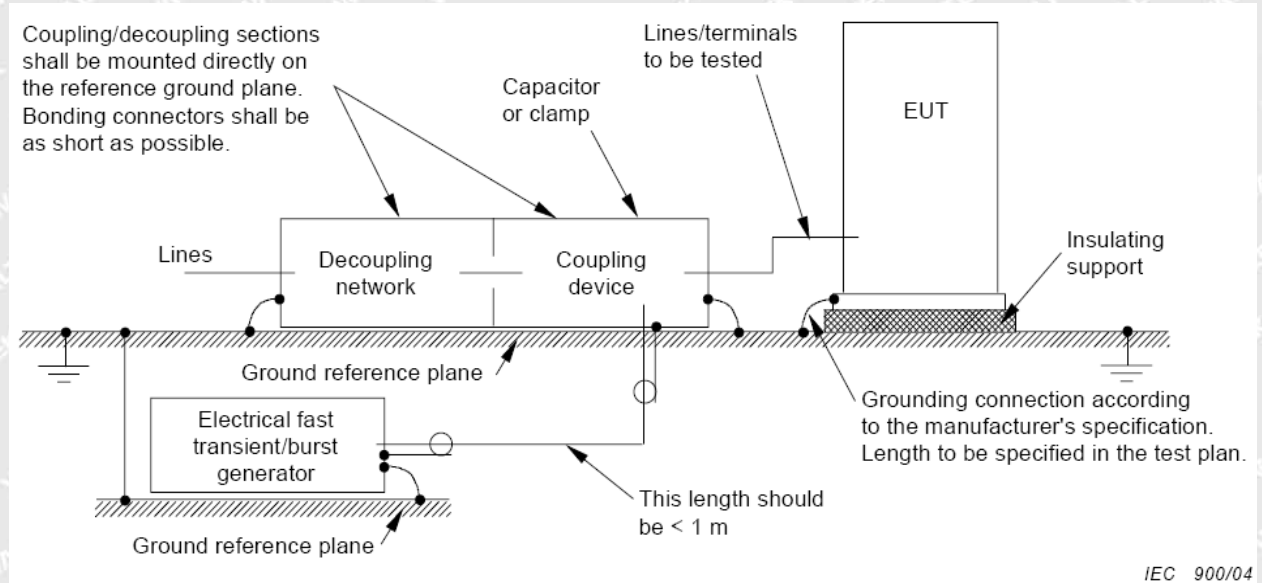

6.4.3 Test Results

Test Port	Test Level(kV)	Performance Criterion	Result
Line-Neutral	±1.0	B	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)



6.5 Surge

Test Requirement	: EN 55035
Test Method	: IEC 61000-4-5
Test Result	: Pass
Test level	: $\pm 1\text{kV}$ Live to Neutral, $\pm 2\text{kV}$ Live to PE and Neutral to PE
Interval	: 60s between each surge
No. of surges	: five positive and five negative pulses each at 0° , 90° , 180° and at 270°

6.5.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.1°C
Humidity	: 52.4%RH
Barometric Pressure	: 100.7kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.5.2 Block Diagram of Setup

The Surge Immunity test was performed in accordance with the IEC 61000-4-5.

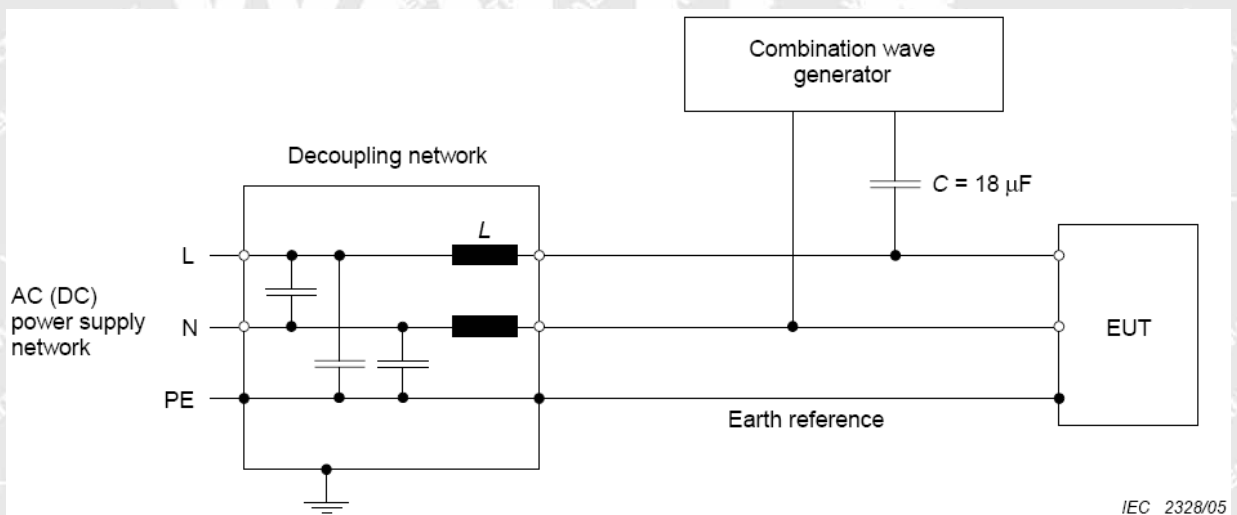



6.5.3 Test Result

Test Port	Applied Voltage (kV)	Performance criterion	Result
Between Phase And Phase	± 1	B	N/A
Between Live And Neutral	± 1	B	Pass*
Between Live And Earth	± 2	B	N/A
Between Neutral And Earth	± 2	B	N/A

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.6 Continuous Induced RF Disturbance

Test Requirement	: EN 55035
Test Method	: IEC 61000-4-6
Test Result	: Pass
Frequency Range	: 0.15 to 10MHz, 10 to 30MHz, 30 to 80MHz
Test level	: 3V r.m.s. /3~1V r.m.s. / 1V r.m.s. (unmodulated emf into 150 Ω)
Modulation	: 80%, 1kHz Amplitude Modulation.

6.6.1 E.U.T. Operation

Operating Environment:


Temperature	: 21.7°C
Humidity	: 51.6%RH
Barometric Pressure	: 101.4kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.6.2 Block Diagram of Setup

The Injected Currents Immunity test was performed in accordance with the IEC 61000-4-6.

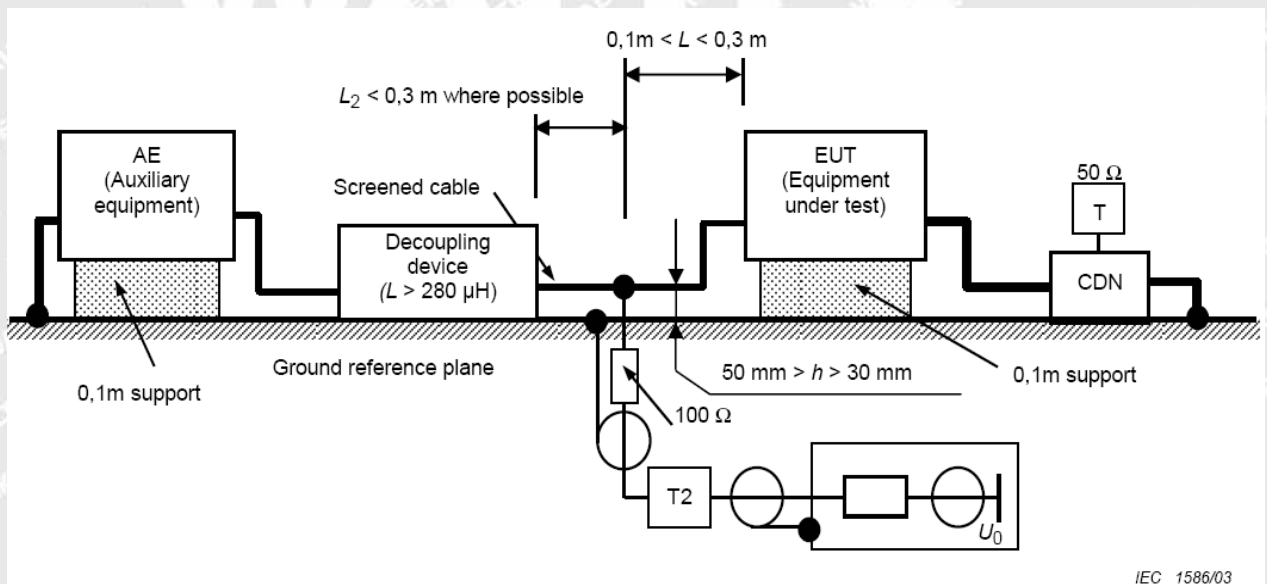



6.6.3 Test Results

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Performance Criterion	Result
0.15MHz to 10MHz	2 Wire AC Supply Cables	3Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
10MHz to 30MHz	2 Wire AC Supply Cables	3 to 1 Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
30MHz to 80MHz	2 Wire AC Supply Cables	1Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*

Remark:

- * During the test no deviation was detected to the selected operation mode(s)

WALTEK



6.7 Voltage Dips and Interruptions

Test Requirement	: EN 55035
Test Method	: IEC 61000-4-11
Test Result	: Pass
Test Level(Voltage reduction)	: >90% & 30 % of Induction
No. of Dips / Interruptions	: 1 per Level at 20ms intervals

6.7.1 E.U.T. Operation

Operating Environment:


Temperature	: 22.6°C
Humidity	: 51.9%RH
Barometric Pressure	: 100.6kPa

EUT Operation:

Input Voltage	: AC 230V/50Hz
Operating Mode	: On mode

6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the IEC 61000-4-11.

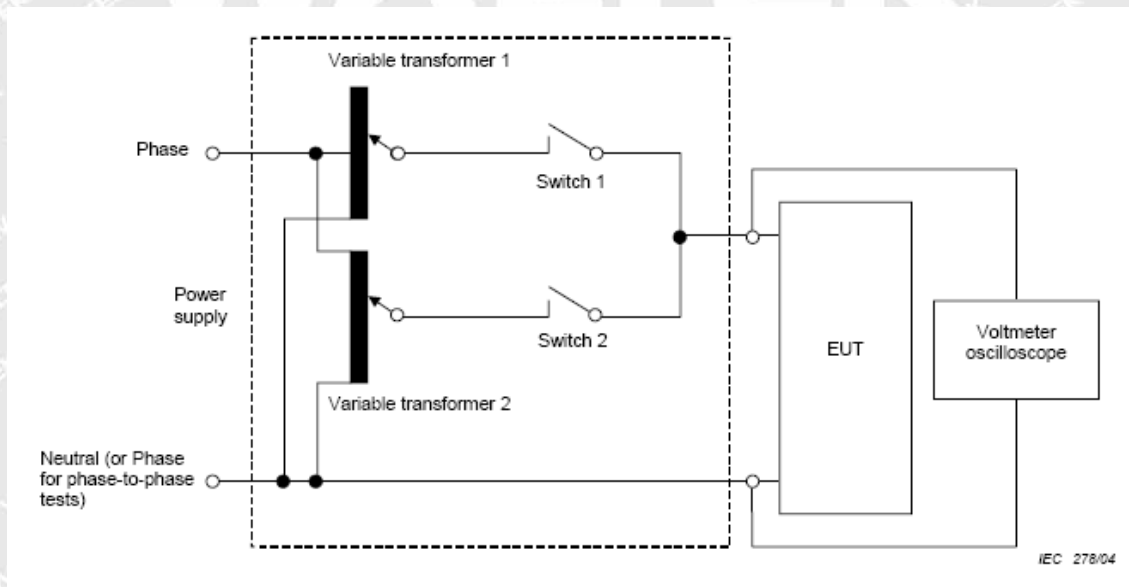



6.7.3 Test Results

Test Item	Test Level in %U _T	Performance criterion	50Hz		60Hz	
			Duration	Result	Duration	Result
Voltage Dips	< 5	B	0.5	Pass*	0.5	Pass*
	70	C	25	Pass*	30	Pass*
Voltage Interruptions	< 5	C	250	Pass*	300	Pass*

Remark:

* During the test no deviation was detected to the selected operation mode(s)

WALTEK




7 Photographs – Test Setup

7.1 Photograph – Mains Terminal Disturbance Voltage Test Setup



7.2 Photograph – Radiated Emission Test Setup, 30MHz to 1GHz

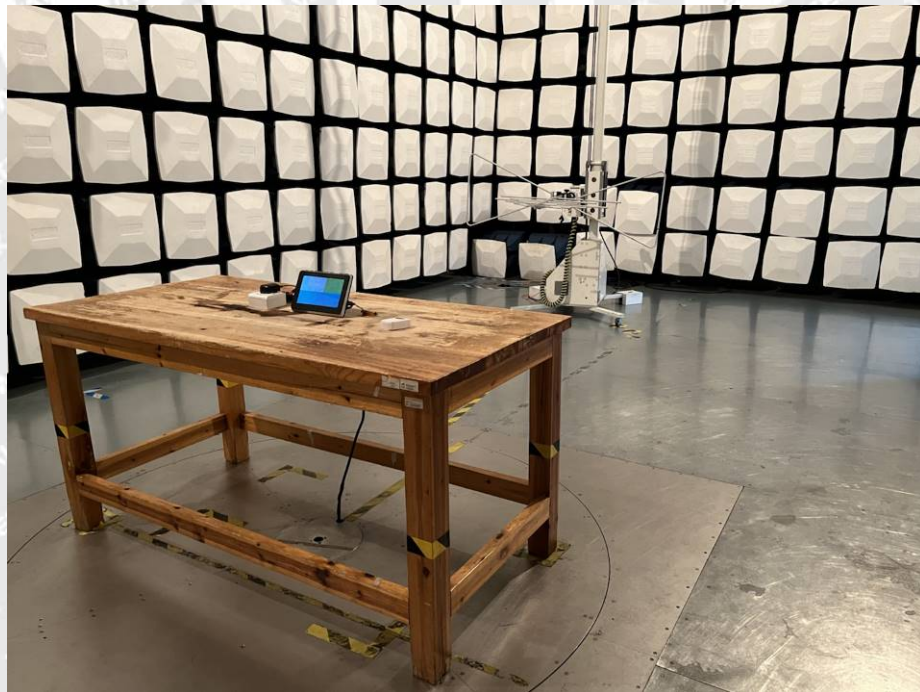



7.3 Photograph – Radiated Emission Test Setup, 1GHz to 6GHz




7.4 Photograph – Voltage Fluctuation and Flicker Test Setup





7.5 Photograph – ESD Immunity Test Setup

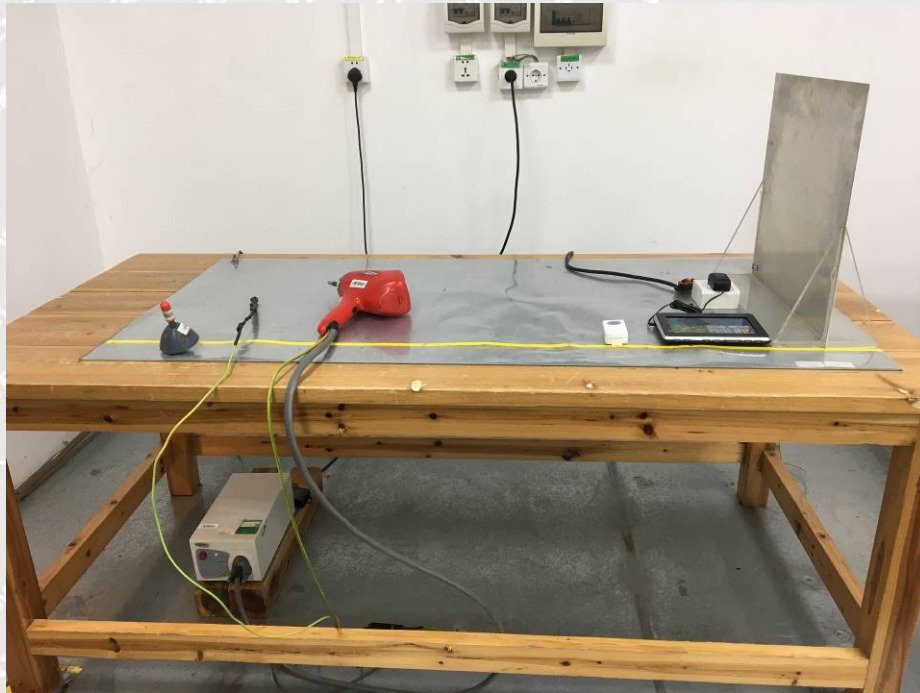

7.6 Photograph – Continuous RF Electromagnetic Field Disturbances Test Setup





7.7 Photograph – EFT Immunity Test Setup




7.8 Photograph – Surge Immunity Test Setup






7.9 Photograph – Continuous Induced RF Disturbance Test Setup

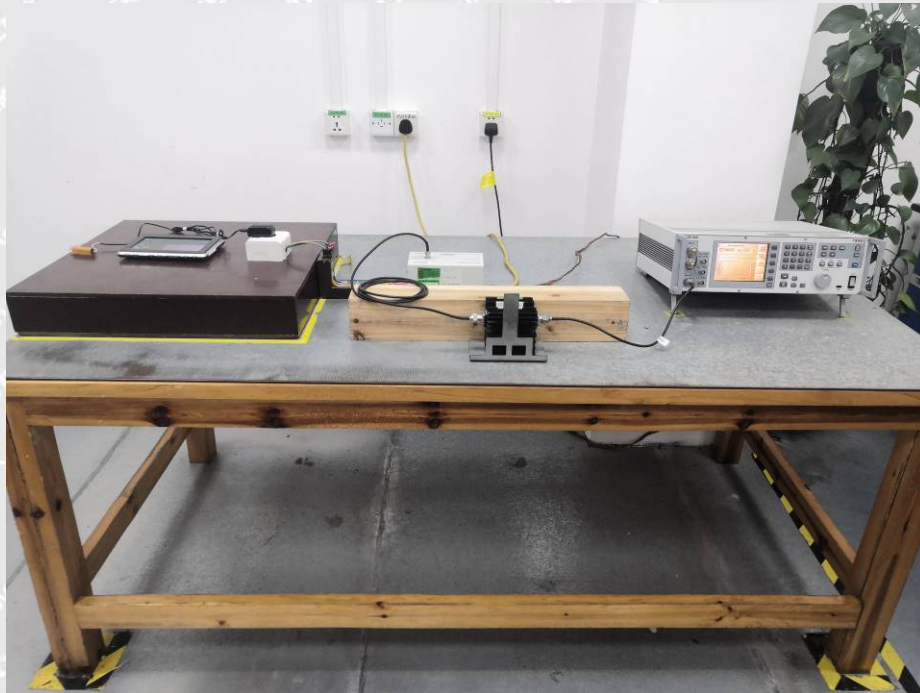

7.10 Photograph – Voltage Dips and Interruptions Immunity Test Setup

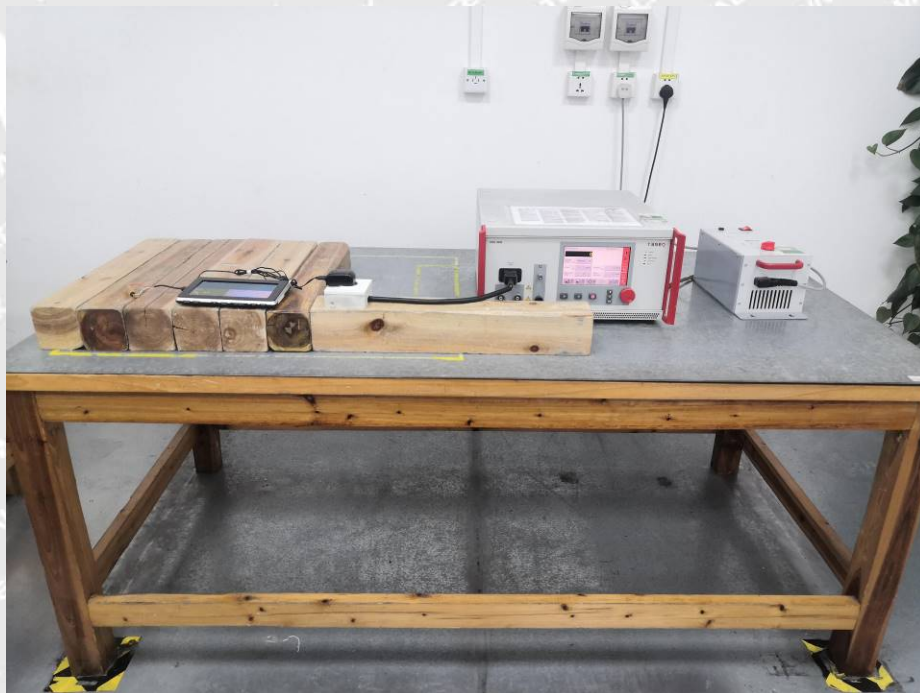



8 Photographs – Constructional Details

8.1 EUT – Front View



8.2 EUT – Back View





8.3 EUT – Adapter Label View



==== End of Report =====

WALTEK